

DESCRIPTION

PMI MODEL PTB-60-2040-5R0-10-220VAC-292FF IS A PORTABLE AMPLIFIER THAT OPERATES OVER THE 20.0 TO 40.0 GHz FREQUENCY RANGE. THIS MODEL PROVIDES 60 dB OF TYPICAL GAIN WITH AN OP1dB OF +10 dBm MINIMUM. THIS AMPLIFIER FEATURES AN ON/OFF SWITCH THAT IS LOCATED ON THE FRONT PANEL. THIS UNIT OPERATES ON 220 to 230 VAC AND IS SUPPLIED WITH A 6 FOOT STANDARD EU 2-PRONG STYLE POWER CORD.

SPECIFICATIONS

- FREQUENCY RANGE: _____ 20.0 TO 40.0 GHz
- GAIN: _____ +60 dB TYP
- GAIN FLATNESS: _____ ± 3.0 dB MAX
- NOISE FIGURE: _____ 5.0 dB TYP *
- OP1dB: _____ +10 dBm MIN
- VSWR (IN/OUT): _____ 2.0:1 MAX
- CONNECTORS (IN/OUT): _____ 2.92mm FEMALE
- AC VOLTAGE SUPPLY: _____ 220 - 230 VAC

*SUPPLIED WITH A 6 FOOT STANDARD EU 2-PRONG STYLE POWER CORD

- SIZE _____ (L) 4.92" X (W) 4.92" X (H) 2.26"
- FINISH _____ BLUE POWDER COATED

*NOTE: MEASURED TO 26.5 GHz


ENVIRONMENTAL RATINGS

- **TEMPERATURE:** _____ -40°C TO +85°C (OPERATING)
_____ -40°C TO +100°C (NON-OPERATING)
- **HUMIDITY:** _____ MIL-STD-202F, METHOD 103B COND. B
- **SHOCK:** _____ MIL-STD-202F, METHOD 213B COND. B
- **VIBRATION:** _____ MIL-STD-202F, METHOD 204D COND. B
- **ALTITUDE:** _____ MIL-STD-202F, METHOD 105C COND. B
- **TEMPERATURE CYCLE:** _____ MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

NOTES:
1) DIMENSIONS ARE IN INCHES
2) TOLERANCES: X.XX ± 0.020
X.XXX ± 0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	11/12/15	

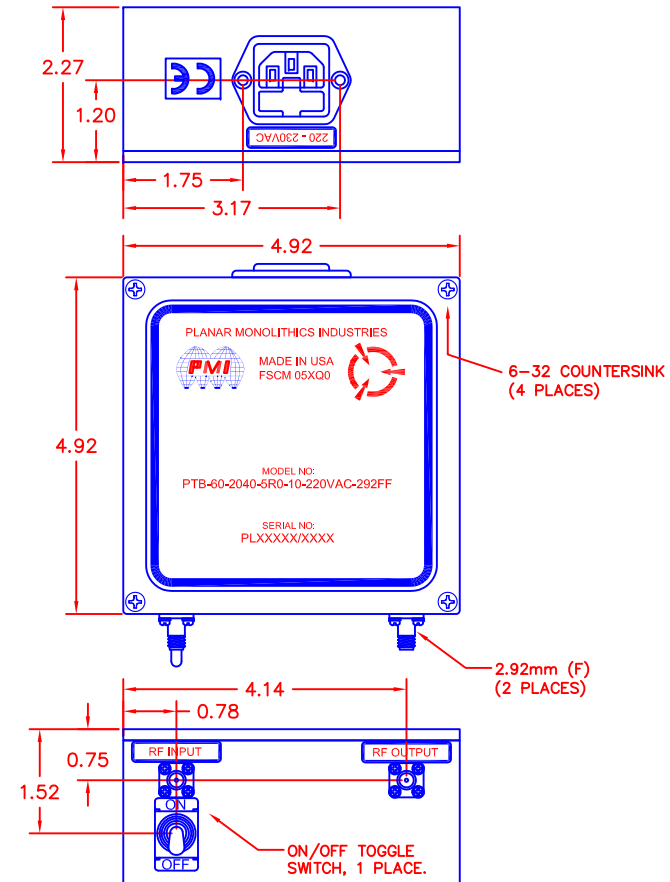

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE		
DRAWN <i>SAB</i>		11/12/15		PRODUCT FEATURE		
REDRAWN				PTB-60-2040-5R0-10-220VAC-292FF		
ISSUED				SIZE	FSCM NO.	DWG NO.
				A	05XQ0	27027982
				SCALE	N: S	SHEET 1 OF 1