

CATALOG NUMBER



A3A4-0539-03

MATERIAL AND FINISH


HOUSING: CRES 303; PASSIVATED

BUSHING AND CONTACT PIN: BeCu; GOLD PLATE 75 MICROINCHES TYPICAL
OVER NICKEL PLATE 100 MICROINCHES TYPICAL

DIELECTRICS: VIRGIN PTFE

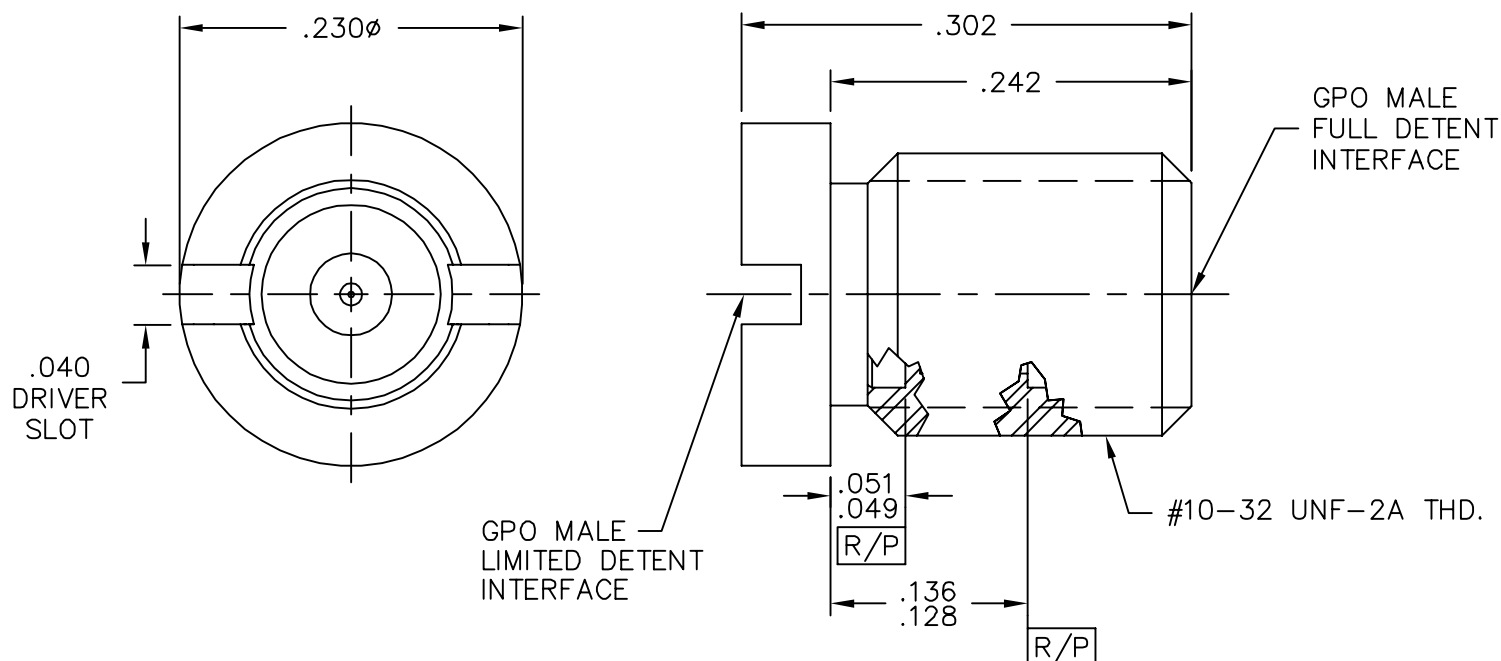

RECOMMENDED MOUNTING HOLE

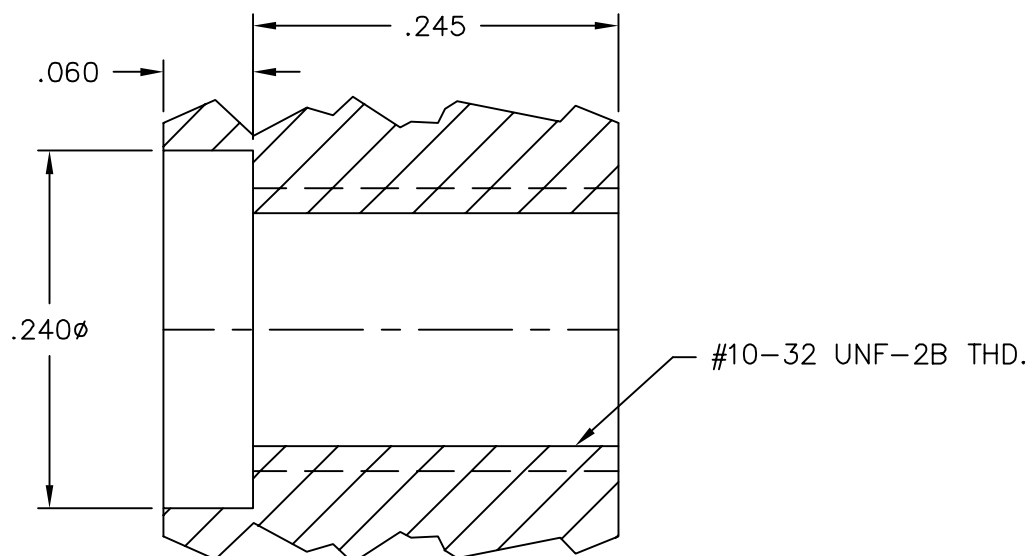

CORNING RESTRICTED – This drawing and any data contained herein is the proprietary and confidential information of Corning. Neither receipt nor possession of this drawing provides any right to duplicate, use, or disclose any information contained herein except with the express written consent of Corning.

EXPORT CONTROL – This document contains information within the purview of the Export Administration Regulations (EAR), 15 CFR 730-774, and may be export controlled.

GPO MALE FULL DETENT TO
GPO MALE LIMITED DETENT THREAD-IN
ADAPTER NON-HERMETIC

IDENT CODE:

82316

REVISION: 01

Corning Gilbert Inc.

SOURCE FILE: SK-2175

DWG. NO.: OL-A3A4-0539-03

ASSY. PROC.:

—