


DASH #	BODY MATERIAL	BODY FINISH	CONTACT FINISH	SLEEVE MATERIAL	SLEEVE FINISH
-1	BERYLLIUM COPPER	NICKEL	GOLD	STAINLESS STEEL	PASSIVATED

A) ELECTRICAL SPECS;

1. IMPEDANCE/50 OHMS
2. VOLTAGE RATING/1500 VOLTS PEAK.
3. INSULATION RESISTANCE/5000 MEGOHMS MIN.
4. FREQUENCY RANGE/0 TO 11 GHz

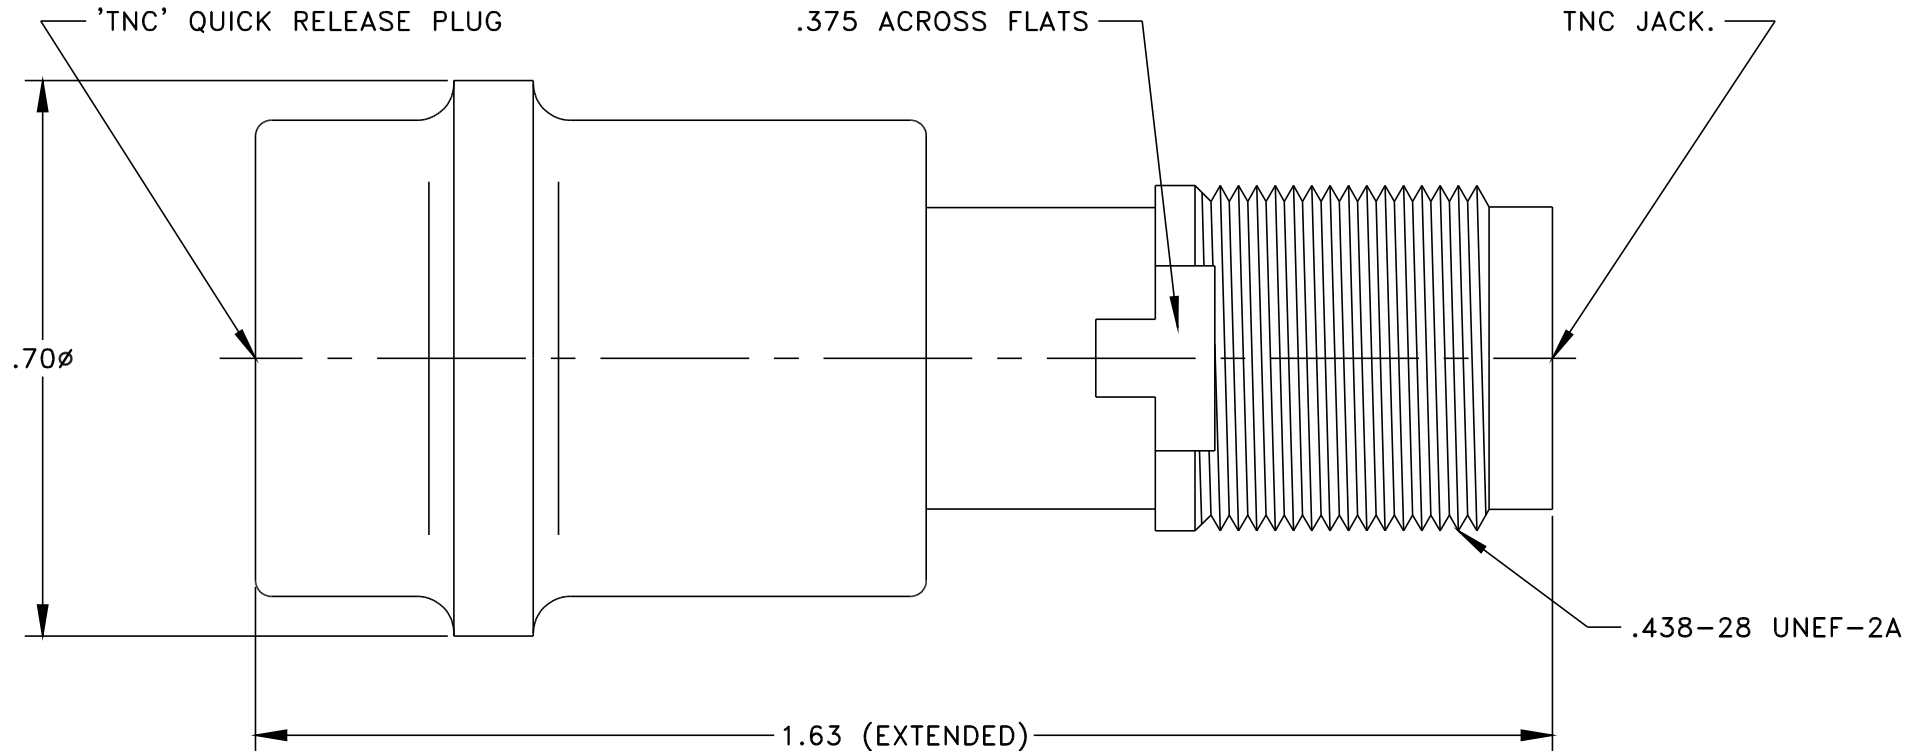

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

CONNECTRONICS, INC.
EDINBURGH, INDIANA

FSCM 43608

TOLERANCES
UNLESS OTHERWISE SPECIFIED

DWG BY: JOHN B. DATE: 6/23/99

APVD BY: SCALE: _____

MATERIAL: _____

FINISH: _____

DESCRIPTION: TNC
PLUG TO JACK QUICK
RELEASE TEST ADAPTOR

2 PL DEC $\pm .020$ 3 PL DEC $\pm .005$ ANG. DIM $\pm 1/2^\circ$

DRAWING NO.
44-613
SHT 1 OF 1

REVISIONS

ECN2469
-A-
ADDED ELECTR. SPECS.
9/11/00
RLC