

DASH #	BODY MATERIAL	BODY FINISH	CONTACT FINISH	'A'	'B'
-1	STAINLESS	PASSIVATED	GOLD	.270	.79 REF
-2	STAINLESS	PASSIVATED	GOLD	.305	.82 REF
-3	BRASS	NICKEL	GOLD	.270	.79 REF



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

NOTES:

- A) ELECTRICAL SPECS;
 -IMPEDANCE / 50 OHMS.
 -VOLTAGE RATING/500 VRMS.
 -INSULATION RESISTANCE / 5,000 MEGOHMS MIN.
 -DIELECTRIC WITHSTANDING VOLTAGE / 1,500 VRMS.
 -FREQUENCY RANGE 0 TO 18 Ghz.

B) TEMPERATURE RANGE / -65° TO +165° C.

C) DURABILITY / 500 MATING CYCLES MIN.

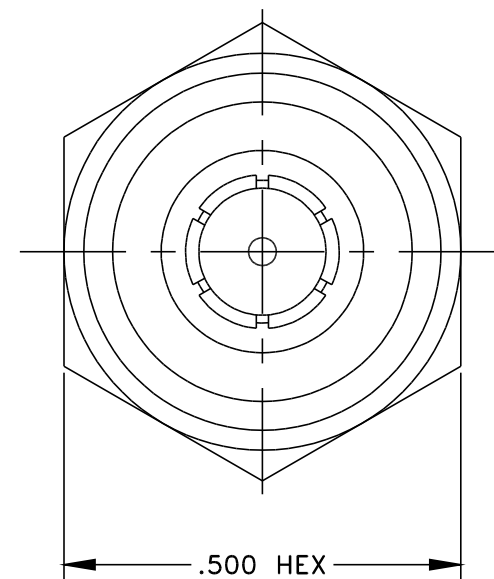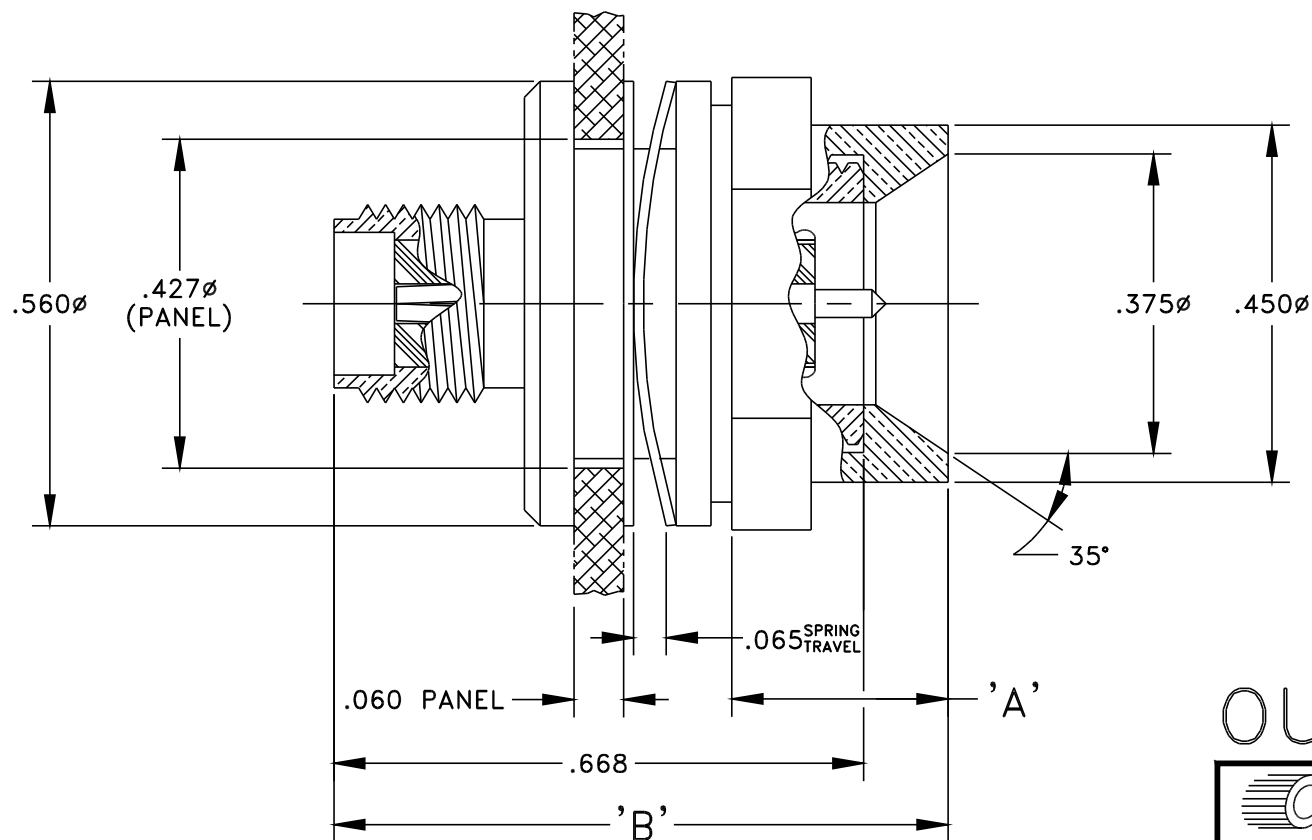

OUTLINE DRAWING

CONNECTRONICS, INC.
EDINBURGH, INDIANA

FSCM 43608

TOLERANCES
UNLESS OTHERWISE SPECIFIED

DWG BY: RLC DATE: 8/23/01

APVD BY: SCALE: _____

MATERIAL: _____

FINISH: _____

DESCRIPTION: SMA
ADAPTOR, JACK TO QUICK
DISCONNECT PLUG

2 PL DEC $\pm .020$ 3 PL DEC $\pm .005$ ANG. DIM $\pm 1/2^\circ$

DRAWING NO.
42-623
SHT 1 OF 1

REVISIONS

-A-
ECN2950
ADDED NOTES.
JB 2/25/02