

DASH #	'A' Ø				
-1	.103				
-2	#2-56 TAP				

NOTES:

A) ELECTRICAL SPECS;

- IMPEDANCE / 50 OHMS.
- VOLTAGE RATING / 335 VRMS.
- INSULATION RESISTANCE / 5,000 MEGOHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE / 1,000 VRMS.
- FREQUENCY RANGE / DC TO 18 GHz.

B) TEMPERATURE RANGE / -65° TO +165° C.



C) MATERIAL;

- BODY / 303 STAINLESS STEEL PER QQ-S-764.
- CONTACT / BERYLLIUM COPPER PER QQ-C-360.
- INSULATOR / TEFLON PER ASTM-D1457.

D) FINISH;

- BODY / PASSIVATED
- CONTACT / GOLD PLATED.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

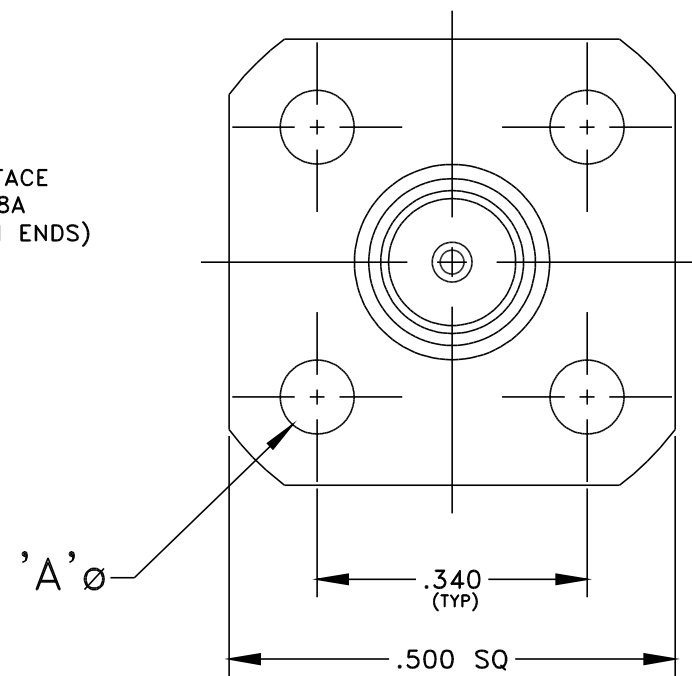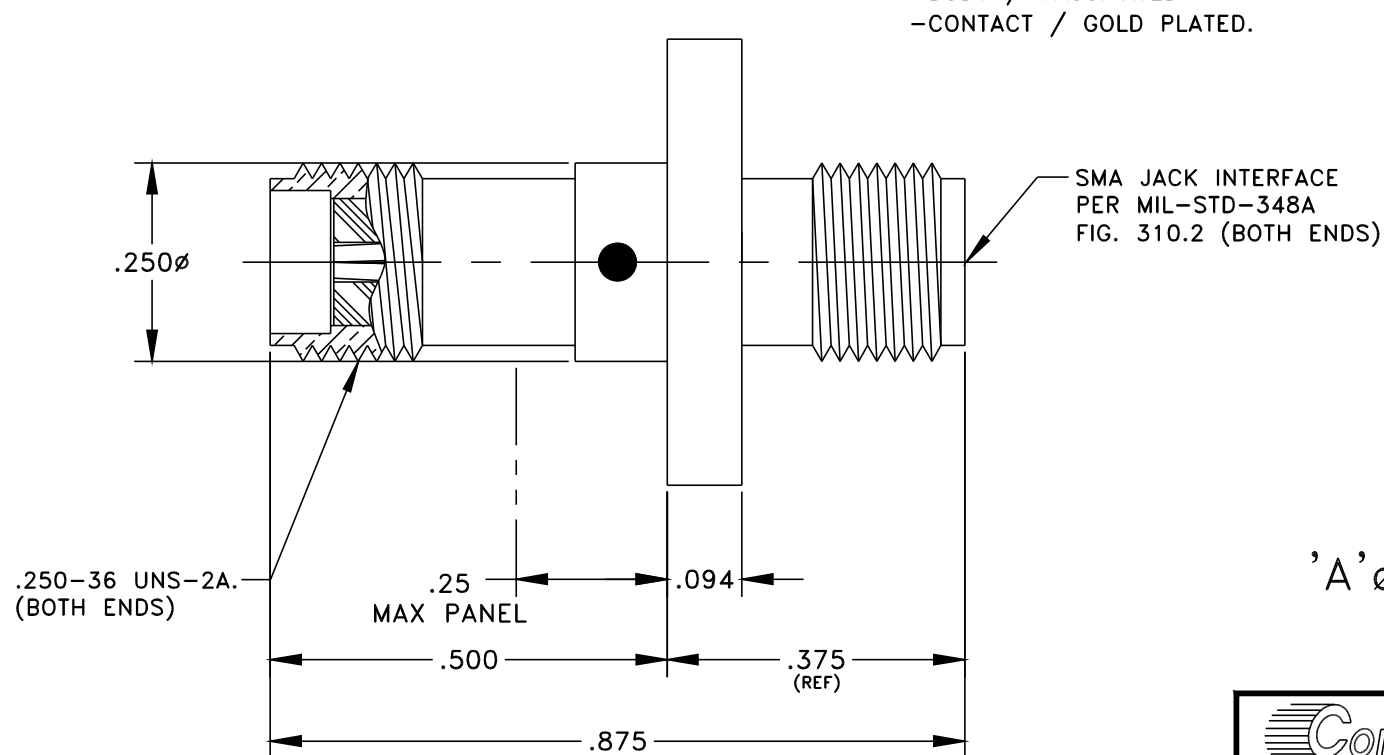

CONNECTRONICS, INC.
EDINBURGH, INDIANA

FSCM 43608

TOLERANCES
UNLESS OTHERWISE SPECIFIED

DWG BY: DZ DATE: 3/28/11

APVD BY: SCALE: _____

MATERIAL: _____

FINISH: _____

DESCRIPTION: SMA
ADAPTOR, JACK TO JACK,
4 HOLE FLANGE MOUNT

2 PL DEC $\pm .020$ 3 PL DEC $\pm .005$ ANG. DIM $\pm 1/2^\circ$

DRAWING NO.
42-612
SHT 1 OF 1

REVISIONS

-A-

REV

OUTLINE DRAWING