

DESCRIPTION

PMI MODEL PTB-30-28-5R0-20-115VAC-SFF IS A PORTABLE AMPLIFIER THAT OPERATES OVER THE 2.0 TO 8.0 GHz FREQUENCY RANGE. THIS MODEL PROVIDES 30dB MINIMUM OF GAIN WITH AN OP1dB OF +20dBm MINIMUM. THIS AMPLIFIER FEATURES AN ON/OFF SWITCH THAT IS LOCATED ON THE FRONT PANEL.

SPECIFICATIONS

- FREQUENCY RANGE: _____ 2.0 TO 8.0 GHz
- GAIN: _____ +30 dB MIN
- GAIN FLATNESS: _____ ±1.5 dB MAX
- NOISE FIGURE: _____ 5.0dB MAX
- OP1dB: _____ +20dBm MIN
- VSWR (IN/OUT): _____ 2.0:1 MAX
- CONNECTORS (IN/OUT): _____ SMA FEMALE
- AC VOLTAGE SUPPLY: _____ 115VAC, 60Hz
*SUPPLIED WITH FUSE AND 6 FOOT POWER CORD
- SIZE _____ (L) 4.92" X (W) 4.92" X (H) 2.26"
- FINISH _____ BLUE POWDER COATED


ENVIRONMENTAL RATINGS

- **TEMPERATURE:** _____ -40°C TO +85°C (OPERATING)
-40°C TO +100°C (NON-OPERATING)
- **HUMIDITY:** _____ MIL-STD-202F, METHOD 103B COND. B
- **SHOCK:** _____ MIL-STD-202F, METHOD 213B COND. B
- **VIBRATION:** _____ MIL-STD-202F, METHOD 204D COND. B
- **ALTITUDE:** _____ MIL-STD-202F, METHOD 105C COND. B
- **TEMPERATURE CYCLE:** _____ MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

NOTES:
1) DIMENSIONS ARE IN INCHES
2) TOLERANCES: X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	06/26/15	

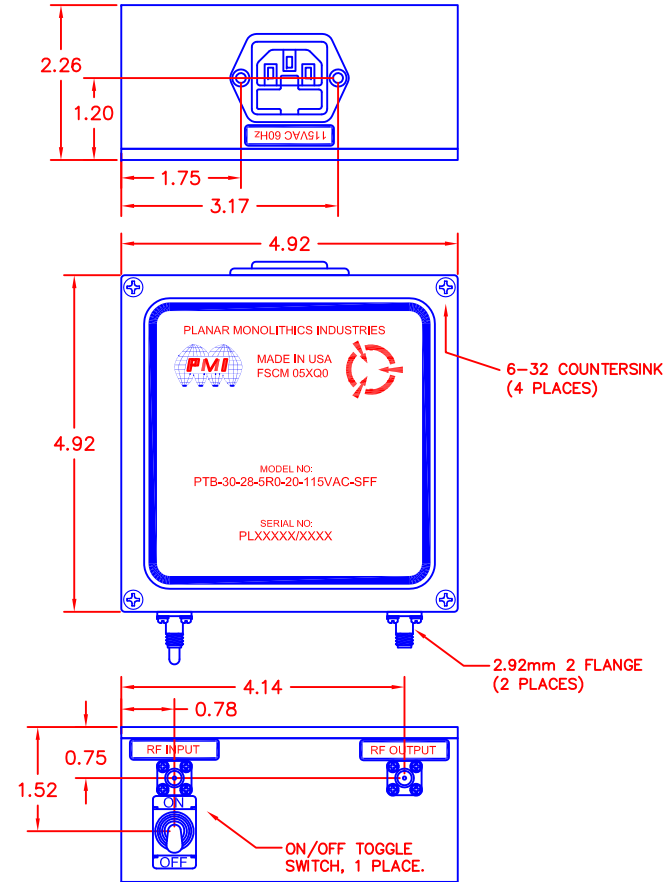

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN <i>EMF</i>		06/26/15	PRODUCT FEATURE		
REDRAWN			PTB-30-28-5R0-20-115VAC-SFF		
ISSUED			SIZE	FSCM NO.	DWG NO.
			A	05XQ0	PRELIMINARY
			SCALE	N: S	SHEET 1 OF 1