


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

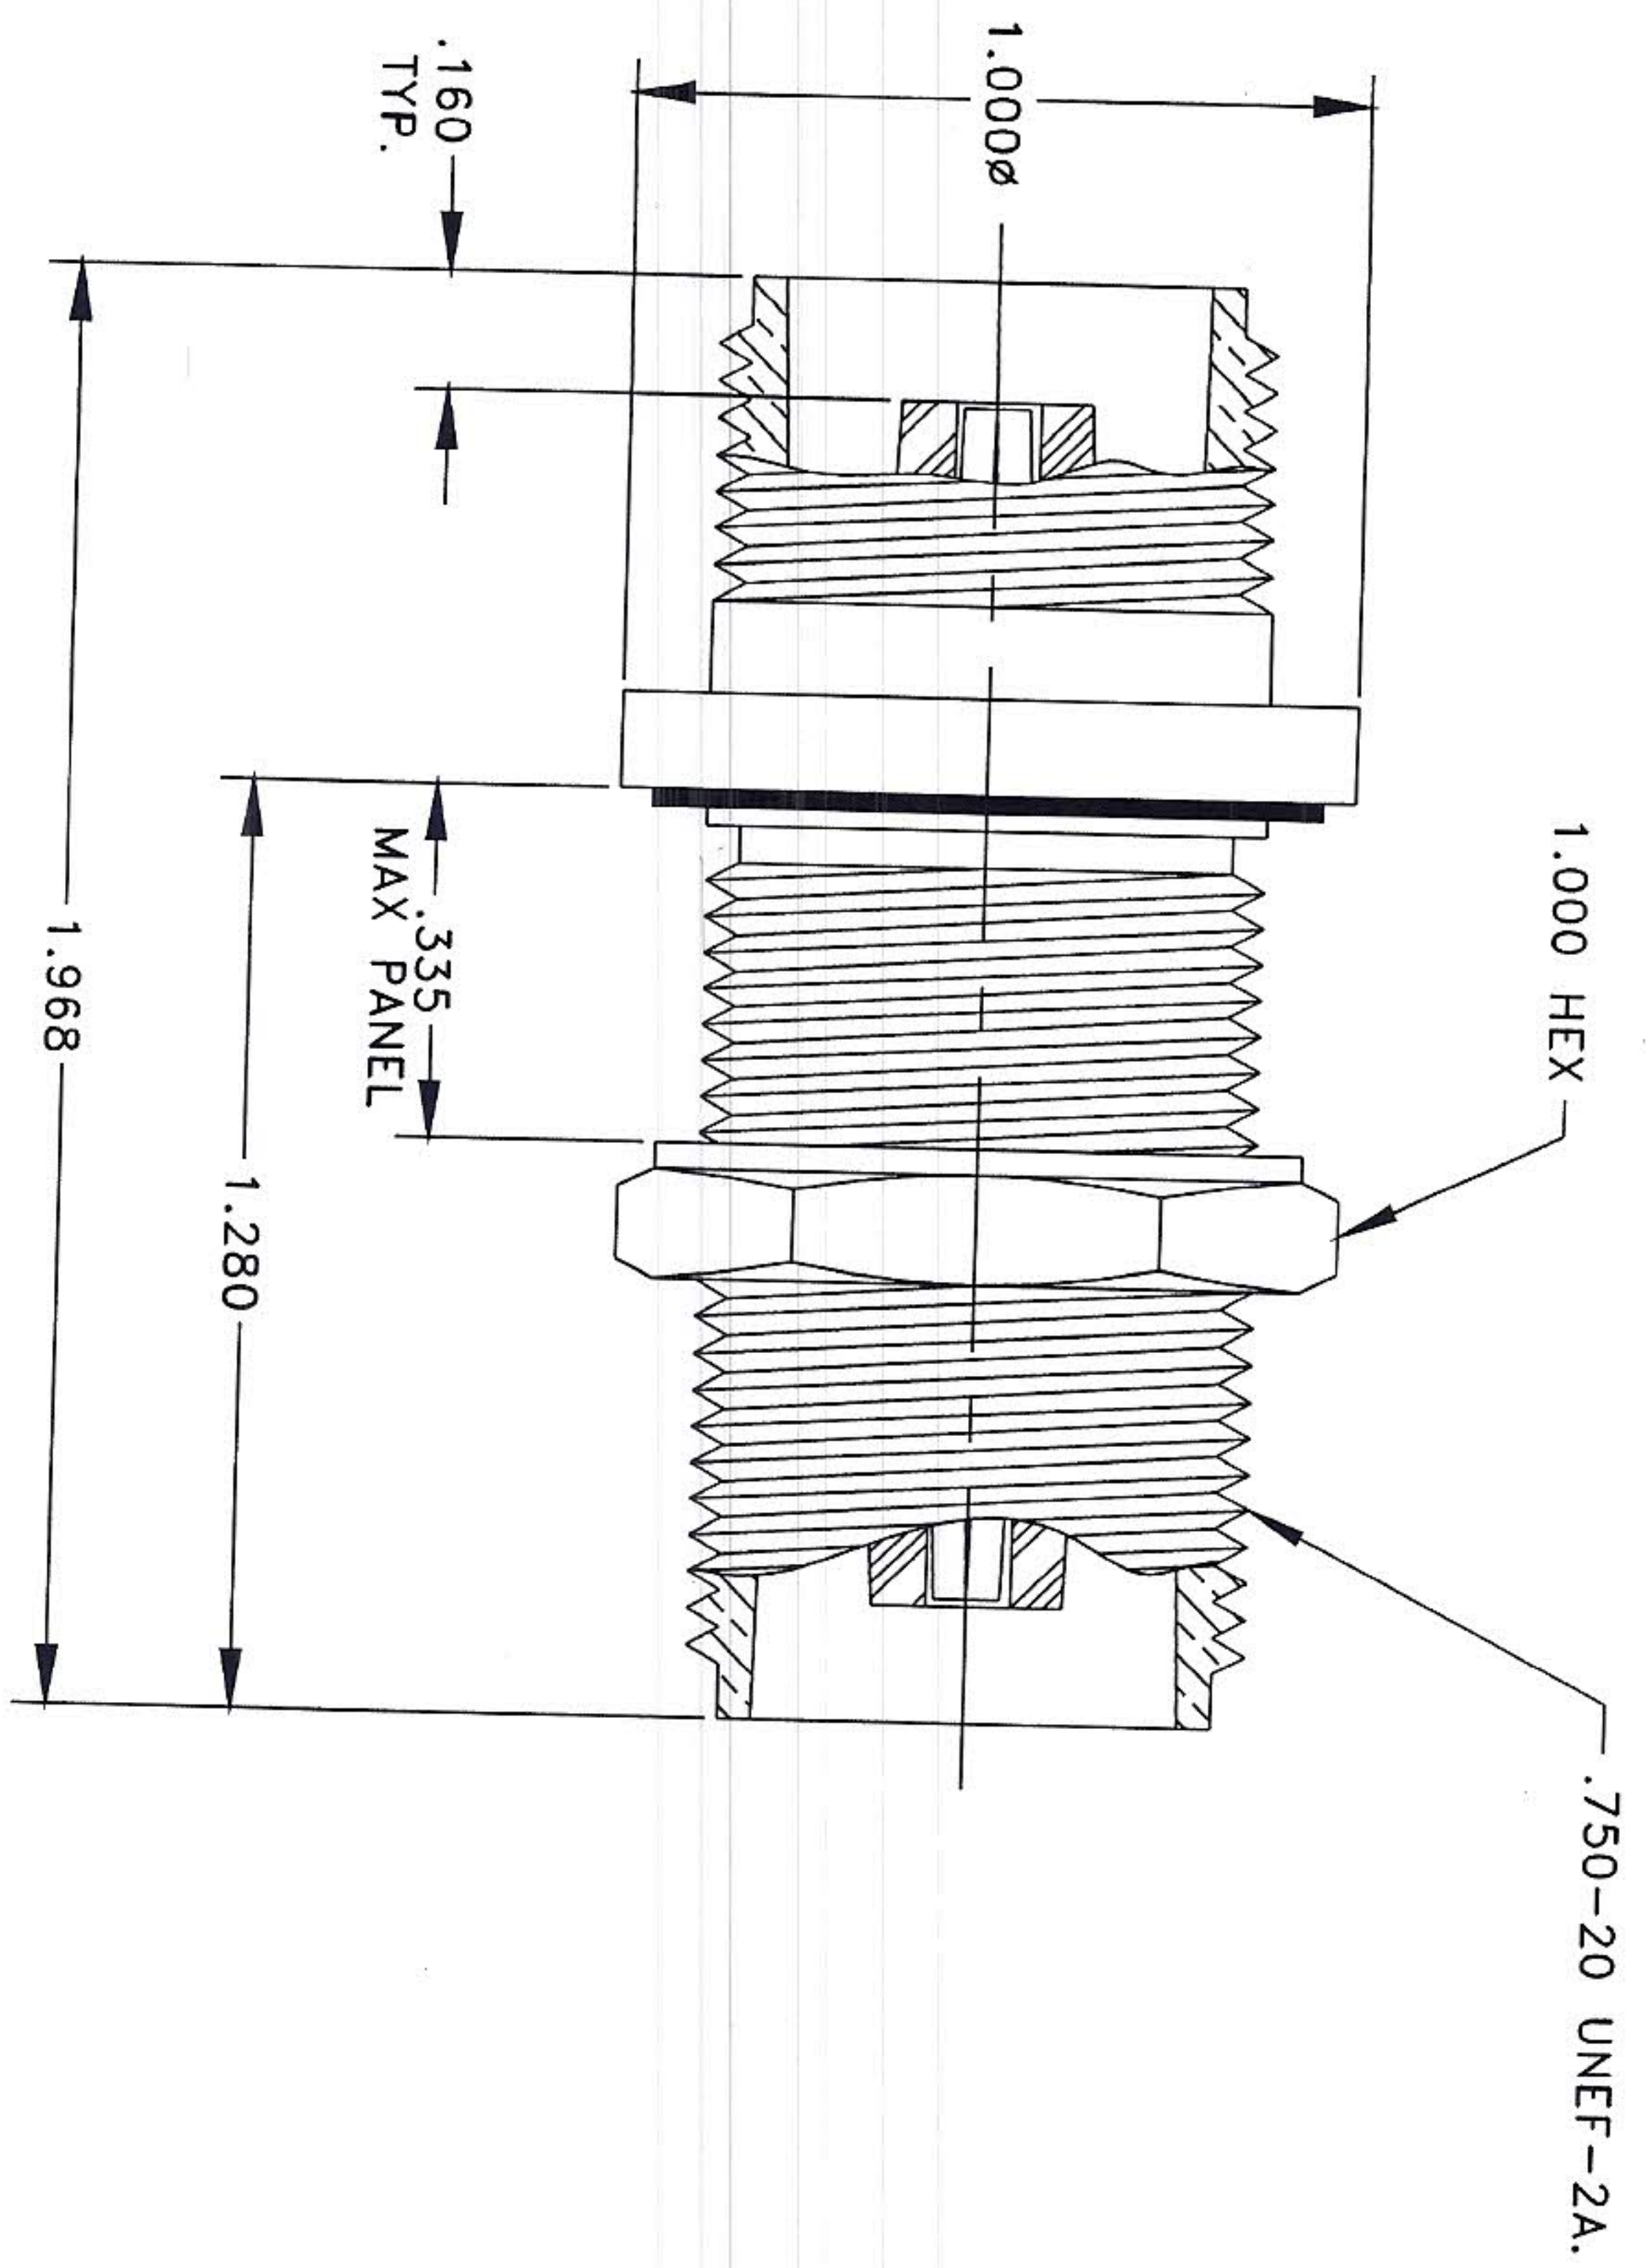

OUTLINE DRAWING

REVISIONS

REV LEVEL -A-

CONNECTRONICS, INC.
EDINBURGH, INDIANA

FSCM 43608

DWG BY: RLC DATE: 11/26/07

TOLERANCES
UNLESS OTHERWISE SPECIFIED

APVD BY: SCALE: _____

2 PL DEC ± .020

MATERIAL: _____

3 PL DEC ± .005

FINISH: _____

ANG. DIM ± 1/20

DESCRIPTION: HN

DRAWING NO.

ADAPTOR, JACK TO JACK,
BULKHEAD

56-602-1
SHT 1 OF 1

MATERIALS & FINISHES

BODY

- (X) BRASS, COMP. 22, 1/2 HD PER QQ-B-626
- () 303 STAINLESS STEEL PER QQ-S-764
- () BERYLLIUM COPPER PER QQ-C-530

PLATING

- (X) NICKEL
- () SILVER
- () GOLD
- () PASSIVATE

INSULATOR

- (X) TEFLON PER L-P-403
- () BLACK NORLYL
- () REXOLITE
- () DELRIN
- () NYLON

CONTACT

- () BRASS, COMP. 22, 1/2 HD PER QQ-B-626
- (X) BERYLLIUM COPPER PER QQ-C-530

PLATING

- () NICKEL
- (X) SILVER
- () GOLD
- () TRI-M3

SPECIFICATIONS

IMPEDANCE

- (X) 50 OHMS
- () 75 OHMS
- () NON-CONSTANT

FREQUENCY RANGE: 0 TO 4 GHz

VOLTAGE RATING: 1500V RMS

DIELECTRIC WITHSTANDING VOLTAGE:

5000 VOLTS RMS


INSULATION RESISTANCE:

5000 MEGOHMS MIN.

TEMP. RANGE: -65°C TO +165°C

MISCELLANEOUS

REVISIONS



CONNEXTRONICS INC.
EDINBURGH, INDIANA

DWG BY: RLC

DATE: 11/26/07

APVD BY:

SCALE:

MATERIAL:

FINISH:

DESCRIPTION: HN

ADAPTOR, JACK TO JACK,
BULKHEAD

FSCM 43608

TOLERANCES
UNLESS OTHERWISE SPECIFIED

2 PL DEC ± .020

3 PL DEC ± .005

ANG. DIM ±1/20

DRAWING NO.

56-602-1

SHT 2 OF 2