


4 3 2 1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

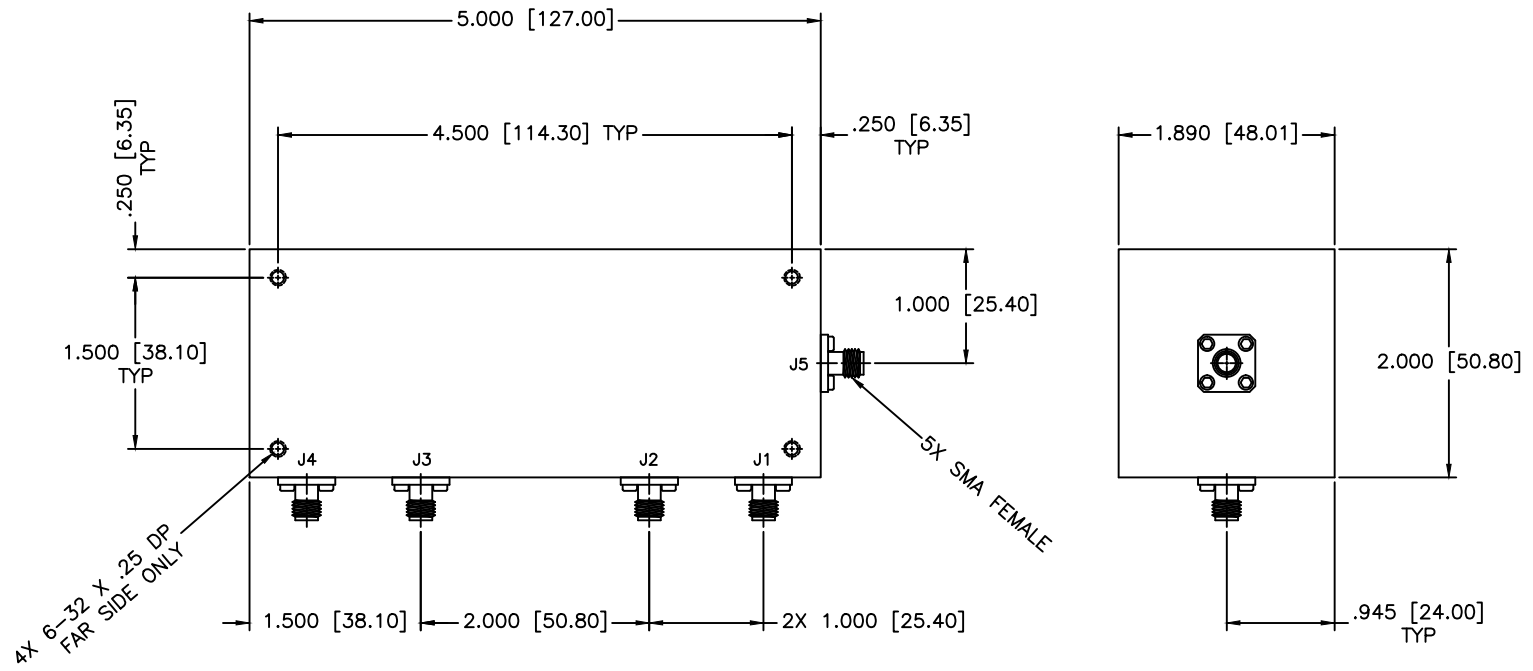

SPECIFICATIONS

Frequency Range: 100–1000 MHz
 Insertion Loss: 0.70dB Min.
 Isolation: 20dB Min.
 Power Rating: 25 W CW
 Amplitude Balance: ± 0.40 dB Max.
 VSWR: 1.50:1 Max.
 Phase Balance: ± 5 Deg. Max.

MATERIAL: 		DATE: 02-04-2011		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
						SHEET: N/A	
DRAWING: Pailoon Luekhamhan		DATE: 02-04-2011		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2° DRAWING TITLE: 4-WAY POWER DIVIDER		PART NO. PLH4-22/SMA	
APPROVED: T. Nguyen		DATE: 02-04-2011		DEPENDENT REVISING: THE SPECIFICATIONS ARE DRAWN IN PROGRESSIVE AND SHALL NOT BE USED OR ISSUED WITHOUT OTHER PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) BENDABLE PROVISION		CAGE CODE: OD2L5	
						SIZE: N/A	
				REV: N/A		DWG NO. 85345	
				DO NOT SCALE THE DRAWING			

D
C
B
A

D
C
B
A

4 3 2 1