


SPECIFICATIONS

FREQUENCY RANGE (GHz):
DC - 8 GHz
IMPEDANCE (NOMINAL):
50 Ohms
TEMPERATURE RANGE:
-65°C TO +85°C
VSWR:
Hz - 1.0 1.05:1
1.0 - 5.0 1.15:1
5.0 - 8.0 1.25:1
PIM:
< -165 dBc

MFG CODE	DESCRIPTION
/M	DIN-FEMALE TO DIN-FEMALE ADAPTER

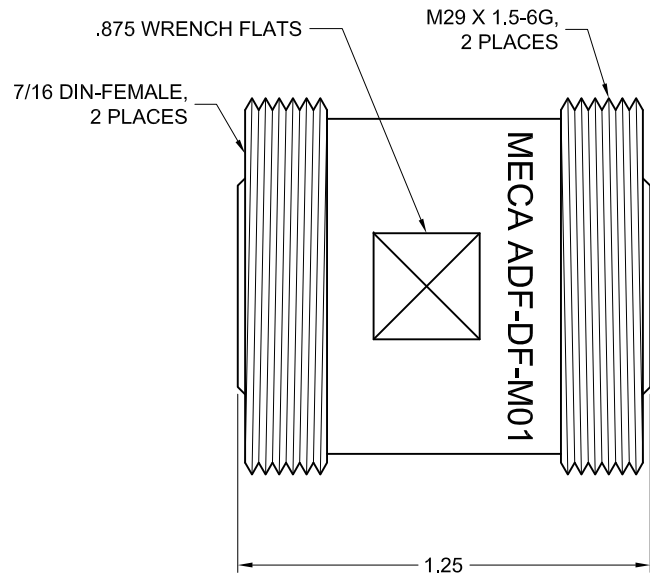

BODY: BRASS, ALBALOY PLATED
CENTER CONTACT: BeCu, SILVER PLATED

A		NEW	02/03/12	M.O.C.	RR	VARIOUS	MATERIAL: SEE ABOVE		TOP LEVEL ASSY: VARIOUS		 ELECTRONICS, INC. DENVILLE, NEW JERSEY e-MECA.com		
							FINISH: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES				
											TOLERANCES N/A		
							DRAWN: M.O.C.		DATE: 02/03/12	TIR: N/A			
LTR	PG	DESCRIPTION	DATE	DR	APP	NEXT LEVEL ASSY.	APPROVED: RR	DATE: 06/19/12	SCALE: NTS	SIZE A	CAGE CODE NO. 22424	DRAWING NO. ADF-DF-M01	REV A
									SHEET: 1 OF 1				