REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

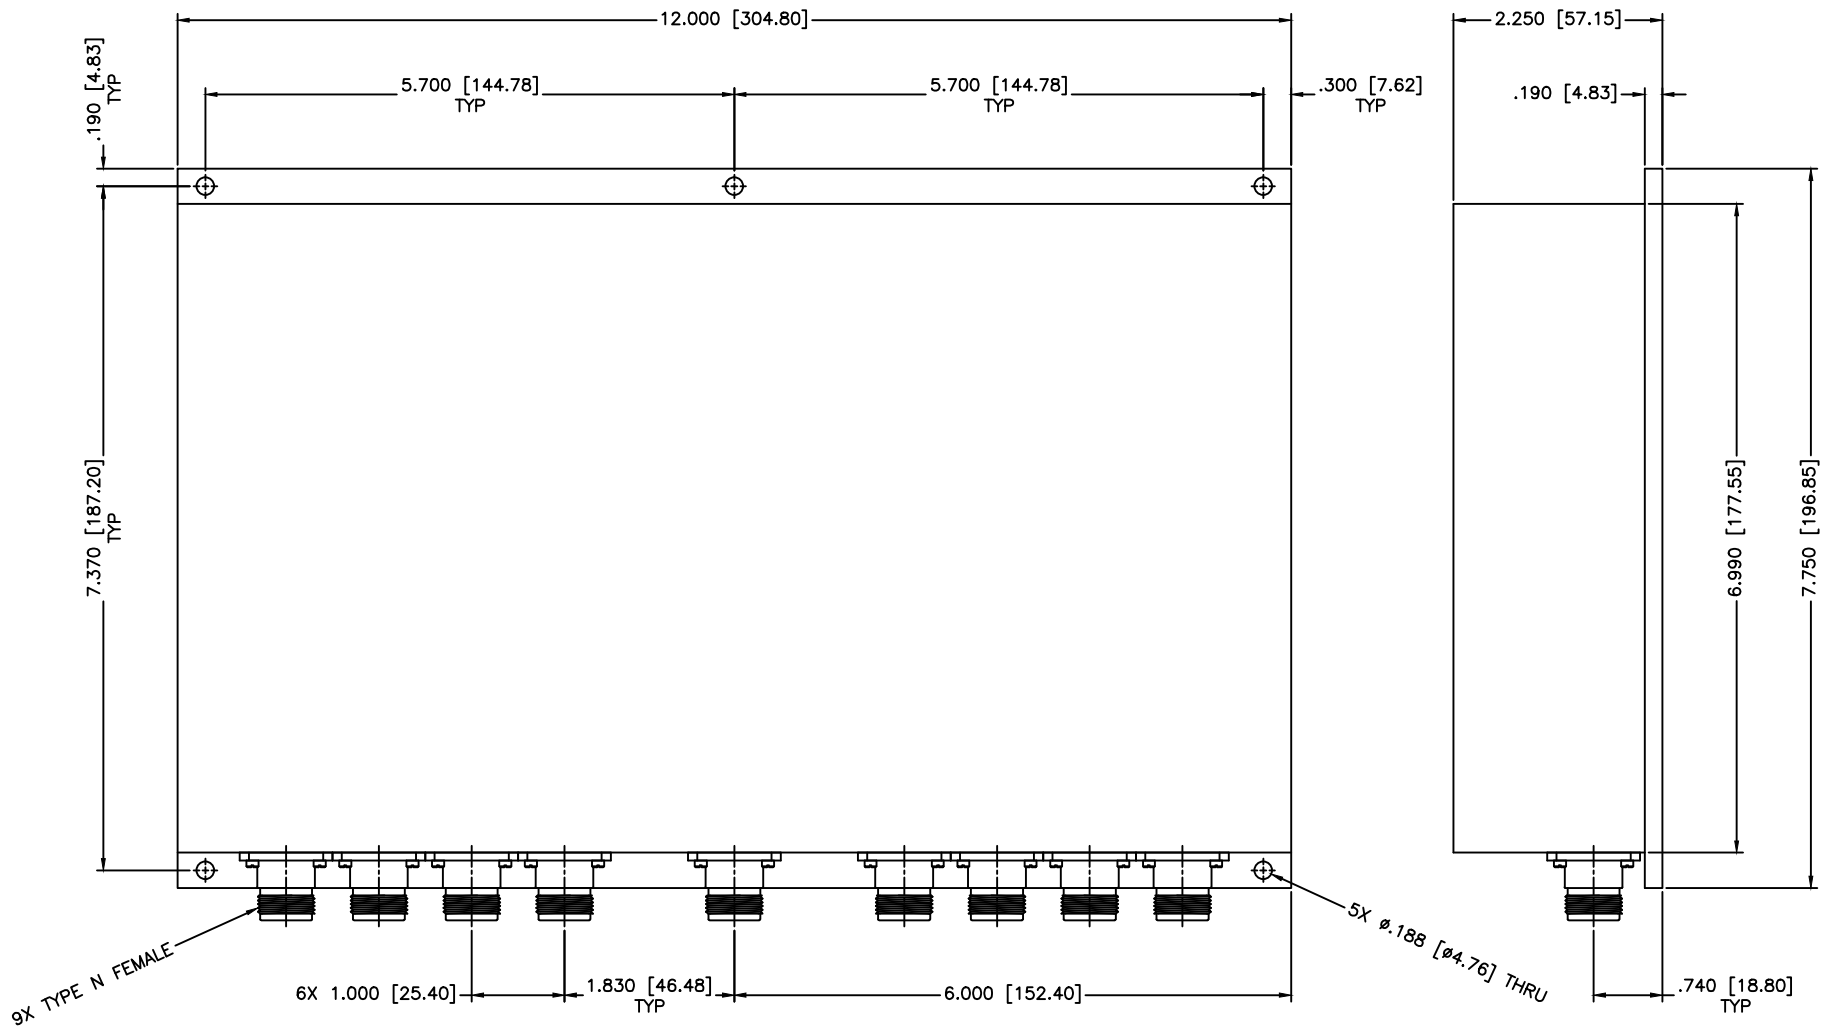

SPECIFICATIONS

Frequency Range: 20–150 MHz
VSWR: 1.40:1 Max.
Insertion loss: 0.75dB Max.
Isolation: 20dB Min.
Phase Balance: ±5 Deg. Max.
Amplitude Balance: ±0.3dB Max.
Power: 400 W CW

MATERIAL:

/MCLI/ MICROWAVE COMMUNICATIONS LABORATORIES INC.
7205 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 384-8324 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES:
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE: 8-WAY POWER DIVIDER

PART NO. PLH8-11/NF

DRAWING: Pailoon Luekhamhan DATE: 05-02-2006

APPROVED: T. Nguyen DATE: 05-02-2006

CAGE CODE: 0D2L5

SIZE: N/A REV: N/A

DO NOT SCALE THE DRAWING

DWG NO. 82541