
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

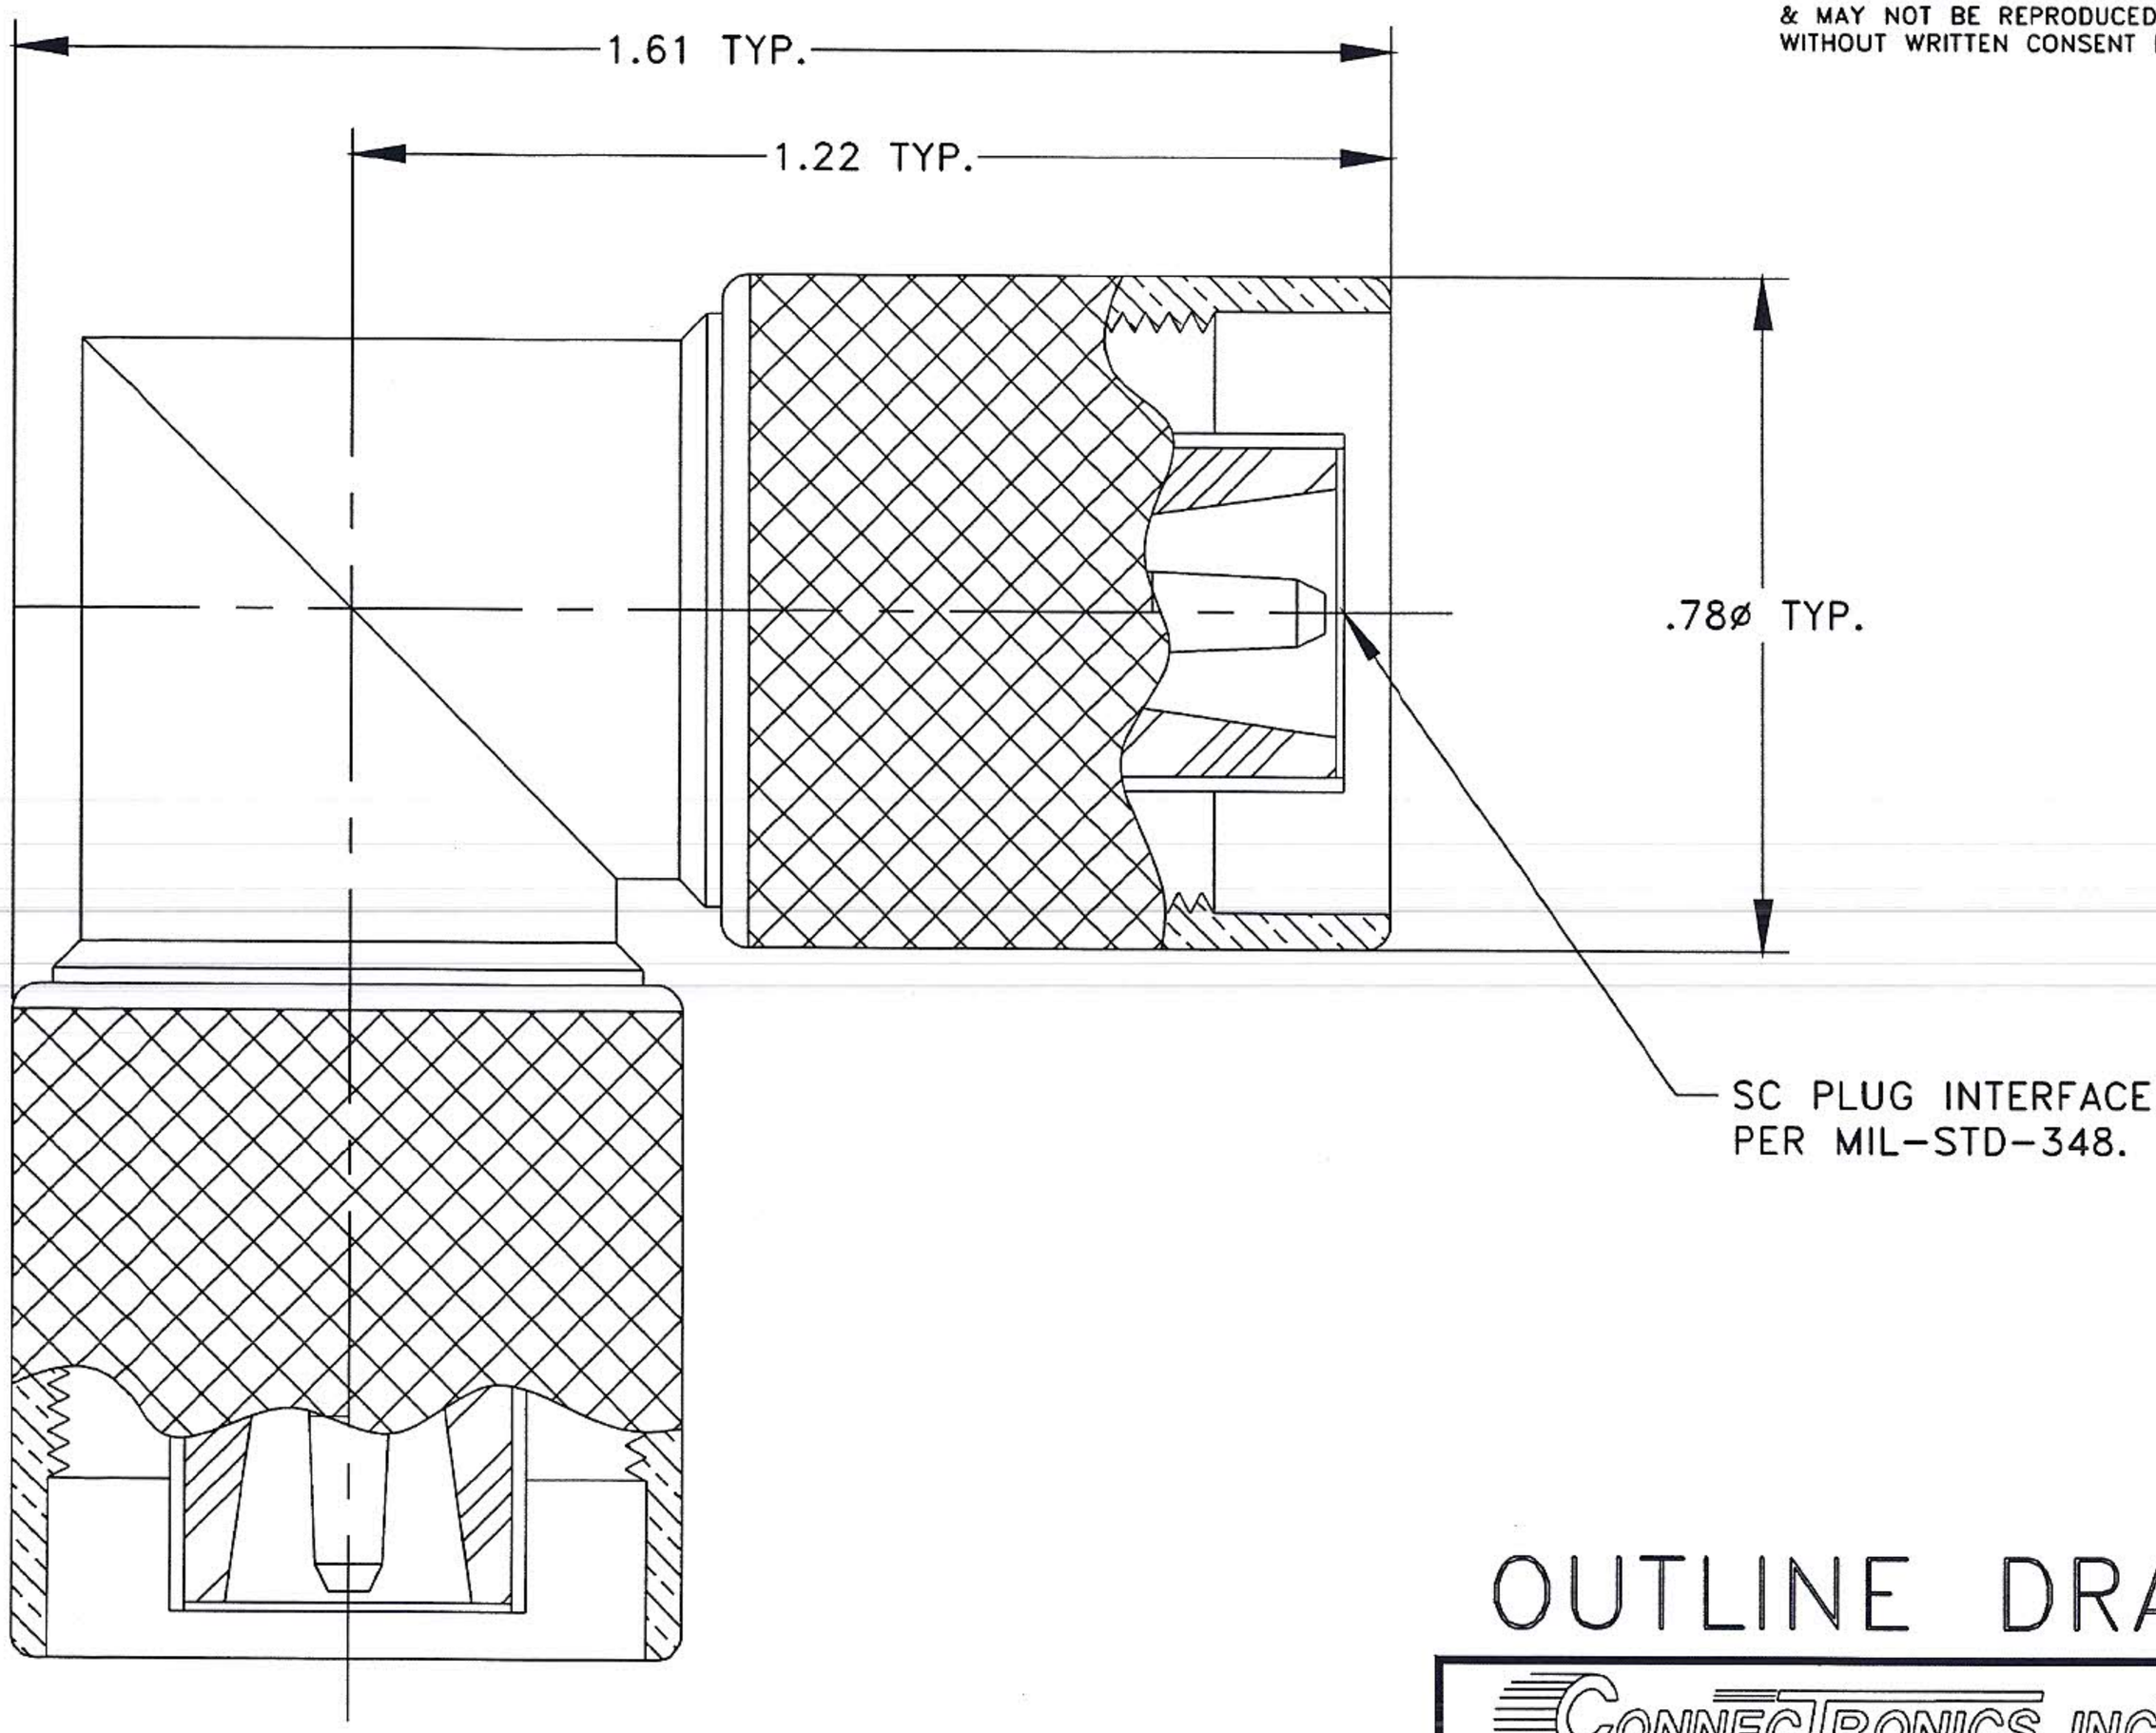

OUTLINE DRAWING

CONNECTRONICS, INC. EDINBURGH, INDIANA	FSCM 43608
DWG BY: RLC — DATE: 8/23/02	TOLERANCES UNLESS OTHERWISE SPECIFIED
APVD BY: — SCALE: ———	2 PL DEC ±.020
MATERIAL: ———	3 PL DEC ±.005
FINISH: ———	ANG. DIM ±1/2°
DESCRIPTION: SC ADAPTOR, RIGHT ANGLE, PLUG TO PLUG	DRAWING NO. 58-609 SHT 1 OF 2

REVISIONS

MATERIALS & FINISHES

BODY
- (X)BRASS,COMP.22,1/2HD PER QQ-B-626
- ( )303 STAINLESS STEEL PER QQ-S-764
- ( )BERYLLIUM COPPER PER QQ-C-530

PLATING
- ( )NICKEL
- (X)SILVER
- ( )GOLD
- ( )TRI-M3

INSULATOR
- (X)TEFLON PER L-P-403
- ( )BLACK NORYLL
- ( )REXOLITE
- ( )DELRIN
- ( )NYLON

SLEEVE
- (X)BRASS,COMP.22,1/2HD PER QQ-B-626
- ( )303 STAINLESS STEEL PER QQ-S-764

PLATING
- ( )NICKEL
- (X)SILVER
- ( )GOLD
- ( )TRI-M3

GASKETS/O-RINGS
- ( )BUNA N-MIL-STD-417 CLASS SB410 (40 DURO)
- (X)SILICONE-ZZ-R-765 CLASS 2A GRADE 60 RED (60 DURO)
- ( )ASTM D 2000-SAEJ200 3CH71SA25DISE16B36FIS (40 DURO)
- ( )LS-53-AMS 3325 OR AMS 3326 (40 DURO)
- ( )MIL-R-83248 CLASS 1 (75 DURO)
- ( )SILICONE-ZZ-R-765 CLASS 1B, GRADE 50 RED

OUTER CONTACT (F)
- ( )BRASS,COMP.22,1/2HD PER QQ-B-626
- (X)BERYLLIUM COPPER PER QQ-C-530
- ( )PHOSPOR BRONZE

PLATING
- ( )NICKEL
- (X)SILVER
- ( )GOLD
- ( )TRI-M3

CONTACT
- (X)BRASS,COMP.22,1/2HD PER QQ-B-626
- ( )BERYLLIUM COPPER PER QQ-C-530

PLATING
- ( )NICKEL
- ( )SILVER
- (X)GOLD
- ( )TRI-M3

SNAP RING
- ( )BRASS,COMP.22,1/2HD PER QQ-B-626
- ( )BERYLLIUM COPPER PER QQ-C-530
- (X)PHOSPHOR BRONZE

SPECIFICATIONS

IMPEDANCE
- (X)50 OHMS
- ( )75 OHMS
- ( )NON-CONSTANT

FREQUENCY RANGE: 0 TO 11 GHz

VOLTAGE RATING: 1000V RMS

DIELECTRIC WITHSTANDING VOLTAGE: 3000 VOLTS RMS

INSULATION RESISTANCE: 5000 MEGOHMS MIN.

TEMP. RANGE: -65°C TO +165°C

MISCELLANEOUS

REVISIONS

CONNECTRONICS, INC.
EDINBURGH, INDIANA

DWG BY: RLC	DATE: 8/23/02
APVD BY:	SCALE: ———
MATERIAL: ———	
FINISH: ———	

DESCRIPTION: SC
ADAPTOR, RIGHT ANGLE, PLUG TO PLUG

FSCM 43608

TOLERANCES
UNLESS OTHERWISE SPECIFIED
- 2 PL DEC ± .020
- 3 PL DEC ± .005
- ANG. DIM ±1/2°

DRAWING NO.
44-442-1
SHT 2 OF 2