

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/02/10	D.N.



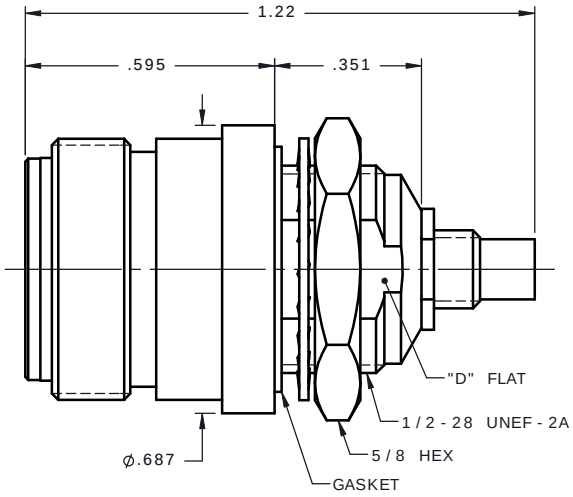

NOTES:

MATERIALS:

1. "N" INTERFACE CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
2. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
4. GASKET = SILICONE RUBBER 45-55 DUROMETER DOW CORNING SILASTIC 250.
5. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 TO .0002 THICK OVER .00005 TO .0001 THICK COPPER PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON DECIMAL / ANGLE	DWN: D.N. DATE 09/02/10 CHKD: M.J. DATE 09/02/10 APVD: J.M. DATE 09/02/10	Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.
		STRAIGHT TYPE "N' JACK TO SMC JACK BULKHEAD MOUNT ADAPTER
REFERENCE: ORIGINATED: D.N. DATE: 09/02/10	MATERIALS & FINISHES: SEE NOTES	SIZE A · FSCM NO. 19505 · DWG NO. 5610-7501-000 · REV A SCALE 3:1 · THIRD ANGLE PROJECTION · SHEET 1 OF 1

5610-7501-000