
DASH #	BODY MATERIAL	BODY FINISH	CONTACT FINISH
-1	STNLS. STEEL	PASSIVATED	GOLD

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

NOTES:

A) ELECTRICAL SPECS;
1) IMPEDANCE/50 OHMS.
2) FREQUENCY RANGE/0-150GHZ.
3) VOLTAGE RATING/335V RMS.
4) V.S.W.R./DC TO 12.4GHZ: 1.06+.005 F(GHZ).
/12.4 TO 18GHZ: .83+.023 F(GHZ).
5) DIELECTRIC WITHSTANDING VOLTAGE/1000V RMS.
6) INSULATION RESISTANCE/50000 MEGOHMS MIN.

B) TEMPERATURE RANGE/-65° TO +165°C

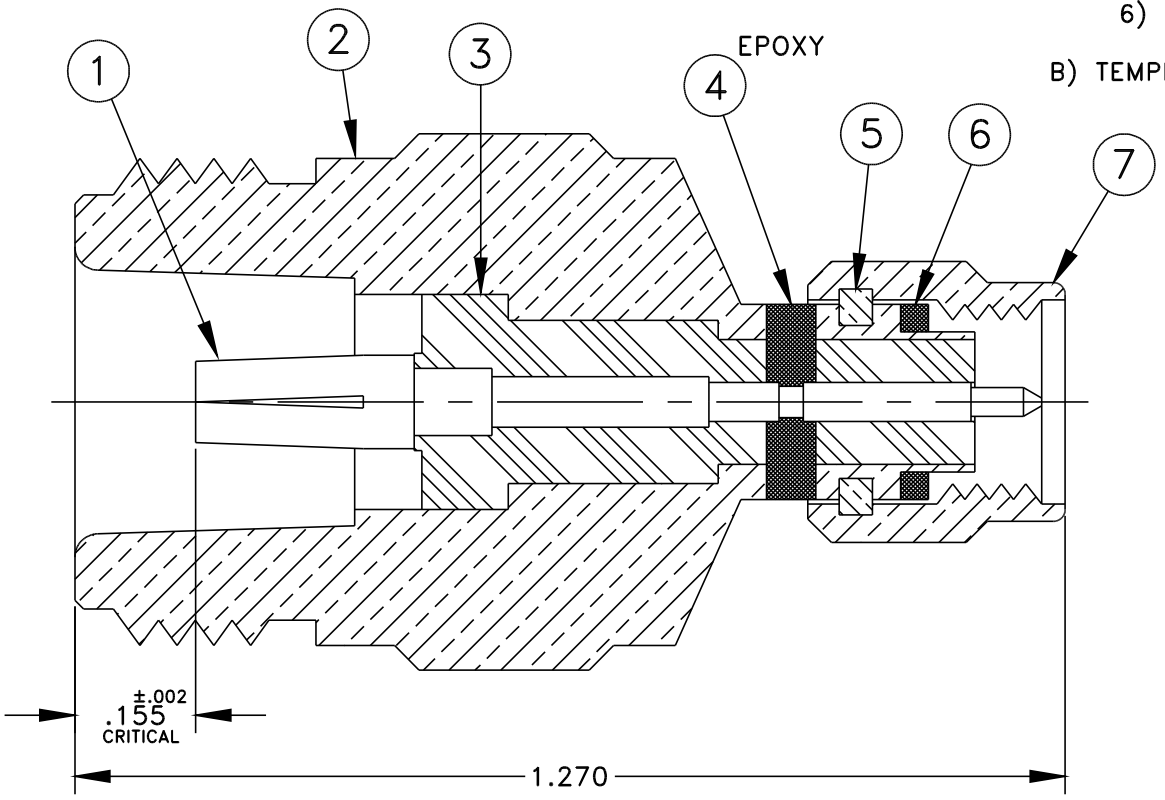

REVISIONS

-A-
ECN1073
DRAWN ON CAD
ADDED ITEM NUMBERS
KLR
08/30/96

CONNECTRONICS, INC.
EDINBURGH, INDIANA

FSCM 43608

DWG BY: KLR	DATE: 8/29/96
APVD BY:	SCALE:
MATERIAL:	
FINISH:	

TOLERANCES
UNLESS OTHERWISE SPECIFIED
2 PL DEC ± .020
3 PL DEC ± .005
ANG. DIM ±1/2°

DESCRIPTION: BETWEEN SERIES
ADAPTOR, 'N' JACK
TO 'SMA' PLUG, PRECISION

DRAWING NO.
70-201
SHT 1 OF 1