
70-147

SH'T · 1 OF 1

DASH #	BODY FINISH	BNC CONTACT FINISH	PHONO PLUG CONTACT FINISH
-1	NICKEL	GOLD	NICKEL

NOTES:
A.) OPERATING VOLTAGE — 500 V RMS
B.) BNC IMPEDANCE — 50 OHMS
C.) OPERATING TEMPERATURE — + 216° F MAX.

ASSEMBLY NOTE: CLOSE RCA TINES TO .319/.323 INSIDE DIAMETER

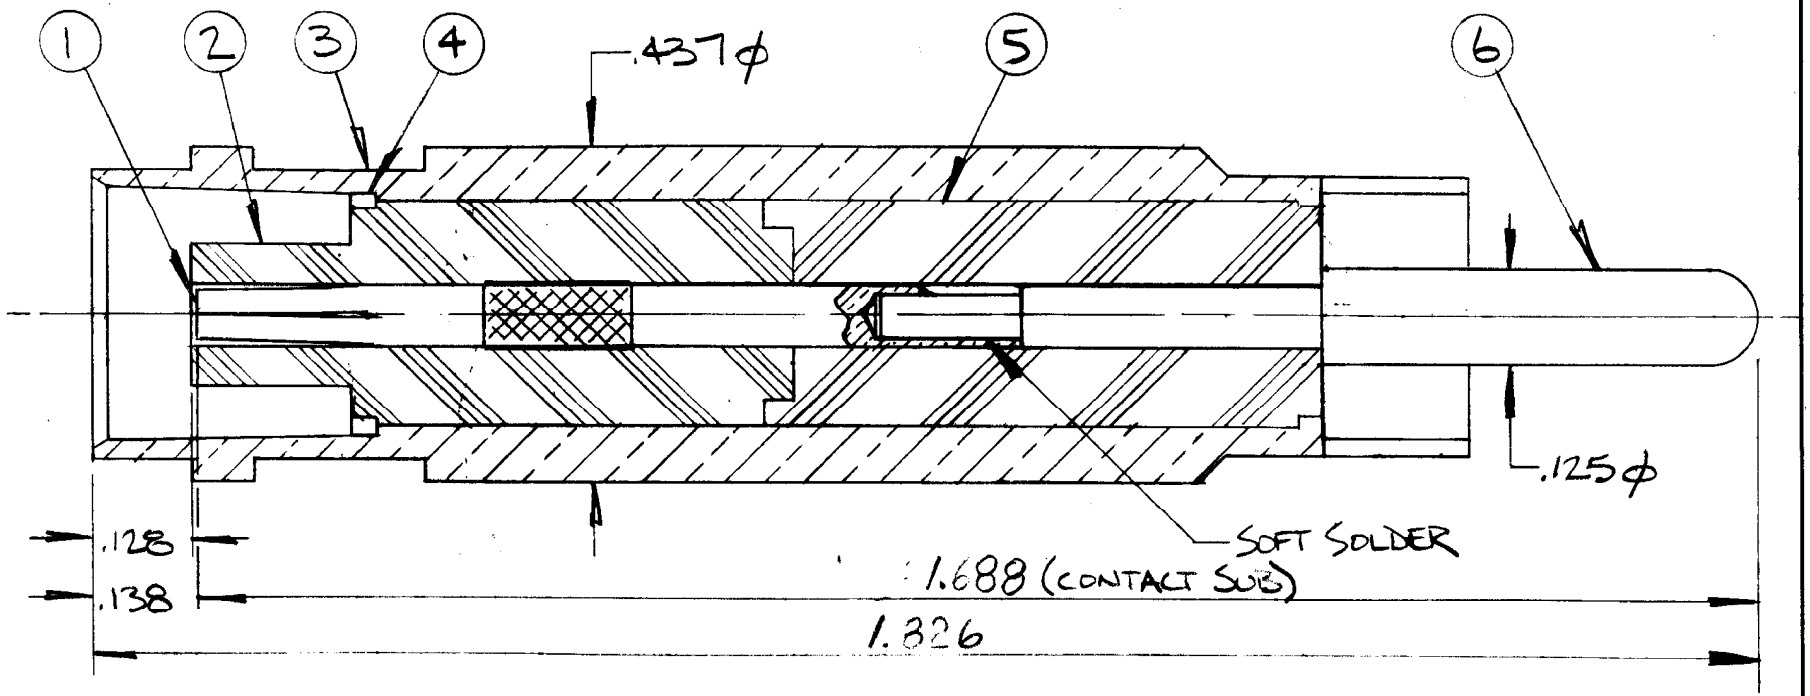

REVISIONS
ECN 934 -A-
O.A.L. WAS 1.95
CONTACT SUB WAS 1.812
ADDED CLOSURE NOTE
KLR 3/22/96

CONNECTRONICS, INC.
HURRICANE ROAD
FRANKLIN, INDIANA 46131

DWG BY: JOHN B	DATE: 8/30/90	TOLERANCES UNLESS OTHERWISE SPECIFIED
APP'D BY:	SCALE: —	2 PL DEC ± .020
MATERIAL: —		3 PL DEC ± .005
FINISH: —		ANG. DIM ± ½°
DESCRIPTION: BETWEEN SERIES ADAPTOR, BNC JACK TO PHONO PLUG		DRAWING NO. 70-147 SH'T 1 OF 1