
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

ELECTRICAL:
- IMPEDANCE / 50 OHMS
- FREQUENCY RANGE / 0-4 GHz
- VOLTAGE RATING / 250 V RMS
- INSULATION RESISTANCE / 1000 MEGOHMS MIN.

TEMPERATURE RANGE:
- -65°C TO +165°C

MATERIALS:
- BODY COMPONENTS / BRASS,COMP.22,1/2HD, QQ-B-626.
- CONTACTS / BERYLLIUM COPPER PER QQ-C-530.
- INSULATORS / TEFLON PER L-P-403

FINISH:
- BODY COMPONENTS / NICKEL PLATED.
- CONTACTS / GOLD PLATED

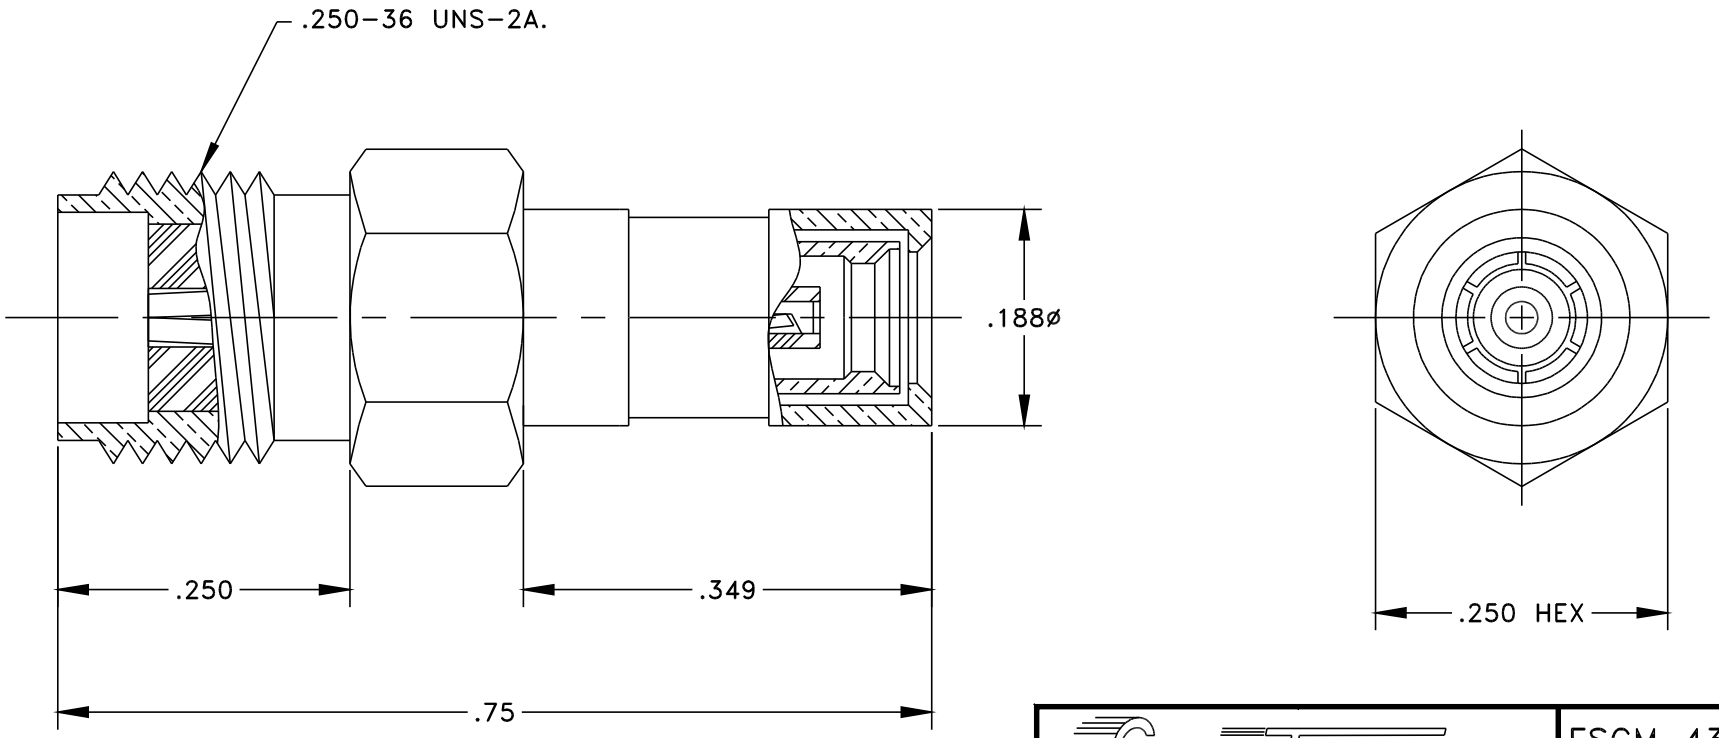


# OUTLINE DRAWING

| REVISIONS | -A- |
|---|---|
| REV LEVEL | |

CONNECTRONICS, INC.
EDINBURGH, INDIANA

FSCM 43608

| | |
|---|---|
| DWG BY: JOHN B. | DATE: 9/11/95 |
| APVD BY: | SCALE: ——— |
| MATERIAL: ——— | |
| FINISH: ——— | |

DESCRIPTION: BETWEEN SERIES
ADAPTOR, 'SMA JACK'
TO 'SSMB' PLUG

TOLERANCES
UNLESS OTHERWISE SPECIFIED

| | |
|---|---|
| 2 PL DEC | ± .020 |
| 3 PL DEC | ± .005 |
| ANG. DIM | ±1/2° |

DRAWING NO.
70-256
SHT 1 OF 1