
SPECIFICATIONS

FREQUENCY RANGE (GHz):	DC - 18 GHz
IMPEDANCE (NOMINAL):	50 Ohms
TEMPERATURE RANGE:	-65°C TO +85°C
VSWR:	Hz - 7.0 1.10:1
	7.0 - 12.4 1.15:1
	12.4 - 18.0 1.60:1

MFG CODE	DESCRIPTION
/M	N-MALE TO SMA-MALE ADAPTER

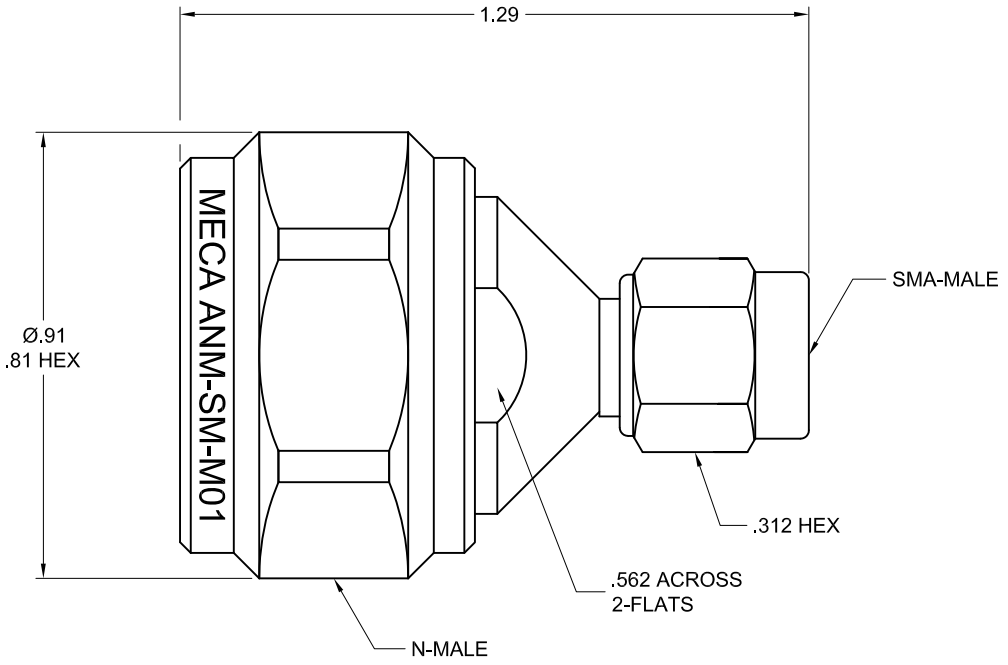

BODY: BRASS, NICKEL PLATED
CENTER CONTACT: BRASS, GOLD PLATED

LTR	PG	DESCRIPTION	DATE	DR	APP	NEXT LEVEL ASSY.
A		NEW	02/03/12	M.OC.	RR	VARIOUS

MATERIAL: SEE ABOVE		TOP LEVEL ASSY: VARIOUS	ELECTRONICS, INC. DENVILLE, NEW JERSEY e-MECA.com
FINISH: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES TOLERANCES N/A	TITLE ADAPTER, N-MALE TO SMA-MALE
DRAWN: M.OC.	DATE: 02/03/12	TIR: N/A	
APPROVED: RR	DATE: 06/19/12	SCALE: NTS SHEET: 1 OF 1	SIZE A

CAGE CODE NO.	DRAWING NO.	REV
22424	ANM-SM-M01	A