
| REVISION | | | | |
|---|---|---|---|---|
| ASS. REV. | CON. REV. | DESCRIPTON | DATE | APPROVED |
| N/A | – | INITIAL RELEASE | 2015/01/07 | |

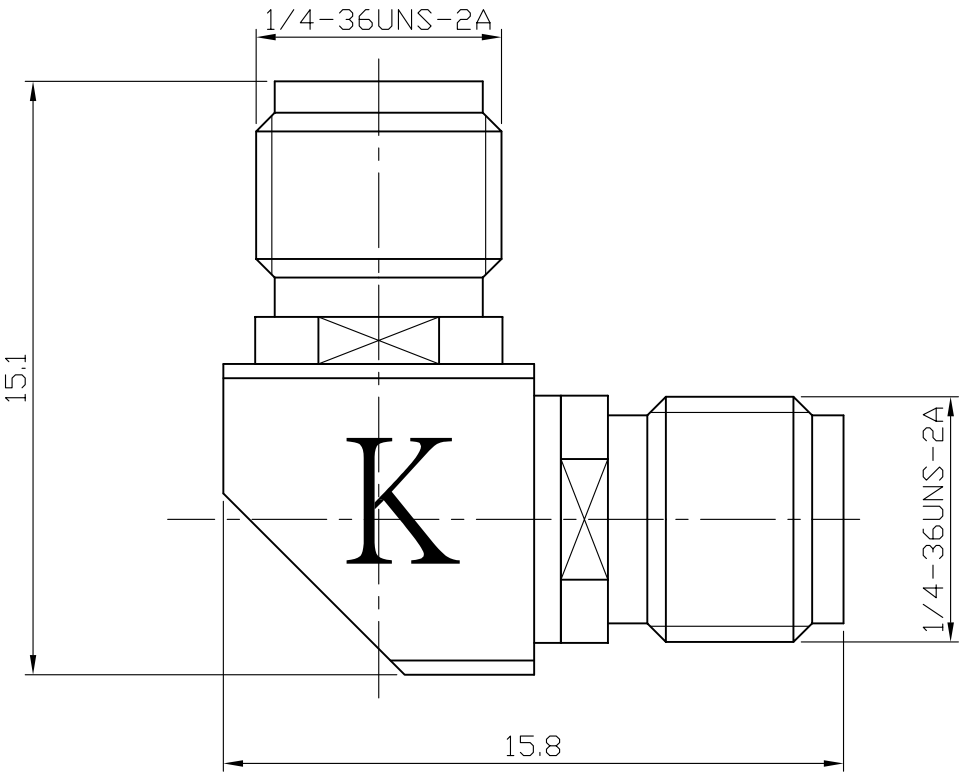


VSWR : 1.25 UP TO 40GHz

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. STAINLESS STEEL.
2. BERYLLIUM COPPER.
3. GOLD PL. 4 MIN. OVER NICKEL-PHOSPHORUS ALLOY PL. 80 MIN. OVER COPPER PL. 20 MIN.

| NO. | DESCRIPTION | MATERIAL | FINISH | QTY | PART NO. |
|---|---|---|---|---|---|
| 6 | FERRULE | NOTE 1 | PASSIVATED | 1 | ALS-K3K8-8 |
| 5 | FERRULE | NOTE 1 | PASSIVATED | 1 | ALS-K3K8-7 |
| 4 | CONTACT PIN | NOTE 2 | NOTE 3 | 1 | ALS-K8K8-4/NM |
| 3 | INSULATOR | PPO | | 2 | K3300-0085-3 |
| 2 | BODY | NOTE 1 | PASSIVATED | 2 | ALS-K3K8-4 |
| 1 | BODY | NOTE 1 | PASSIVATED | 1 | ALS-K3K8-3 |

DIMENSION ARE MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES ( UNIT: MM )
0.5~ 5= ±0.05
5 ~10 = ±0.07
10~20 = ±0.10
20~30 = ±0.15
30~ = ±0.20

| SCALE | ASSEMBLY REV. | CONNECTOR REV. | UNIT |
|---|---|---|---|
| 5 / 1 | N/A | – | MM |

APPROVED DATE
CHECKED DATE
DRAWING DATE

**JYE BAO CO., LTD.**
TAIPEI TAIWAN

TITLE: K JACK TO K JACK R/A
DRAWING NO.: ALS-K8K8