

MALE-MALE HERMETIC ADAPTER

BULKHEAD PANEL SEAL


R114.753.000

Series : **SMB**

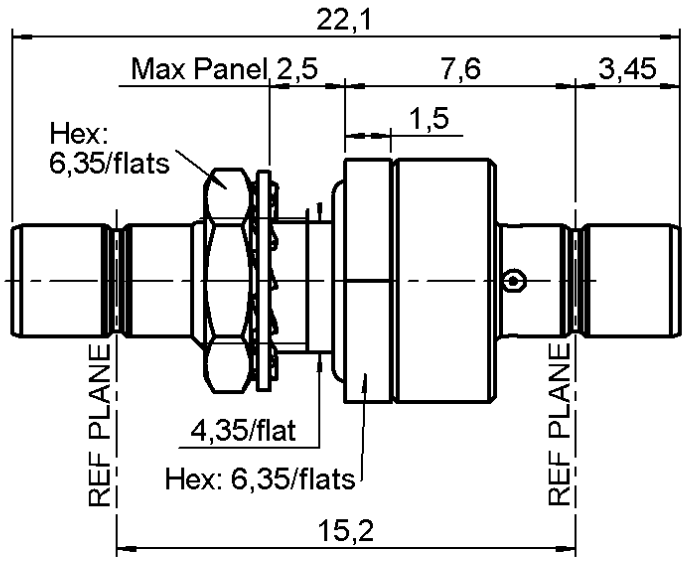




PANEL CUT OUT



	mm	
	Maxi	mini
A	5.05	4.9
B	4.65	4.5

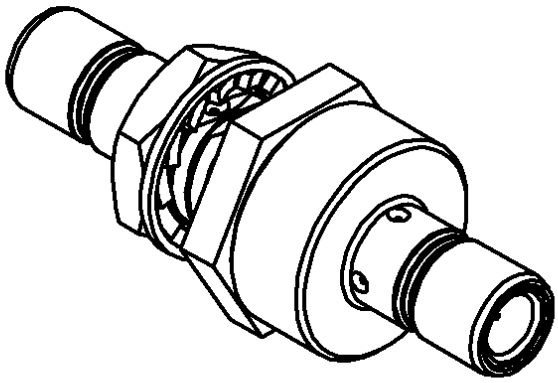

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	**BRASS**	**GOLD 0.2 OVER NICKEL 2**
CENTER CONTACT	**BRASS**	**GOLD 1.3 OVER NICKEL 2**
OUTER CONTACT	-	-
INSULATOR	**PTFE**	
GASKET	**FLUOROCARBON RUBBER**	
OTHERS PARTS	**BRASS**	**GOLD 0.2 OVER NICKEL 2**
-	-	-
-	-	-

Issue : 0210 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

MALE-MALE HERMETIC ADAPTER

BULKHEAD PANEL SEAL

R114.753.000

Series : **SMB**

PACKAGING

Standard	Unit	Other
100	**'W' option**	**Contact us**

SPECIFICATION

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-4**	GHz
VSWR	**1.08** +	**0.020**	x F(GHz) Maxi
Insertion loss		**0.25**	√F(GHz) dB Maxi
RF leakage	- (	**57**	- F(GHz)) dB Maxi
Voltage rating		**500**	Veff Maxi
Dielectric withstanding voltage		**1000**	Veff mini
Insulation resistance		**1000**	MΩ mini

ENVIRONMENTAL

Operating temperature	**-65/+165**	° C
Hermetic seal	**10-6**	Atm.cm3/s
Panel leakage	**IP54**	

OTHERS CHARACTERISTICS

Assembly instruction **NA**

Others :
-

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	**10**	N mini
Axial force – Opposite end	**10**	N mini
Torque	**NA**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**60**	N.cm
Mating life	**500**	Cycles mini
Weight	**0.000**	g

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®