
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO. **RSA-3400**

REV	DESCRIPTION	DWN	DATE	APPROVED
–	ENGINEERING RELEASE	CZS	10/01/02	JOMc

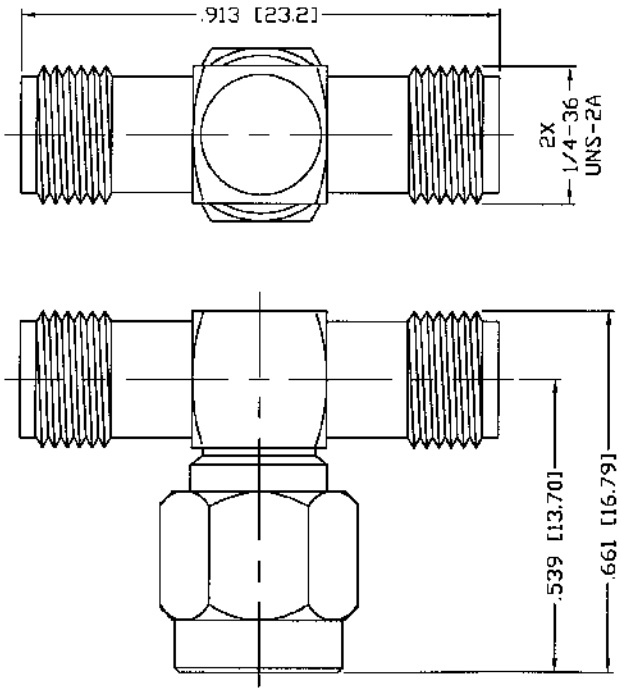

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
WORKING VOLTAGE: 335 V rms Max. @ Sea Level
INSULATION RESISTANCE: 5k MOhms min.
TEMPERATURE RANGE: –55°C TO 85°C

#	DESCRIPTION	QTY	MATERIAL	FINISH
1	HOUSING	1	BRASS	NICKEL, 100µ"
2	BODY (PLUG)	1	BRASS	NICKEL, 100µ"
3	BODY (JACK)	1	BRASS	NICKEL, 100µ"
4	CONTACT	1	BeCu	GOLD, 3µ"
5	PIN	1	BRASS	GOLD, 3µ"
6	INSULATOR	1	PTFE	---
7	INSULATOR	2	PTFE	---
8	RETAINING RING	1	BeCu	NICKEL, 100µ"
9	GASKET	1	RUBBER	---
10	END CAP	1	BRASS	NICKEL, 100µ"
11				
12				
13				
14				

000712

APPROVALS	DATE
DRAWN C. ZUNIGA	10/01/02
CHECKED	10-1-02
ORJ DRAWN C. ZUNIGA	10/01/02

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX.
3. CHAMFER 1ST & LAST THREADS 45°
4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS	DIAMETER
.XXX±.003 [.08]	.XXX±.001 [.03]
.XX±.005 [.13]	.XX±.003 [.08]

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD
SAN DIEGO,CA 92126
(858) 549-6340
(858) 549-6345 FAX

SMA PLUG TO DOUBLE JACK

T ADAPTER

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RSA-3400	–

SCALE: NTS | CAD FILE OUTLINE | SHEET 1 OF 1