

DESCRIPTION

PMI MODEL NO. EWDM-6G18G-65-70MV-2 IS A CW IMMUNE EW DETECTOR MODULE OPERATING OVER THE 6.0 TO 18.0 GHz FREQUENCY RANGE. THIS MODEL FEATURES AN INTERNAL SWITCH USED TO SWITCH BETWEEN THE "BIT IN" AND "RF IN" WITH INPUT BLANKING ON BOTH PORTS. IN ADDITION, TWO AMPLIFIED RF OUTPUTS ARE PROVIDED A 7 dB GAIN CHANNEL AND A 33 dB GAIN CHANNEL. THE VIDEO OUTPUT IS DESIGNED TO DRIVE A 150 ft. CABLE, WHILE MAINTAINING HIGH SPEED, AND EXCELLENT ACCURACY.

SPECIFICATIONS

- Input Frequency: 6-18 GHz
- Input VSWR: 2.2:1, Max., Impedance = 50 Ohm
- Noise Figure: 6 dB, Max.
- Input Power: (1) 1 W CW, Max.
(2) 100 W Peak @ PW = 1 us & Duty Cycle = 1%, Max.
- Control & DC Supply Connector: D-type Female 9 pin
- RF Connectors & Video Output (5 Places): SMA (F)
- TTL Control Logic Interface: See Logic Table
- Finish: Gray epoxy paint, bottom surface free of paint

SP3T SWITCH SPECIFICATIONS:

- Switch Mode: See Logic Table
- Isolation: 60 dB, Min., among all ports
- Switching Speed: 100 ns, Max.

OUTPUT TO 8-WAY POWER COMBINER SPECIFICATIONS:

- Linear Gain: +33 dB, Min; 40dB Max.
- Frequency Flatness: ±2.5 dB, Max.
- 1 dB Compression Point: +10 dBm, Min.
- Noise Figure: 6 dB, Max.
- Second Harmonic: -12 dBc, Min.
- Third Harmonic: -15 dBc, Min.
- I/O VSWR: 2.2:1, Max., Impedance = 50 Ohm

OUTPUT TO SWITCH MATRIX SPECIFICATIONS:

- Linear Gain: +7 dB, Min; 12dB Max.
- Frequency Flatness: ±1.5 dB, Max.
- 1 dB Compression Point: +10 dBm, Min.
- Saturated Power: +10 dBm, Max.
- Second Harmonic: -12 dBc, Min.
- Third Harmonic: -15 dBc, Min.
- I/O VSWR: 2.2:1, Max., Impedance = 50 Ohm

DC POWER SPECIFICATIONS:

- DC Supply Voltage : ±15 V ±5%
- Ripple From DC to 10 MHz : 100 mV, Max.
- Current: 1.0 A. For +15 VDC, Max.
0.5 A. For -15 VDC, Max.

ENVIROMENTAL SPECIFICATIONS

- Operating Temperature: 0 °C +85 °C
- Stabilization Bake: 24 Hours @ +85 °C
- Thermal Shock: High temperature 85 °C, low temperature 0 °C
5 cycles, dwell time 2 hours
- Random Vibration: 20 Hz to 2000 Hz, random at 16.8 Grms, in all three axis for 15 minutes, Min.
- Burn In: +85 °C for 48 hours with DC power on

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	12/7/18	JM
	1	SPEC. UPDATES	7-25-19	JM




LOG VIDEO OUTPUT SPECIFICATIONS:

- TSS -71dBm, Min
- Dynamic Range -65 to +0 dBm
- Log Slope, Fixed 70 ±3mV/dB
- Log Linearity Deviation ±1.00dB, Max. @ 12GHz
(Deviation From Straight Line @ 12GHz & 25 °C)
- Log Accuracy ± 2.0 dB, Max.
(Deviation From Straight Line thru average slope @ 25 °C & Frequency Range)
- Absolute Log Accuracy ± 2.25db, Max
(Deviation From Straight Line thru average slope over Frequency Range & 0 °C to +85 °C)
- DC offset @ RF input is terminated & DC power is on. 0 ±70mV
- Rise Time, (10% to 90%) 25ns (typ.); 28ns, Max
- Falling Time, (90% to 10%) 300ns, Max
- Settling Time, Max. 50 ns to within ±70 mV of final value.
- Recovery Time, Max. @-10dBm & Pulse Width <50 us. 500 ns Max.
From 90% Falling edge to ±1.0dB of Baseline
- Video Frequency Flatness ±1. 75dB Max. At any Constant
Input Power From -65 dBm to 0 dBm, as
frequency is varied from 6-18 GHz
- CW immunity A. CW immune power TSS to -40dBm baseline shift: 200mv,
Max
Pulse frequency and CW frequency difference of 500 MHz min.
(Combined signals are inputted to DLVA)
B. At Pulse Power -30dBm When CW Power= -50dBm, Pulse
Amplitude No Loss.
When CW Power = -40 dBm, Pulse Amplitude Loss 2dB Max.
- CW Immune Time @ CW = -40dBm ≤ 3 ms
- CW Immune Time @ CW = -40dBm ≤ 50 us
- Pulse Response, Input signal 100 ns to 300 us
- Output Load Impedance 75±1 Ohm
- Output Video driver capability Driving 150 ft RG11 into 75 ohm load.
- Pulse Density Capability 10% Duty Cycle 100ns; 70% Duty Cycle 300us at Peak Power
-10dBm With 1dB Variable For Pulse Amplitude and Baseline.
Pseudo AC COUPLED MODE
- COUPLED MODE
- Noise level (Vp-p) 160mv, Typ.
- Droop of the output video pulse at Power > -65dBm for Pulse Width 300us. 70mv (1db), Max
- Propagation Delay, Max. 50 ns (Excluding Cable) @Switch is on "ON" position
from 50% input RF TO 10% output video.

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE			
DRAWN		J.M		PRODUCT FEATURE			
CHECKED		12/7/18		EWDM-6G18G-65-70MV-2			
ISSUED				SIZE	FSCM NO.	DWG NO.	REV.
				A	05XQ0	PRELIMINARY	1
				SCALE	N:S	SHEET	1 OF 3

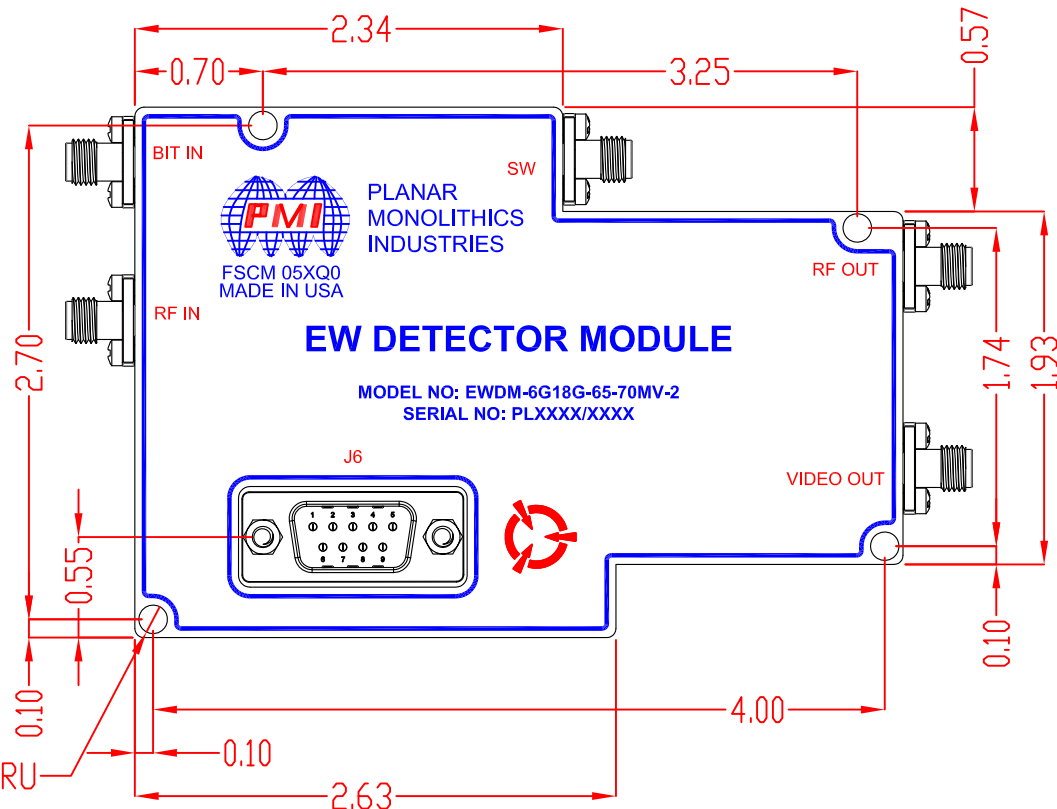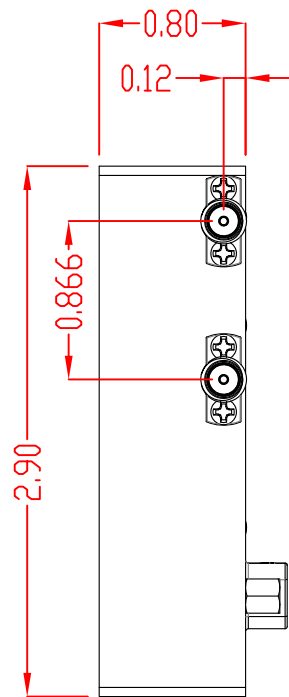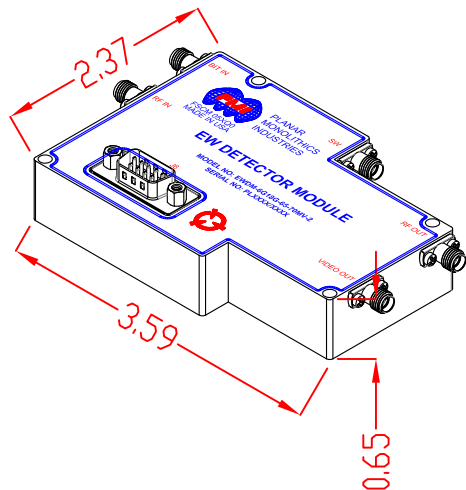

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	12/7/18	JM
	1	SPEC UPDATES	7-25-19	JM

D-SUB CONNECTOR PINS

PIN NO.	FUNCTION
1	+15VDC
2	GND
3	NC
4	SWITCH CTL TTL 1
5	SWITCH CTL TTL 2
6	+15VDC
7	-15VDC
8	-15VDC
9	GND

SWITCH CONTROL TTL LOGIC TABLE

COMMAND MODES	PIN 4	PIN 5
RF Input Mode	TTL LOW	TTL LOW
BIT Input Mode	TTL HIGH	TTL LOW
RF Input Chop Mode	TTL LOW	TTL HIGH
BIT Input Chop Mode	TTL HIGH	TTL HIGH

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
XXX ±0.020
X.XXX ±0.010

PMI CONFIDENTIAL AND PROPRIETARY


PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN		J.M.		PRODUCT FEATURE	
CHECKED		12/7/18		EWDM-6G18G-65-70MV-2	
ISSUED				PRELIMINARY	
SIZE	FSCM NO.	DWG NO.	REV.		
A	05XQ0		1		
SCALE	N:S			SHEET	2 OF 3

FUNCTIONAL BLOCK DIAGRAM

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	12/7/18	JM
	1	SPEC UPDATES	7-25-19	JM

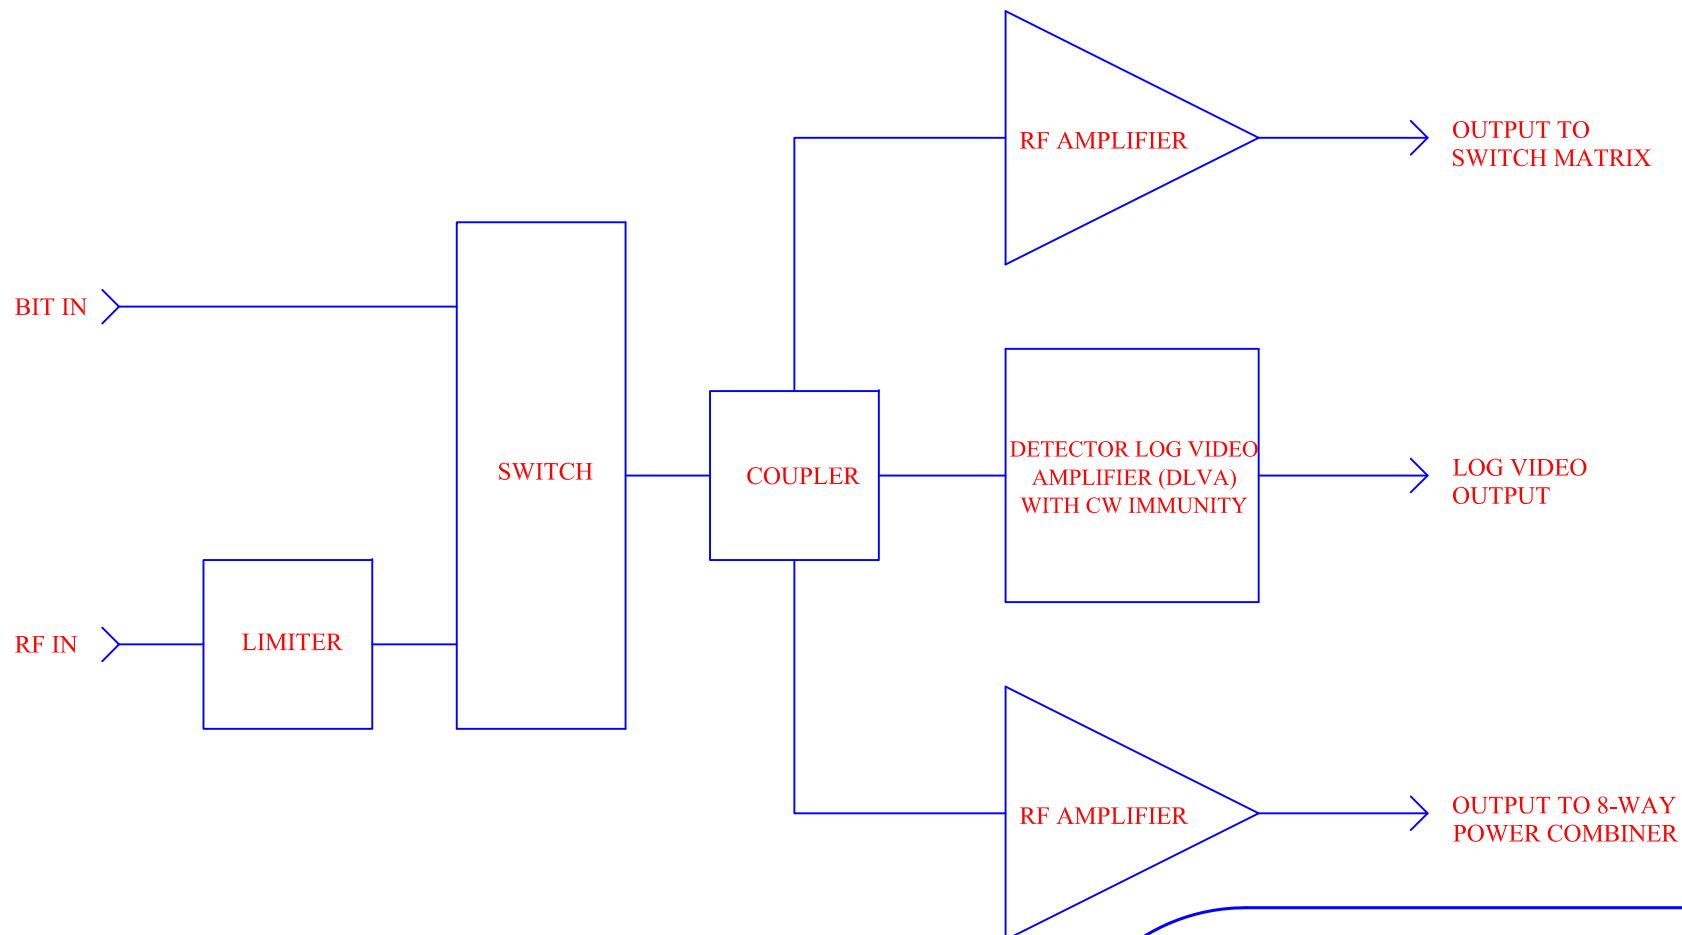

PLANAR MONOLITHICS INDUSTRIES, INC.
 7311-F GROVE ROAD
 FREDERICK, MARYLAND 21704 USA
 TEL: 301-662-5019 FAX: 301-662-1731
 WEBSITE: www.pmi-rf.com
 E-MAIL: sales@pmi-rf.com
 ISO 9001 CERTIFIED



ALL DIMENSIONS ARE IN INCHES
 TOLERANCES:
 XXX ±0.020
 XXXX ±0.010

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
 NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

		TITLE PRODUCT FEATURE EWD-6G18G-65-70MV-2			
APPROVALS	DATE				
DRAWN JM	12/7/18				
CHECKED		SIZE A	FSCM NO. 05XQ0	DWG NO. PRELIMINARY	REV. 1
ISSUED		SCALE N:S		SHEET 3 OF 3	