

REVISIONS				DATE	APPROVED
2	REV	DESCRIPTION		2/7/03	
-		ORIGINAL RELEASE			

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

Frequency Range:
1.0 to 4.0 GHz
Gain:
15dB Typ.
Gain Flatness:
+/-1.0dB Max.
Noise Figure:
4.5dB Typ.
OP1dB:
13dBm Min.
VSWR Input/Output:
2.0:1 Max.
DC Voltage Supply:
+12 to +15V/DC
DC Current Draw:
65mA Max.

Features:

Internal Voltage Regulation
Unconditional Stability
Standard Operating Temperature -20 to +70 Deg. C

Available Options:


Various Package types
Various Connector types
Temperature Compensation
Hermetic Sealing
Gain and Phase Matching
MIL-STD-883 Screening Available

Environmental Ratings:


Temperature:
-20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)
-55 to +125 Deg. C (Storage)
Humidity:
MIL-STD-202F, METHOD 103B COND B.
Shock:
MIL-STD-202F, METHOD 213B COND B.
Altitude:
MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

PE2 HOUSING WITH CARRIER

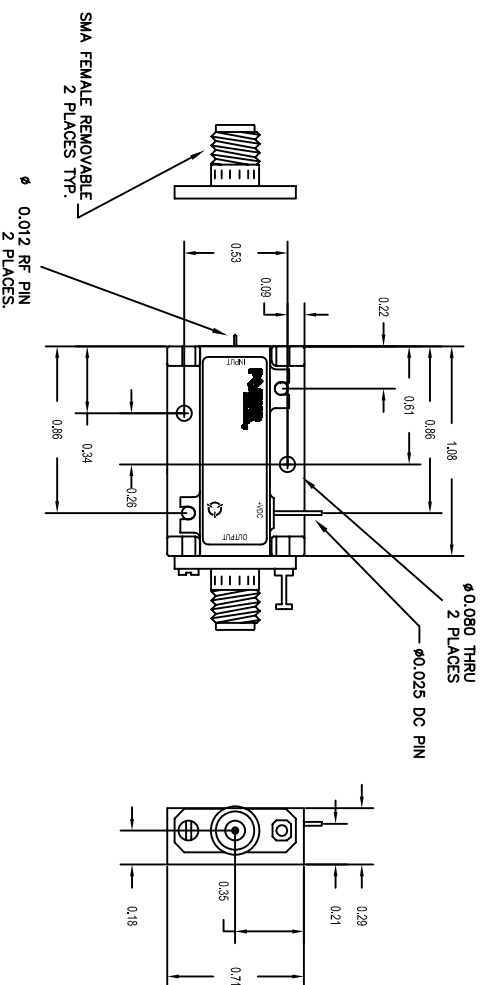

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

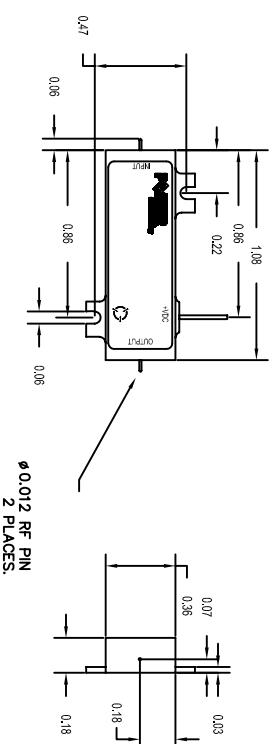

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ± 0.010 ±
.XXX ± 0.005

PART NO.		APPROVALS		DATE		TITLE	
MATERIAL:		6061-T6 Aluminum		K. Mason		2/27/03	
FINISH:		Gold Plate over Nickel		REVISION		B.1LK53	
DO NOT SCALE DRAWING		5715 Industry Lane, Unit 11		FREDERICK, MARYLAND		PRODUCT FEATURE	
		PE2-15-1804R0-4R5-15-12-SF		WEB - MODEL		A	
		1 OF 1					