

NOTES:



- 1.) IMPEDANCE/50 OHMS
- 2.) DIELECTRIC WITHSTANDING VOLTAGE/1000 V RMS
- 3.) WORKING VOLTAGE/335 V RMS
- 4.) INSULATION RESISTANCE/1000 MEGOHMS MIN.
- 5.) TEMPERATURE RANGE/-65°C TO +165°C

MATERIAL:

- A.) BODY-BRASS,COMP.22,1/2HD,QQ-B-626.
- B.) CONTACT-BERYLLIUM COPPER PER QQ-C-530.
- C.) INSULATOR-TEFLON PER L-P-403.

FINISH:

- A.) BODY-NICKEL
- B.) CONTACT-GOLD

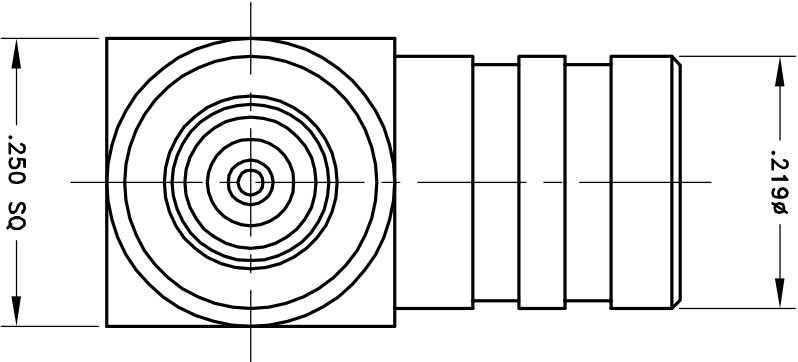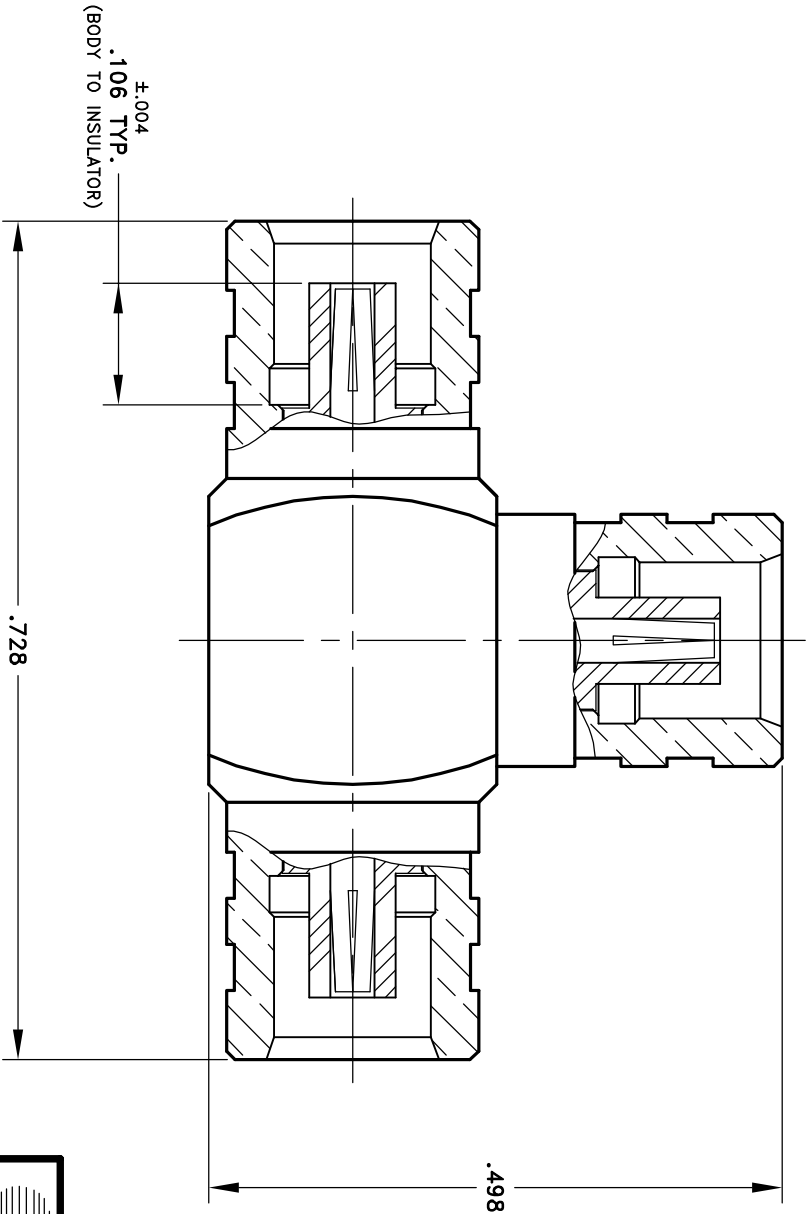

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
& MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.



DWG BY: RLC DATE: 2/26/09
APVD BY: SCALE: _____

MATERIAL: _____

FINISH: _____

DESCRIPTION: MCX

ADAPTOR, TEE, JACK-JACK-JACK

FSCM 43608

TOLERANCES

UNLESS OTHERWISE SPECIFIED

2 PL DEC $\pm .020$

3 PL DEC $\pm .005$

ANG. DIM $\pm 1/2^\circ$

DRAWING NO.

79-605

SHT 1 OF 1

REVISIONS

OUTLINE DRAWING