

REVISIONS				DATE	APPROVED
2	REV	DESCRIPTION		8/7/08	
-		ORIGINAL RELEASE			

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

- Frequency Range: 0.5 to 8.0 GHz
- Gain: 15dB Typ.
- Gain Flatness: +/-1.0dB Max.
- Noise Figure: 4.5dB Typ.
- OP1dB: 13dBm Min.
- VSWR Input/Output: 2.0:1 Max.
- DC Voltage Supply: +12 to +15VDC
- DC Current Draw: 65mA Max.

Features:

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C

Available Options:

- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available

Environmental Ratings:


- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)
- 55 to +125 Deg. C (Storage)
- Humidity: MIL-STD-202F, METHOD 103B COND B.
- Shock: MIL-STD-202F, METHOD 213B COND B.
- Altitude: MIL-STD-202F, METHOD 105C COND B.
- Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

PE2 HOUSING WITH CARRIER



PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

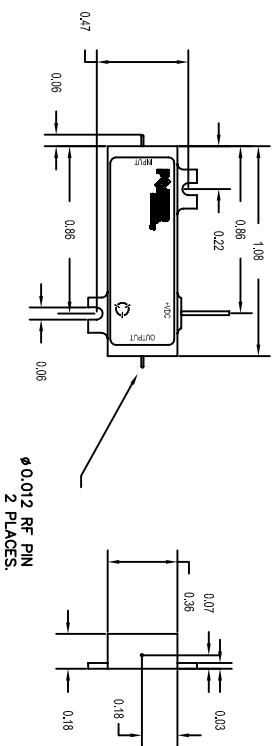

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± ± ±
.XXX ± 0.005
XXX ± 0.005

PART NO.		DATE		DATE	
MATERIAL:		K. Mason		8/21/08	
6061-T6 Aluminum		FINISH:		Gold Plate over Nickel	
DO NOT SCALE DRAWING		N/A		N/A	

5715 Industry Lane, Unit 11		FREDERICK, MARYLAND	
PRODUCT FEATURE		PE2-15-0P5880-4P5-15-12-SFF	
B. 1LK53		WEB - MODEL	
REV		REV	
1 OF 1		A	