

DESCRIPTION

LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR STANDARD PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR A SURFACE MOUNT COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. THIS MODEL PROVIDES THE FOLLOWING PERFORMANCE. DATA IS AVAILABLE UPON REQUEST.

SPECIFICATIONS

- FREQUENCY RANGE: 2.0 to 4.0 GHZ
- GAIN: 30dB TYPICAL
- GAIN FLATNESS: ± 1.0 dB MAXIMUM
- NOISE FIGURE: 1.5dB TYPICAL
- OP1dB: +21dBm MINIMUM
- VSWR (IN/OUT): 2.0:1 MAXIMUM
- CONNECTORS: SMA (F) REMOVABLE
- DC SUPPLY: +12 TO +15VDC @ 300mA NOMINAL
- SIZE (L) 1.08" X (W) 0.71" X (H) 0.29"
EXCLUDING CONNECTORS
- FINISH GOLD PLATED

FEATURES

- INTERNAL VOLTAGE REGULATION
- UNCONDITIONAL STABILITY

AVAILABLE OPTIONS

- VARIOUS PACKAGE TYPES
- VARIOUS CONNECTOR TYPES
- TEMPERATURE COMPENSATION
- GAIN AND PHASE MATCHING
- MIL-STD-883 SCREENING AVAILABLE

ENVIRONMENTAL RATINGS

- TEMPERATURE: -20°C TO + 70°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A


NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	05/29/14	
	A1	ECN #15-0148	11/5/15	

MECHANICAL OUTLINE

PE2 HOUSING WITH CARRIER

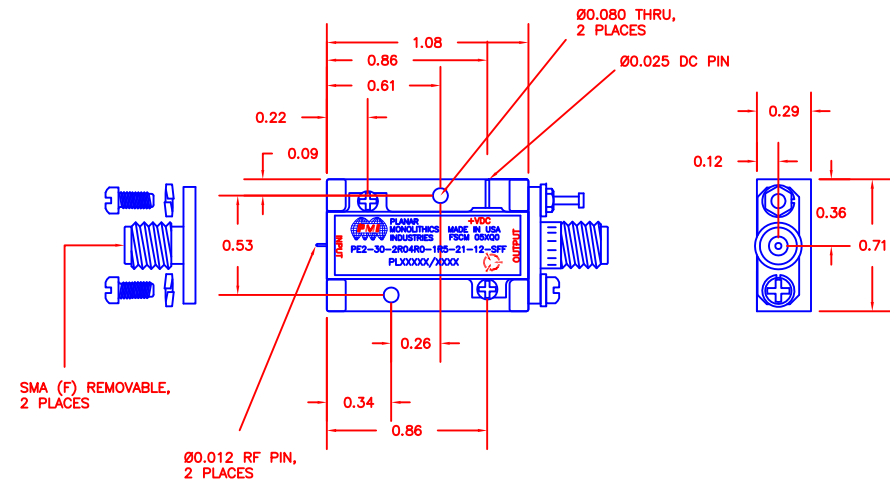

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

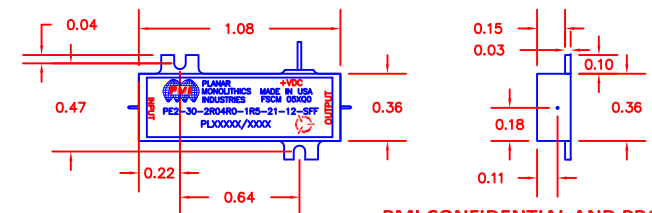

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN <i>sfk</i>		05/29/14		PRODUCT FEATURE	
CHECKED				PE2-30-2R04R0-1R5-21-12-SFF	
ISSUED					
SIZE A		FSCM NO. 05XQ0		DWG NO. 27022782	
SCALE N:S				REV. A1	
				SHEET 1 OF 1	