
DRAWING # SSMAM3-0601


SHEET **1 OF 1**


SSMA CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)


Gender	Plug
Orientation	Straight
Insulator Material	PTFE
Body Material	Brass
Body Finish	Gold
Contact Material	Brass
Contact Finish	Gold
Termination Style	Cable - Crimp
Impedance	50 Ohm
Contact Termination	Solder
Coupling Mechanism	Threaded
Polarity	Standard
Thread Direction	Standard
Max Freq (Ghz)	12.4
Ext Dielectric	No
Isolated	No
Low PIM	No
RoHS Compliant	Yes
REACH Compliant	Yes

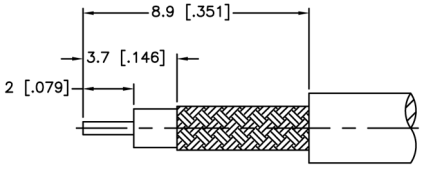

RECOMMENDED
CABLE STRIPPING DIM'S

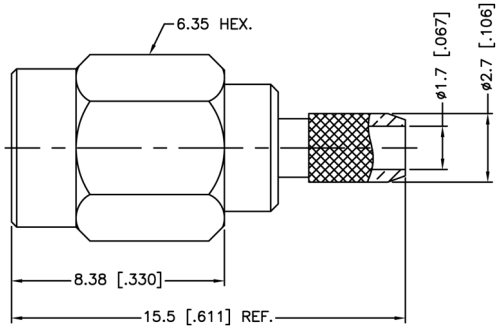





NOTE:
1. CRIMPED FERRULE
   HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

REV	DESCRIPTION	DRAWN	DATE	APPR.	DATE
A	Electronic update	PB	2/10/2014	FB	2/10/2014

MIDISCO
9930 Clint Moore Road, Boca Raton, FL 33496
(800) 637-4353(MDSHELF) Fax: (631) 589-8167

DESCRIPTION SSMA CRIMP PLUG FOR RG-174/U 188A/U 316/U CABLE

SIZE	CAGE CODE	DRAWING #	REVISION
A	52335	SSMAM3-0601	A

THIS DRAWING INCLUDING THE DESIGN IS PROPERTY OF MIDISCO AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT PERMISSION.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES OR MILLIMETERS AND ARE FOR CUSTOMER REFERENCE ONLY.