

700 to 3500MHz – 4 Port Dual Junction Coaxial Circulator

Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss (1-2 & 3-4) Max(dB)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Forward Power (W)	Reverse Power (W)	Connector Type	Temp.(°C)
UIYCDC6432A4P800T900NF	800 ~ 900	0.8	40	1.25	200	200	N-F	-30 ~ +70
UIYCDC6432A4P925T960SF	925 ~ 960	0.6	45	1.2	100	100	SMA-F	-30 ~ +70
UIYCDC6432A4P960T1215NF	960 ~ 1215	0.8	40	1.25	200	200	N-F	-30 ~ +70
UIYCDC6432A4P1350T1500SF	1350 ~ 1500	0.6	40	1.25	150	150	SMA-F	-40 ~ +85
UIYCDC6432A4P1450T1700SF	1450 ~ 1700	0.8	40	1.25	100	100	SMA-F	-20 ~ +65
UIYCDC6432A4P1600T1700SF	1600 ~ 1700	0.6	50	1.15	100	100	SMA-F	-30 ~ +70
UIYCDC6432A4P1600T2000NF	1600 ~ 2000	1.0	36	1.3	200	200	N-F	-20 ~ +65
UIYCDC6432A4P1700T2200SF	1700 ~ 2200	1.0	36	1.3	100	100	SMA-F	-30 ~ +70
UIYCDC6432A4P1710T1785SF	1710 ~ 1785	0.6	50	1.15	100	100	SMA-F	-30 ~ +70
UIYCDC6432A4P1800T2400SF	1800 ~ 2400	1.0	36	1.3	100	100	SMA-F	-40 ~ +70
UIYCDC6432A4P2000T2500SF	2000 ~ 2500	0.8	40	1.25	100	100	SMA-F	-40 ~ +70
UIYCDC6432A4P2000T2700SF	2000 ~ 2700	1.0	36	1.3	100	100	SMA-F	-40 ~ +70
UIYCDC6432A4P2110T2170SF	2110 ~ 2170	0.6	50	1.15	100	100	SMA-F	-40 ~ +85
UIYCDC6432A4P2300T2500SF	2300 ~ 2500	0.6	45	1.2	100	100	SMA-F	-40 ~ +85
UIYCDC6432A4P2400T2600SF	2400 ~ 2600	0.6	45	1.2	100	100	SMA-F	-40 ~ +85
UIYCDC6432A4P2500T2700SF	2500 ~ 2700	0.6	45	1.2	100	100	SMA-F	-40 ~ +85
UIYCDC6432A4P2500T2700NF	2500 ~ 2700	0.6	45	1.2	100	100	N-F	-40 ~ +85
UIYCDC6432A4P2900T3100SF	2900 ~ 3100	0.7	40	1.3	100	100	SMA-F	-40 ~ +85
UIYCDC6432A4P3100T3500SF	3100 ~ 3500	0.7	40	1.3	100	100	SMA-F	-40 ~ +85

² List are specify frequency range and other ranges available.

² Please enter below information when inquiry and mark * is must.


- * 1. The specific frequency range

- * 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)

4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

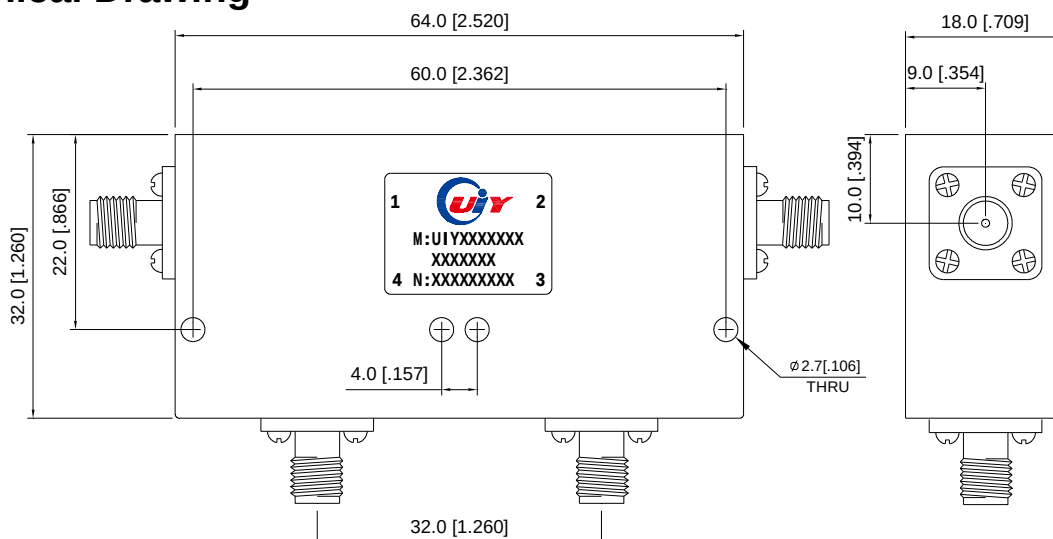

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

3/F, Building A5, Shenbao Power Industrial Park, Shenzhen 518116, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com