


REV.	DESCRIPTION	DATE	APP'D.
A	SEE ECO GM-8122	4-6-98	

MATERIAL AND FINISH

FLANGE: CRES 303 PER ASTM A 484
AND ASTM A 582 OR ASTM A 555
AND ASTM A 581. PASSIVATE PER
MIL-F-14072 E300.

CENTER CONTACT
AND JACK HOUSING: BERYLLIUM COPPER PER ASTM
B 196 AND/OR ASTM B 197.
GOLD PLATE PER MIL-G-45204;
TYPE I, GRADE C, CLASS 1.
OVER NICKEL PER QQ-N-290A;
CLASS 1; 50 MICROINCHES MIN.

DIELECTRICS: VIRGIN PTFE FLUOROCARBON PER
ASTM D 1710 AND ASTM D 1457.

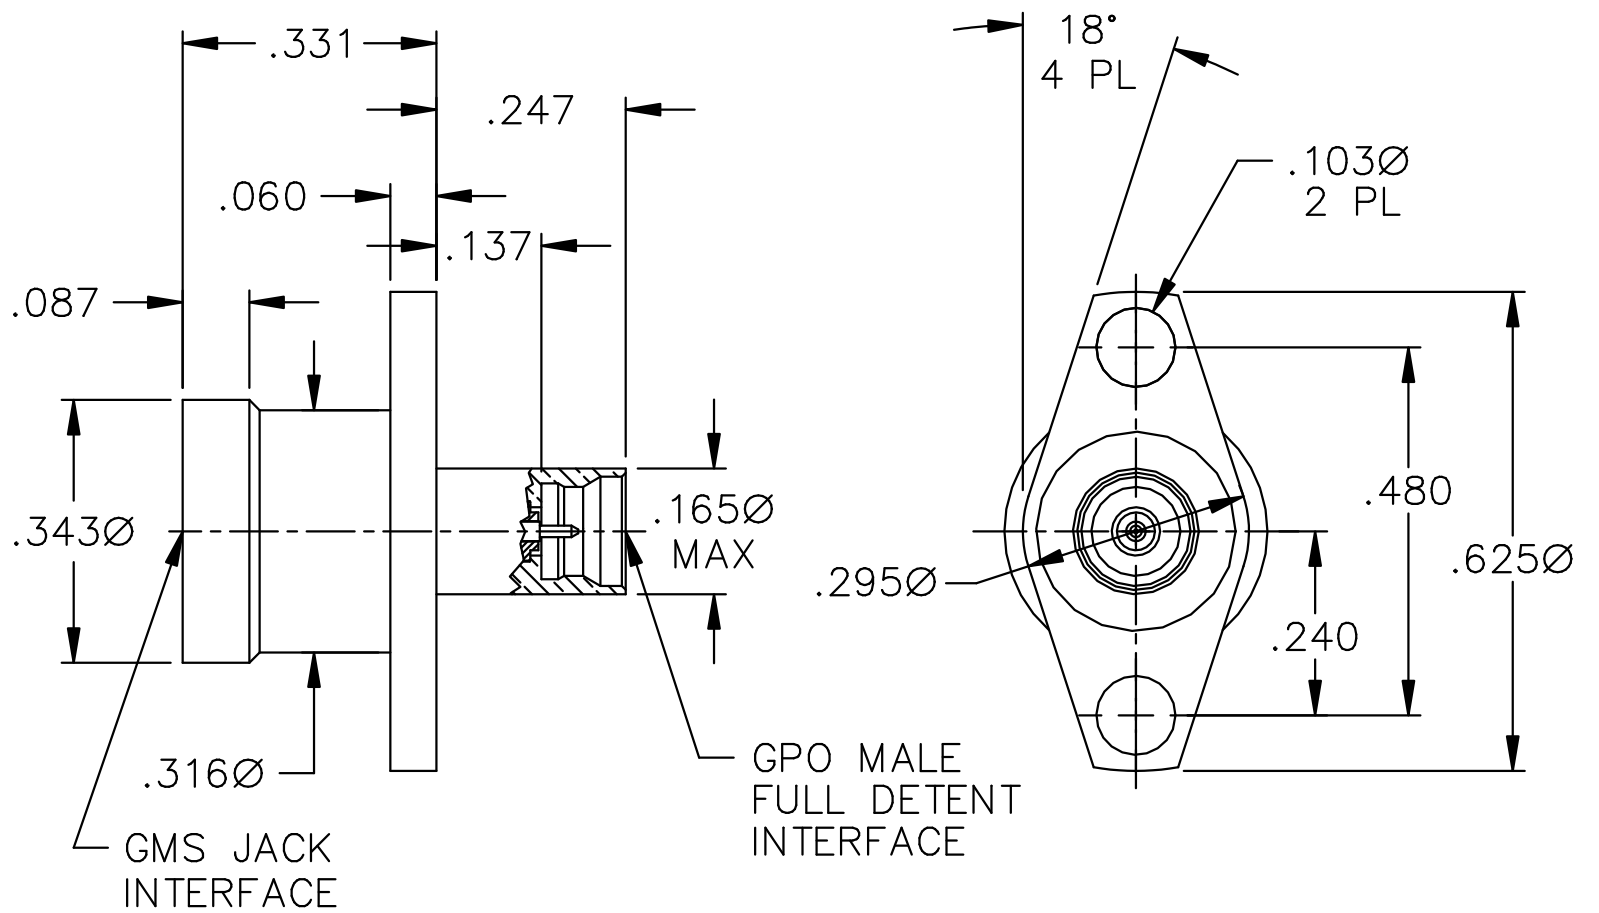

ALL DIMENSIONS ARE IN INCHES				CAT. NO. 00118-118-3		CODE IDENT NO. 82316		
GILBERT ENGINEERING CO., INC.								
BY			DATE		TITLE OUTLINE DRAWING FOR GMS JACK 2 HOLE FLANGE MOUNT TO GPO MALE FULL DETENT ADAPTOR			
DRAWN: HCP			3-9-98					
ASSEMBLY PROCEDURES: NONE								
SOURCE FILE: SK-1407		SHT.	1	OF	1	DWG. NO. 0L-00118-118-3		REV A