

Description:

Integrated RF module that contains an input limiter, limiting amplifier, and output fixed attenuator which is designed for Military and Industrial applications. This module is supplied in a SMA connectorized housing.

This model provides the following performance.

Specifications:

Frequency Range:	50 to 2500 MHz
Input Power:	-50 to +30dBm CW
Output Power:	+2.0dBm Nominal +/-3.5dB (over input power range)
Noise Figure:	10dB Typical above 500MHz
Spurious Rejection:	-60dBc typ.
Harmonic Rejection:	-10dBc typ.
VSWR Input/Output:	2.0:1 Max.
DC Voltage Supply:	+12 to +15VDC
DC Current Draw:	460 mA Nominal
Connectors:	SMA(F)
Specifications Temperature:	+23 Deg. C

Features:

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C

Available Options:

- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available

Environmental Ratings:

Temperature:	-20 to +70 Deg. C (Operating) ; -55 to +85 Deg C Available)
	-55 to +125 Deg. C (Storage)
Humidity:	MIL-STD-202F, METHOD 103B COND B.
Shock:	MIL-STD-202F, METHOD 213B COND B.
Altitude:	MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle:	MIL-STD-202F, METHOD 107D COND A



Note: The above specifications are subject to change or revision.

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	ORIGINAL RELEASE	11/18/09	


MECHANICAL OUTLINE

Functional Block Diagram

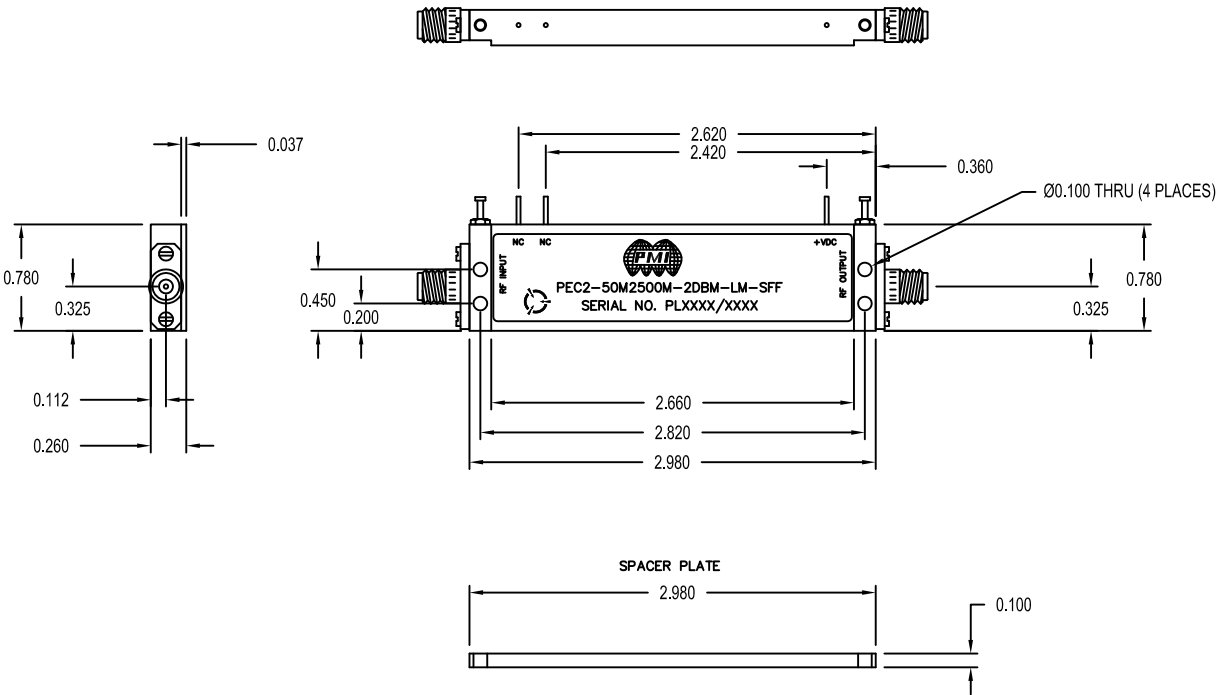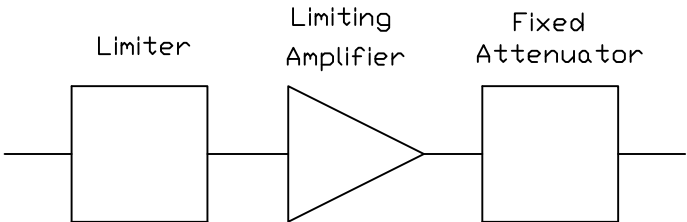

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE		TITLE			
DRAWN		11/18/09		PRODUCT FEATURE			
CHECKED				SIZE	FSCM NO.	DWG NO.	REV.
ISSUED				A	05XQ0	27014941	A
				SCALE	N: S	SHEET	1 OF 1