
21-146-1000-12

NOTES:

Materials: Beryllium Copper per ASTM-B-196, QQ-C-530
PTFE Fluorocarbon per ASTM-D-1710 Type 1

Finish: Center Conductors, Body and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290.

Frequency: DC-27 GHz
VSWR: 1.2 TO 27 GHz
Insertion Loss: .05(SQRT(F(GHz)))

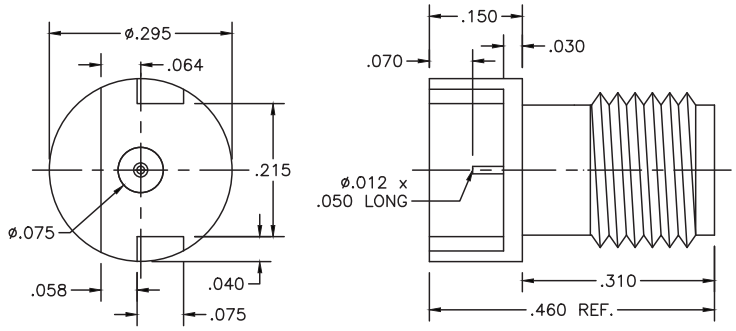

LTR	DESCRIPTION	DATE	APPR.
–	REL	7/09	

DRAWN DRP | CHECKED
APPR. | SCALE

UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX
3. CHAMFER 1st & LAST THREADS 45°
4. SURFACE FINISHED 32√ UNLESS OTHERWISE SPECIFIED.
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES
TOLERANCES

DECIMALS		FRACTIONAL	ANGULAR	
.X	±.030	± 1/64	.X°	±1°0′
.XX	±.010		.X°X′	±15′
.XXX	+.005			

USED ON 21-146-1000-12

MATERIAL

FINISH

SRI CONNECTOR GAGE CO.
751 NORTH DRIVE
MELBOURNE FL. 32934

TITLE
SMA FEMALE
PCB MOUNT

SIZE	FSCM NO.	SHEET	DWG. NO.
A	OHMO1	1	21-146-1000-12