

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

Specifications:

Frequency Range: 8 to 12 GHz
Gain: +25dB Typ.
Gain Flatness: +/- 1.0dB Typ.
Noise Figure: 1.8dB Typ.
OP1dB: +10dBm Typ.
VSWR Input/Output: 2.0:1 Typ.
DC Voltage Supply: +12VDC
DC Current Draw: 75mA Typ.
Connectors In/Out: SMA Female
Finish: Gold Plated

Features:

Internal Voltage Regulation
Unconditional Stability

Available Options:

Various Package types
Various Connector types
Temperature Compensation
Gain and Phase Matching
MIL-STD-883 Screening Available

Environmental Ratings:


Temperature: -54°C to +95°C (Operating)
..... -65°C to +125°C (Storage)
Humidity: MIL-STD-202F, METHOD 103B COND B.
Shock: MIL-STD-202F, METHOD 213B COND B.
Altitude: MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.


ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	2/28/12	
	A2	UPDATED LABEL	07/08/13	

PE2 HOUSING WITH CARRIER

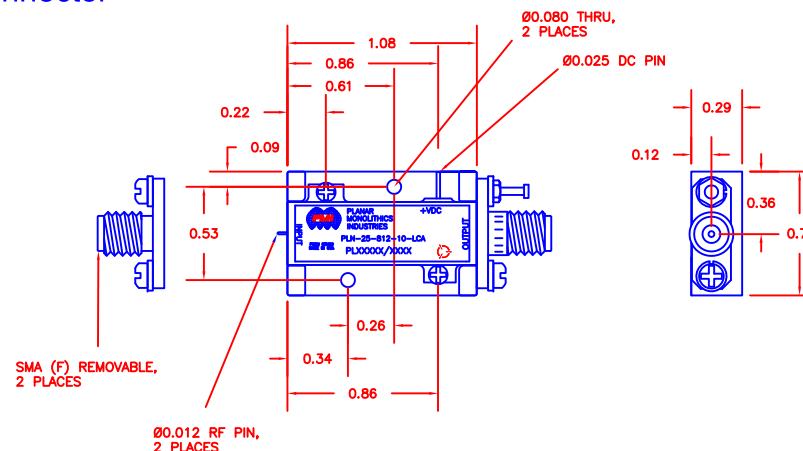

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

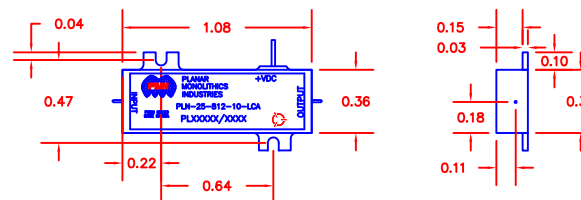

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001:2008 CERTIFIED



APPROVALS		DATE		TITLE			
DRAWN		gjr		2/28/12		PRODUCT FEATURE	
CHECKED						PLN-25-812-10-LCA	
ISSUED							
SIZE		FSCM NO.		DWG NO.		REV.	
A		05XQ0		PLN-25-812-10-LCA		A2	
SCALE		N:S		SHEET		1 OF 1	