



REV.	DATE	DESCRIPTION
NC	01/04/00	INITIAL RELEASE
A	04/06/06	UPDATE DRAWING FORMAT

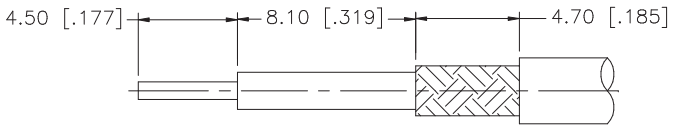


RECOMMENDED
CABLE STRIPPING DIM'S

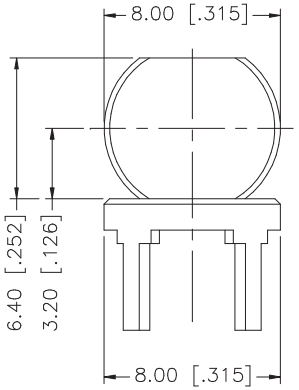

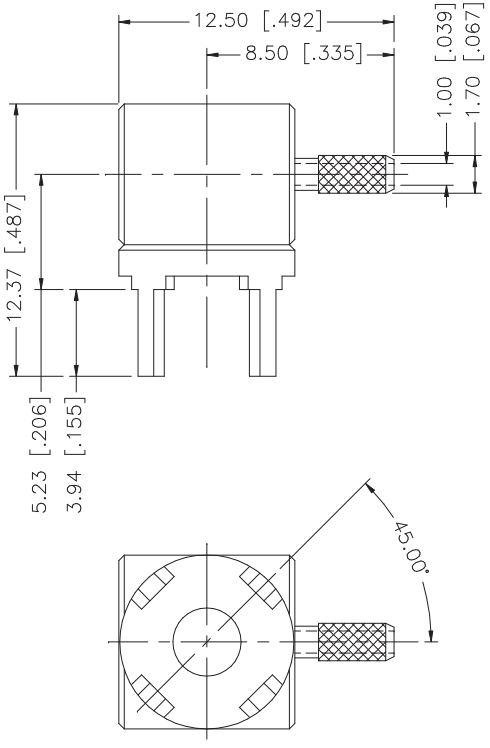



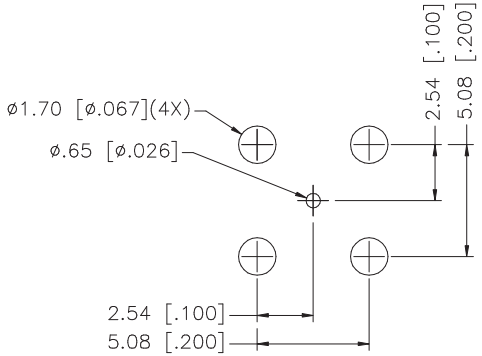

RECOMMENDED
MOUNTING HOLES

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4				
3	FERRULE	COPPER	GOLD	1
2	BODY	BRASS	GOLD	1
1	BARREL	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	04/06/06
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/142/142270.DWG

Amphenol Connex

PART DESCRIPTION
R/A PCB CABLE TERMINATION
(FOR RG-178B/U, 196A/U CABLE)

PART NO. 142270

DWG. NO.	REV.	SIZE	SCALE
142270.DWG	A	A	NA