

REV.	DESCRIPTION	DATE	BY
C	SEE ECO GM-9730	5/11/99	CGA


MATERIAL AND FINISH

HOUSING: CRES 303 PER ASTM A 484
AND ASTM A 582 OR ASTM A 555
AND ASTM A 581. PASSIVATE PER
MIL-F-14072 E300.

PIN CONTACT: BERYLLIUM COPPER PER ASTM
B 196 AND/OR ASTM B 197.
GOLD PLATE PER MIL-G-45204;
TYPE 1, GRADE C, CLASS 1.
OVER NICKEL PER QQ-N-290A;
CLASS 1; 50 MICROINCHES MIN.

DIELECTRICS: VIRGIN PTFE FLUOROCARBON PER
ASTM D 1710 AND ASTM D 1457.

O-RING: VITON (FLUOROCARBON) PER
MIL-R-83248/1

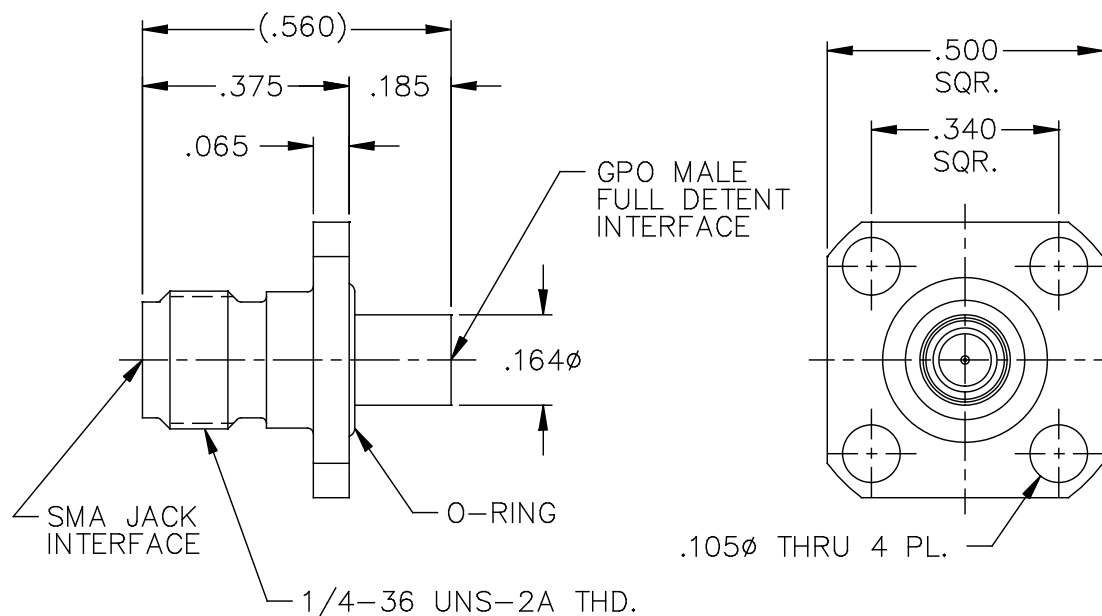

This drawing and any data contained therein is the property of Gilbert Engineering Co., Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use, or disclose any information contained herein except as expressly authorized by Gilbert Engineering Co., Inc.

ALL DIMENSIONS ARE IN INCHES

CAT. NO. 00219-142-3-V10

CODE IDENT NO.
82316

GILBERT ENGINEERING CO., INC.

BY	DATE	TITLE	DWG. NO.	REV
DRAWN: JRM	4/29/97	OUTLINE DRAWING FOR GPO MALE FULL DETENT TO SMA JACK 4 HOLE FLANGE MOUNT ADAPTOR	OL-00219-142-3-V10	C
ASSEMBLY PROCEDURES: NONE				
SOURCE FILE: SK-1188	SHT. 1 OF 1			