



REV.	DATE	DESCRIPTION
NC	02/24/03	INITIAL RELEASE

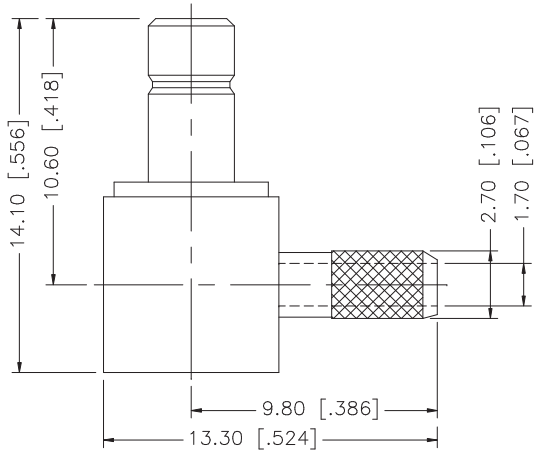




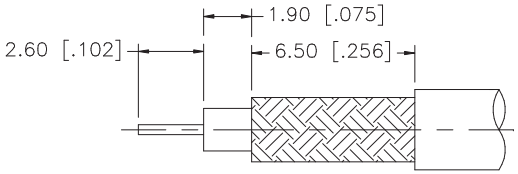

RECOMMENDED CABLE STRIPPING DIM'S



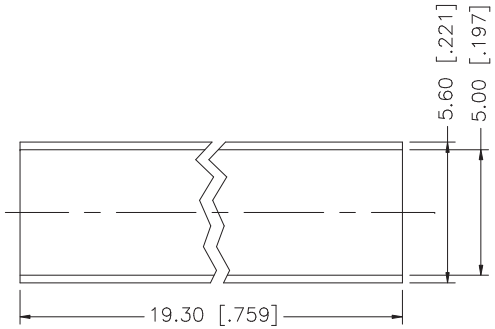

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

8	HEAT SHRINK TUBE			1
7	FERRULE	COPPER	GOLD	1
6	COVER	BRASS	GOLD	1
5	INSULATOR	P.E.	NATURAL	1
4	INSULATOR	TEFLON	NATURAL	1
3	CONTACT PIN	BRASS	GOLD	1
2	BARREL	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	02/24/03
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/142/142252.DWG

Amphenol Connex

PART DESCRIPTION
SMB R/A CRIMP JACK
(FOR RG-174/U, 188A/U, 316/U CABLE)

PART NO. 142252

DWG. NO. 142252.DWG | REV. NC | SIZE A | SCALE NA