


- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 VOLTAGE RATING: 500V RMS (sea level)
- 1.3 NOMINAL IMPEDANCE: 50 OHMS
- 1.4 DWV: 1500V RMS @ 60Hz (sea level)
- 1.5 TEMPERATURE RANGE: -65°C TO +165°C
- 2.0 MATERIALS
- 2.1 DIELECTRIC: TEFLON, ASTM-D-1710
- 2.2 CENTER CONTACT: BERYLLIUM COPPER, ASTM-B-196

2.3 LOCKING RING: BERYLLIUM COPPER, ASTM-B-196
2.4 ALL OTHER METAL PARTS: BRASS, ASTM-B-16
2.5 GASKET: SILICON RUBBER, ZZ-R-765, GR. 50, RED
3.0 FINISHES
3.1 CENTER CONTACT: GOLD PLATED
3.2 ALL OTHER METAL PARTS: NICKEL PLATED
4.0 MECHANICAL
4.1 INTERFACES PER MIL-STD-348

DWG NO. OL-0910-15-1		REV. A
PLATING VARIATIONS		
PART NUMBER	BODY	CONTACT
0910-15-NG	NICKEL	GOLD

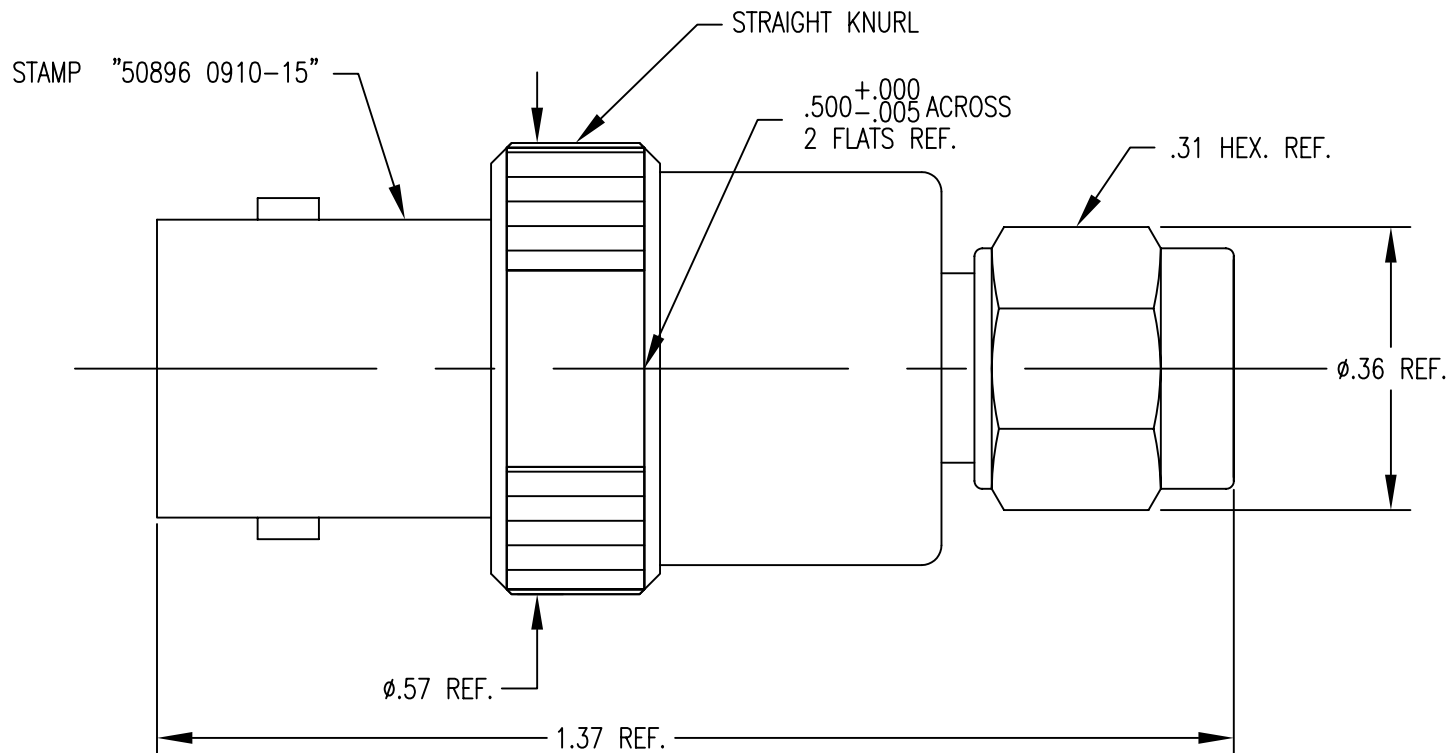


A	ORIGINAL	NEW	8/18/03		
Rev.	Revisions	Disp.	Date	Dwn.	Appd.

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION
 PROPRIETARY TO SAN-TRON INC. IT MUST NOT BE
 REPRODUCED OR DISCLOSED TO OTHERS OR USED IN
 ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS
 AUTHORIZED IN WRITING BY SAN-TRON INCORPORATED.

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES.
ALL DIMENSIONS ARE AFTER PLATING.
.XXX= ±.005 ALL MACHINED SURFACES ⁶³✓ MAX.
.XX= ±.01 ANG.±1/2° FRACTIONAL= ±1/64

◎.004 MAX. TIR.	⊥	AXIS	.001
-----------------	---	------	------



THIRD ANGLE PROJECTION

DWN	RD	8/19/03
CHKD	SJS	8/19/03
APPR	FSH	8/20/03



SAN-TRON, INC.

4 NEWBURYPORT TPK. IPSWICH MA USA 01938

TEL: 978 - 356 -1585 FAX: 978 - 356 -1573

WWW.santron.com E MAIL: santron@santron.com

TITLE	ADAPTER, STARIGHT, BNC (F) – SMA (M)
-------	---

MATERIAL:

SEE NOTE 2.0

FINISH:

SEE NOTE 3.0

CAGE CODE:	50896
------------	-------

DWG NO.	
---------	--

SCALE	4:1
-------	-----

OL-0910-15-1	A
--------------	---

REV.