


1.0 PERFORMANCE

- 1.1 FREQUENCY RANGE: DC-4GHz
- 1.2 VOLTAGE RATING: 500V RMS (sea level)
- 1.3 NOMINAL IMPEDANCE: 50 OHMS
- 1.4 DWV: 1500 V RMS @ 60 Hz (sea level)
- 1.5 TEMPERATURE RANGE: -65°C TO +165°C
- 2.0 MATERIALS
- 2.1 DIELECTRIC: TEFLON, ASTM-D-1710

2.2 CONTACT: BRASS PER ASTM-B-16

- 2.3 GASKETS: SILICON RUBBER, ZZ-R-765, GR. 50, RED
- 2.4 SPRINGWASHERS: BERYLLIUM COPPER PER ASTM-B-194
- 2.5 ALL OTHER METAL PARTS: BRASS PER ASTM-B-16
- 3.0. FINISHES
- 3.1 CONTACT: SILVER PLATED
- 3.2 ALL OTHER METAL PARTS: NICKEL PLATED
- 4.0 MECHANICAL
- 4.1 INTERFACES PER MIL-STD-348

DWG NO.	REV.
OL-0910-14-1	A

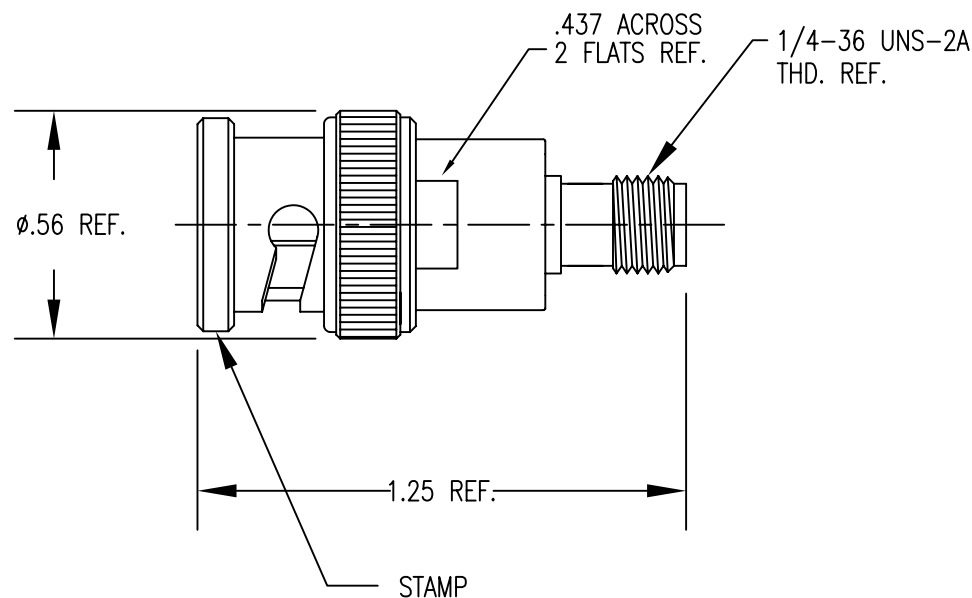

						THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON INCORPORATED. UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES. ALL DIMENSIONS ARE AFTER PLATING. ALL MACHINED SURFACES $\sqrt{63}$ MAX. .XXX = ± 0.005 .XX = ± 0.01 FRACTIONAL = $\pm 1/64$ ©.002 MAX. TIR ANG. $\pm 1/2^\circ$ $\perp$ AXIS .001						SAN-TRON, INC. 4 NEWBURYPORT TPK. IPSWICH MA USA 01938 TEL: 978 - 356 -1585 FAX: 978 - 356 -1573 WWW.santron.com E MAIL: santron@santron.com					
						TITLE ADAPTER, STRAIGHT, BNC (M) TO SMA (F)						MATERIAL: SEE NOTE 2.0 FINISH: SEE NOTE 3.0					
A ORIGINAL						NEW 02/03/03 XXX XXX						RECOM. STOCK SIZE FT/M PCS					
Rev. Revisions						Disp. Date Dwn. Appd.						REMOVE ALL BURRS AND SHARP EDGES .005 MAX.					
INTERPRET PER ANSI Y14.5M-1982						THIRD ANGLE PROJECTION						DWN LAP 02/03/03					
						CHKD SJS 02/03/03						CAGE CODE: 50896					
						APPR FSH 02/03/03						SCALE 2 : 1					
												DWG NO. OL-0910-14-1					
												REV. A					