



REV.	DATE	ECR NO.	DESCRIPTION
NC	01/25/99	–	INITIAL RELEASE
A	07/20/05	–	UPDATE DRAWING FORMAT
B	05/08/07	–	REVISE BARREL AND FERRULE DIMENSIONS
C	05/25/08	–	REVISE NOTE 1 TO .151" HEX, REMOVE NOTE 2.

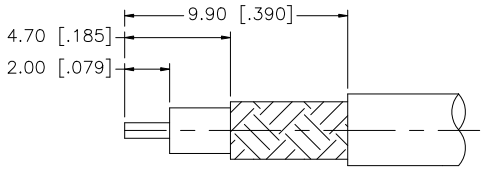

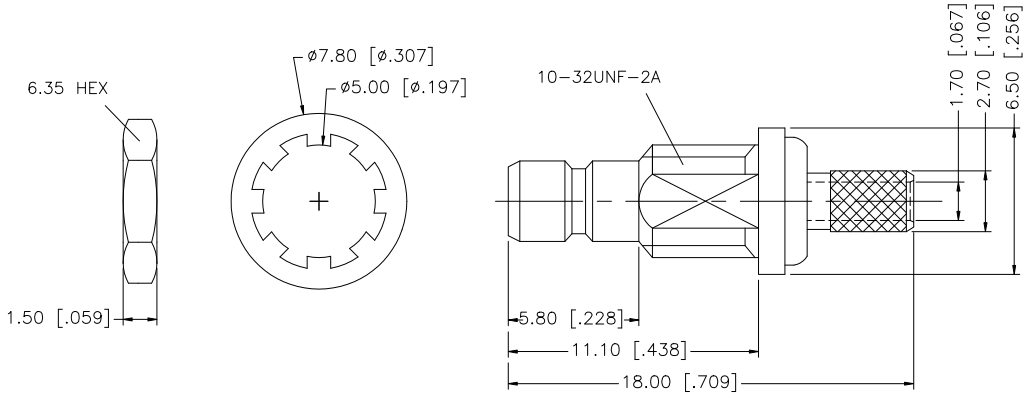

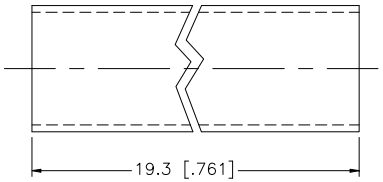



NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. (REMOVED)
3. MAX. PANEL THICKNESS = 2.4mm

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7	HEAT SHRINK TUBE			1
6	FERRULE	COPPER	GOLD	1
5	HEX NUT	BRASS	GOLD	1
4	LOCK WASHER	BRASS	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	05/25/08
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/142/142192.DWG

Amphenol Connex

PART DESCRIPTION: SMB BULKHEAD CRIMP JACK (FOR RG–316U/D CABLE)

PART NO. 142192

DWG. NO.	REV.	SIZE	SCALE
142192.DWG	C	A	NA