



REV.	DATE	ECR NO.	DESCRIPTION
NC	10/15/04	–	INITIAL RELEASE
A	10/20/08	–	ADD LOCKWASHER AND NUT

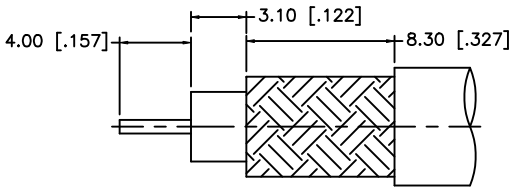



RECOMMENDED
CABLE STRIPPING DIM'S

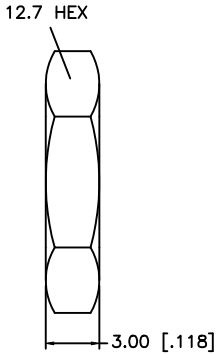




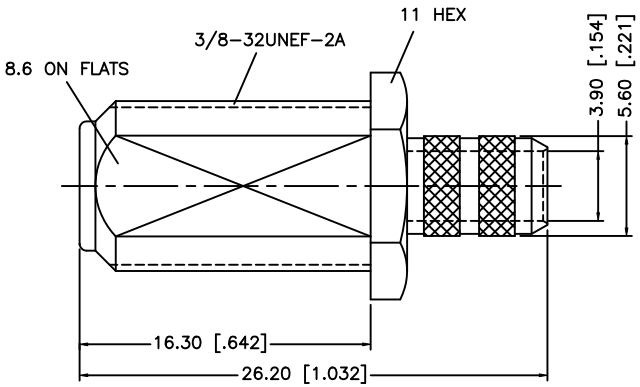

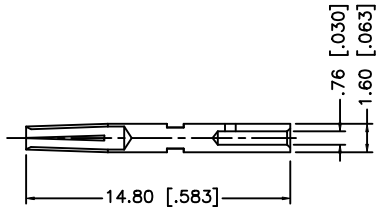



RECOMMENDED
MOUNTING HOLE



NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.48]
2. CONTACT PIN TO SOLDER

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6	FERRULE	COPPER	NICKEL	1
5	HEX NUT	BRASS	NICKEL	1
4	LOCK WASHER	BRASS	NICKEL	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN GRS	10/20/08
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/222/222158.DWG

Amphenol Connex

PART DESCRIPTION
F CRIMP JACK
(FOR BELDEN 8241, RG–59/U)

PART NO. 222158

DWG. NO.	REV.	SIZE	SCALE
222158.DWG	A	A	NA