



REV.	DATE	DESCRIPTION
NC	11/08/99	INITIAL RELEASE
A	02/21/07	UPDATE DRAWING FORMAT
B	08/19/07	REVISE CAP DIMENSIONS

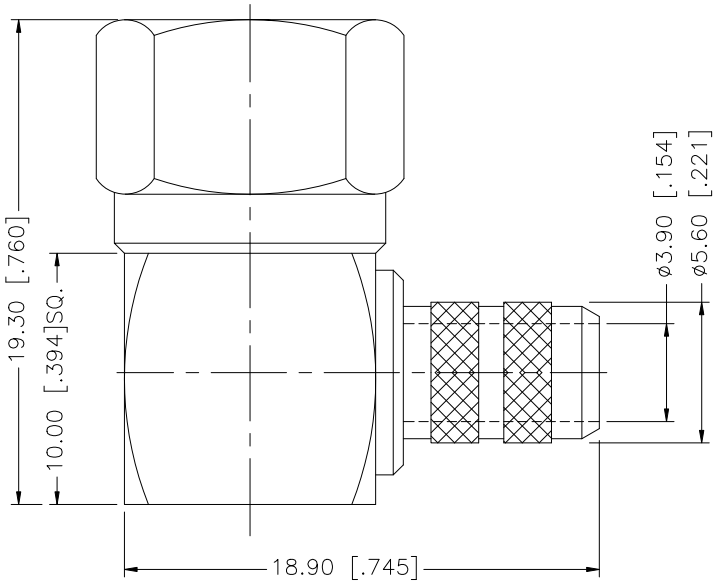

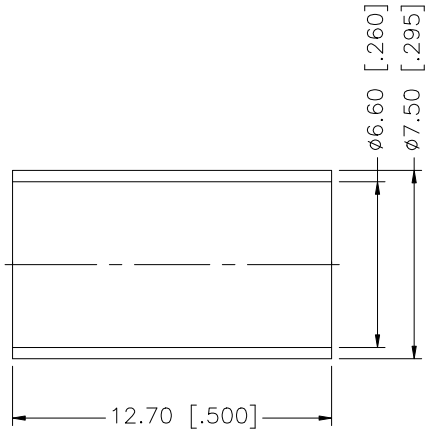

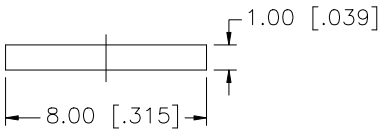

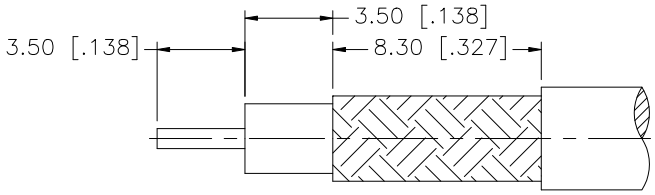

RECOMMENDED
CABLE STRIPPING DIM'S

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	FERRULE	COPPER	NICKEL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	08/19/07
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/222/222153.DWG

Amphenol Connex

PART DESCRIPTION
F R/A CRIMP PLUG
(FOR RG-59/U)

PART NO. 222153

DWG. NO.	REV.	SIZE	SCALE
222153.DWG	B	A	NA