


- 1.0 PERFORMANCE
1.1 FREQ RANGE: DC-12.4 GHz
1.2 RL < (-28dB, 2 GHz), (-18dB, 12.4 GHz)
1.3 NOMINAL IMPEDANCE: 50 OHMS
1.4 DWV: 2.5 kVrms, 60 Hz
1.5 TEMP RANGE: -65 / +165°C
1.6 PIM < -165 dBc (PLATING -US)

- 2.0 MATERIALS: RoHS/REACH
2.1 DIELECTRIC: PTFE
2.2 CENTER CONTACT: BeCu
2.3 OTHER METAL PARTS: BRASS
3.0 FINISH: SEE TABLE

- 3.0 MECHANICAL
3.1 INTERFACE PER MIL-STD-348
3.2 DURABILITY: 500 CYCLES

DWG NO. OL-0410-22-1		REV. B
PART NUMBER	BODY	CONTACT
0410-22-NG	NICKEL	GOLD
0410-22-US	ALBALOY	SILVER
PLATING PER SAN-TRON SPEC. 7.3.1-8		

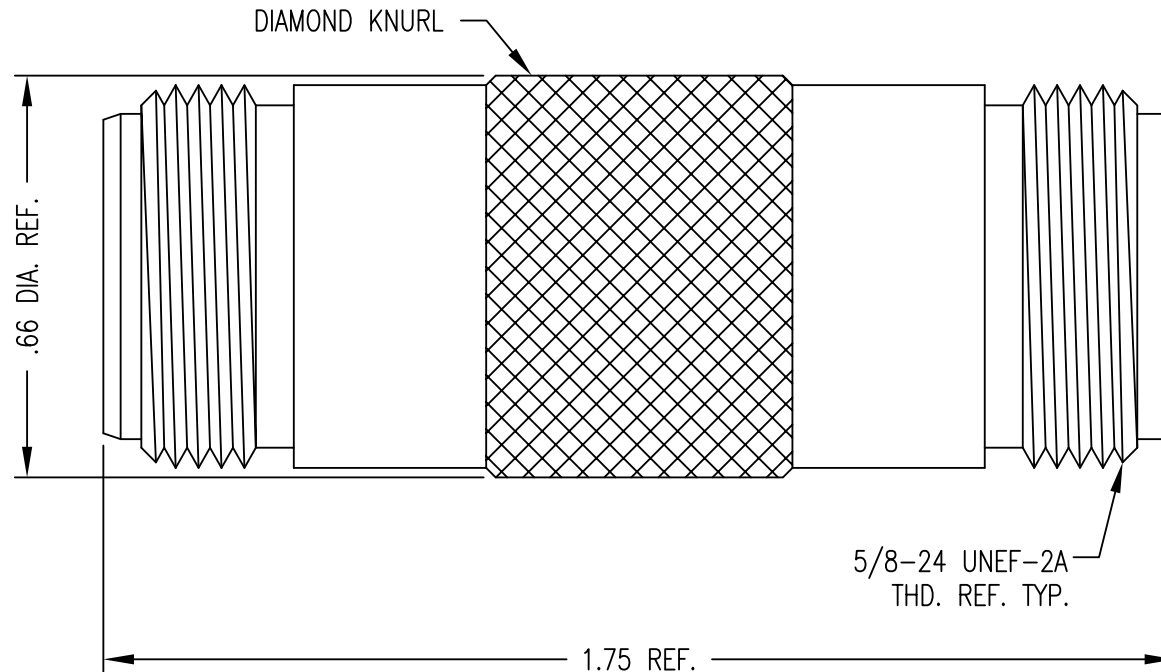

Rev.	Revisions	Disp.	Date	Dwn.	Appd.
B	UPDATE PERFORMANCE NOTES	MIX	10-5-11	FSH	FSH
A	OUTLINE ISSUED	NEW	8/18/08		
Ref.:	SK-	REMOVE ALL BURRS AND SHARP EDGES .005 MAX.	INTERPRET PER ASME Y14.5M-1994		

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON, INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON, INC.			UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES. ALL DIMENSIONS ARE AFTER PLATING. .XXX= ±.005 ALL MACHINED SURFACES 64/ MAX. .XX= ±.01 ANG.±1/2° FRACTIONAL= ±1/64 Ⓢ.004 MAX. TIR. ⊥ AXIS .001		
SAN-TRON, INC. 4 NEWBURYPORT TPK. IPSWICH MA USA 01938 TEL: 978 - 356 -1585 FAX: 978 - 356 -1573 WWW. santron.com E MAIL: santron@santron.com			TITLE TYPE N ADAPTER, STRAIGHT, F-F		
MATERIAL: SEE NOTES			FINISH: SEE TABLE		
CAGE CODE: 50896			DWG NO. OL-0410-22-1		
SCALE X:X			REV. B		