

DESCRIPTION

LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR STANDARD PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR A SURFACE MOUNT COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. THIS MODEL PROVIDES THE FOLLOWING PERFORMANCE. DATA IS AVAILABLE UPON REQUEST.

SPECIFICATIONS

- FREQUENCY RANGE: 24.0 to 25.0 GHZ
- GAIN: 30dB TYPICAL
- GAIN FLATNESS: ± 0.75 dB MAX @25°C
- NOISE FIGURE: 2.5dB TYPICAL
- OP1dB: 8dBm MINIMUM
- VSWR (IN/OUT): 2.0:1 MAXIMUM
- CONNECTORS: SMA (F) REMOVABLE
- DC SUPPLY: +12 TO +15 VDC
- DC CURRENT 120 mA MAX

FEATURES

- INTERNAL VOLTAGE REGULATION
- UNCONDITIONAL STABILITY
- STANDARD OPERATING TEMPERATURE -20 to +70° C

AVAILABLE OPTIONS

- VARIOUS PACKAGE TYPES
- VARIOUS CONNECTOR TYPES
- TEMPERATURE COMPENSATION
- HERMETIC SEALING
- GAIN AND PHASE MATCHING
- MIL-STD-883 SCREENING AVAILABLE

ENVIRONMENTAL RATINGS


- TEMPERATURE: -20°C TO + 70°C (OPERATING)
-55°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	—	PRELIMINARY	09/25/15

MECHANICAL OUTLINE

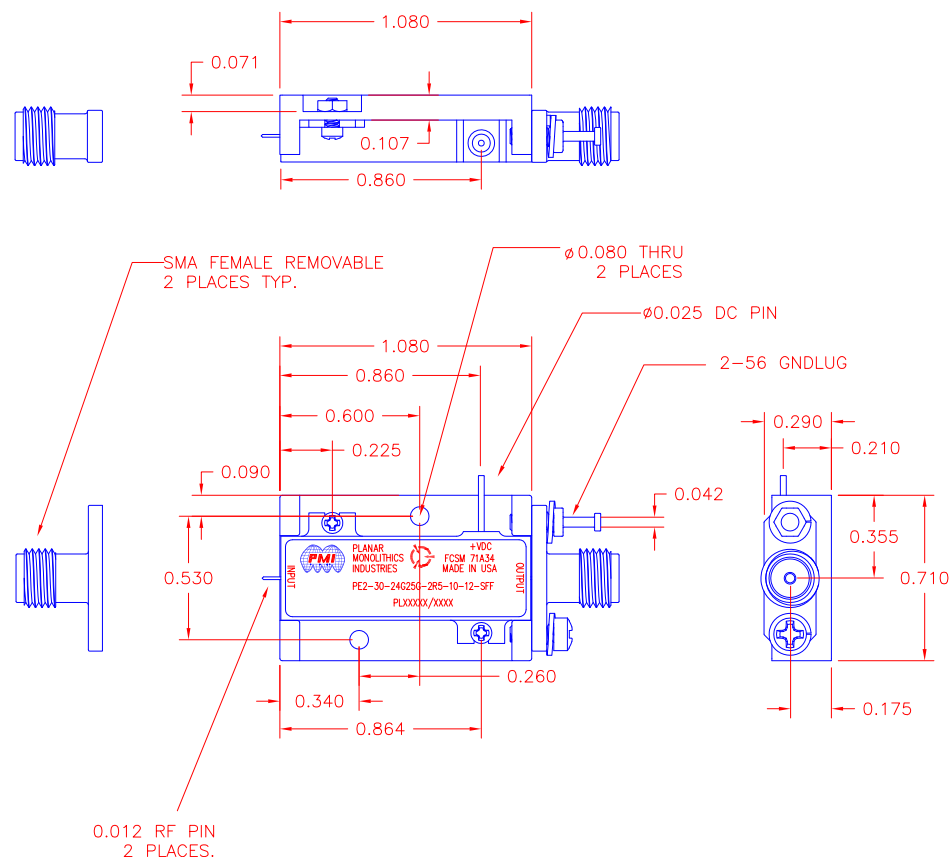

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

4921 ROBERT MATHEWS PARKWAY, SUITE 1
EL DORADO HILLS, CA 95762
TEL: 916-542-1401 FAX: 916-265-2597
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE			
DRAWN		09/25/15		PRODUCT FEATURE			
CHECKED				PE2-30-24G25G-2R5-10-12-SFF			
ISSUED				PRELIMINARY			
SCALE		N:S		SIZE		FSCM NO.	
				A		71A34	
				DWG NO.		PRELIMINARY	
				SHEET		1 OF 1	