

8 7 6 5 4 3 2 1

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

Frequency Range: 0.5 to 0.8 GHz
Gain: 22dB Typ.
Gain Flatness: +/-0.25dB Max.
Noise Figure: 1.2dB Typ.
OP1dB: 16dBm Min.
VSWR Input/Output: 1.8:1 Max.
DC Voltage Supply: +12 to +15VDC
DC Current Draw: 100mA Max.

Features:

Internal Voltage Regulation
Unconditional Stability
Standard Operating Temperature -20 to +70 Deg. C

Available Options:


Various Package types
Various Connector types
Temperature Compensation
Hermetic Sealing
Gain and Phase Matching
MIL-STD-883 Screening Available

Environmental Ratings:


Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C Available)
-55 to +125 Deg. C (Storage)
Humidity: MIL-STD-202F, METHOD 103B COND B.
Shock: MIL-STD-202F, METHOD 213B COND B.
Altitude: MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

PE2 HOUSING WITH CARRIER

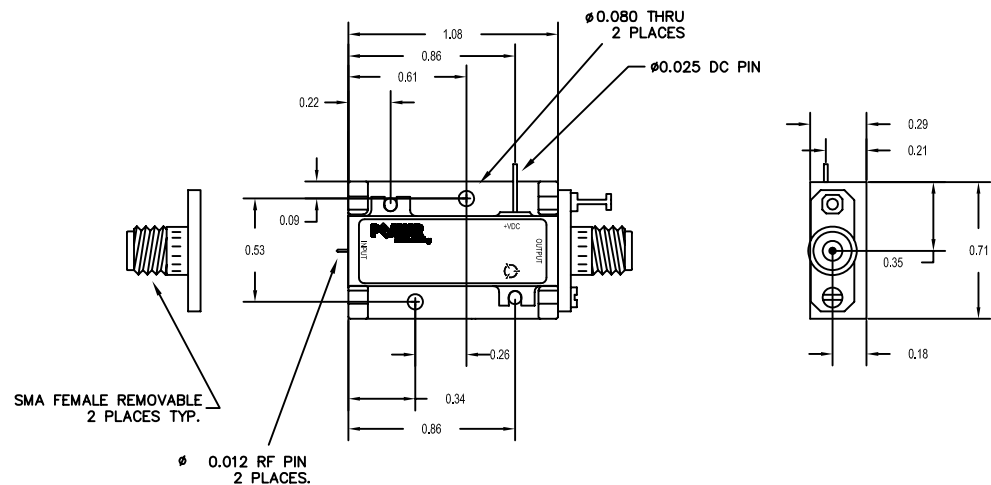

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

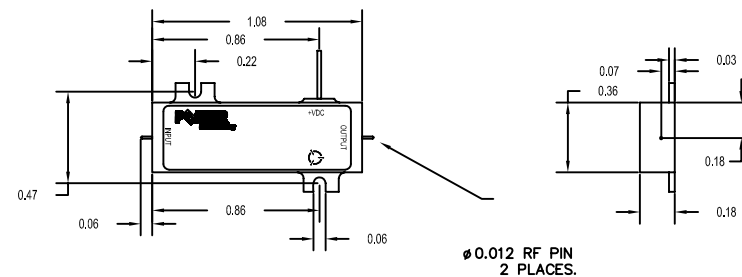

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ± 0.010 ±
± .XXX ± 0.005 ±

PART NO.		REVISIONS		DATE		APPROVED	
ZONE	REV.	DESCRIPTION					
-	-	ORIGINAL RELEASE		2/1/08			

MATERIAL:	6061-T6 Aluminum	FINISH:	Gold Plate over Nickel	DO NOT SCALE DRAWING
APPROVALS	DATE	DRAWN	K Mason	2/21/08
CHECKED		ISSUED		
SCALE	N/A	SIZE	1LK53	WEB - MODEL A
1		2		3

5715 Industry Lane, Unit 11 FREDERICK, MARYLAND	PRODUCT FEATURE PE2-22-0R50R8-1R2-18-12-SFF	1 OF 1
--	--	--------