

***** THIS DRAWING AND ITS CONTENTS ARE THE SOLE PROPERTY OF PRECISION CONNECTOR INC. AND ARE SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED *****

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	05/07/12	MJK	MJK

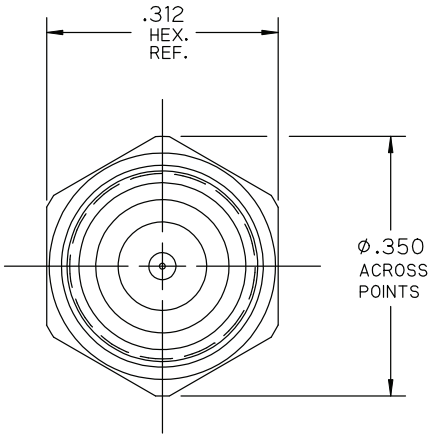

NOTE: DISTANCE FROM END OF CABLE CENTER COND. TO REF. PL. IS .100

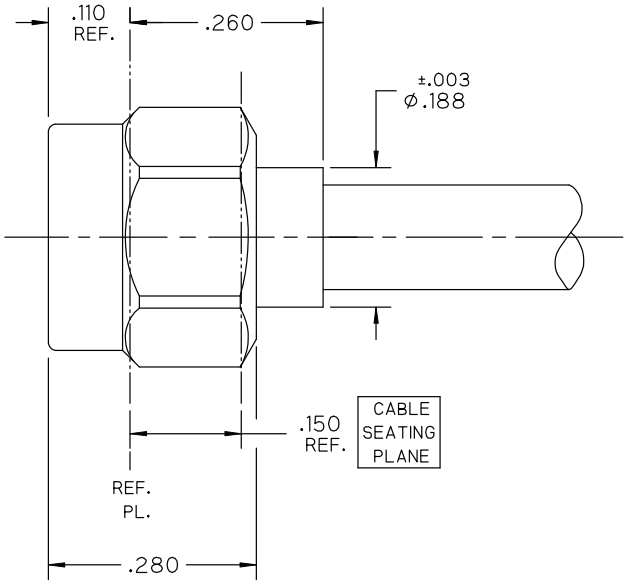

NOTES :

1.0 MATERIALS:

1.1 BODY & COUPLING NUT: STEEL. CORROSION RESISTANT PER ASTM-A582. UNS NO. S30300.

1.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM-B196. UNS NO. C17300.

1.3 GASKET: SILICONE RUBBER PER A-A-59588.

1.4 DIELECTRIC BEAD: POLYCHLOROTRIFLUOROETHYLENE (PCTFE) PER ASTM-D1430-95. (KEL-F)

2.0 FINISHES:

2.1 BODY & CENTER CONTACT: GOLD PLATE PER ASTM-B488. 50 MICROINCHES MIN. THK. OVER ELECTROLYTIC NICKEL PLATE PER ASTM-B689 50 MICROINCHES MIN. THK.

2.2 COUPLING NUT: GOLD PLATE PER ASTM-B488. 50 MICROINCHES MIN. THK. OVER ELECTROLYTIC NICKEL PLATE PER ASTM-B689 50 MICROINCHES MIN. THK.

2.3 GASKET & DIELECTRIC BEAD: NONE.

3.0 INTERFACE PER PCI-2.92mm-PIN.

4.0 CENTER CONTACT AND COUPLING NUT SHIPPED UNASSEMBLED.

Precision Connector, Inc.

TOLERANCES UNLESS OTHERWISE SPECIFIED	
.XX	± .02
.XXX	± .005
.XXXX	± .0005
ANGLES	± 2°

DRAWN BY: MJK
DATE: 05/07/12
CAGE CODE: 4MJR5
PART DESCRIPTION: 2.92mm PLUG. DIRECT SOLDER FOR RG-402 CABLE
SCALE: 6:1
SHEET NO.: 1 OF 1
DRAWING NUMBER: 3208-0L
REV: A