

DATE REVISED: 7/18/02

CATALOG NUMBER	"A" INTERFACE
0119-266-3-FD	FULL DETENT
0119-266-3-LD	LIMITED DETENT
0119-266-3-SB	SMOOTH BORE



MATERIAL AND FINISH

SHROUD:	CRES 303; PASSIVATED
CENTER CONTACT:	BeCu; GOLD PLATE 50-100 MICROINCHES OVER NICKEL PLATE 50 MICROINCHES MIN.
DIELECTRIC:	ULTEM 1000 (POLYETHERIMIDE)

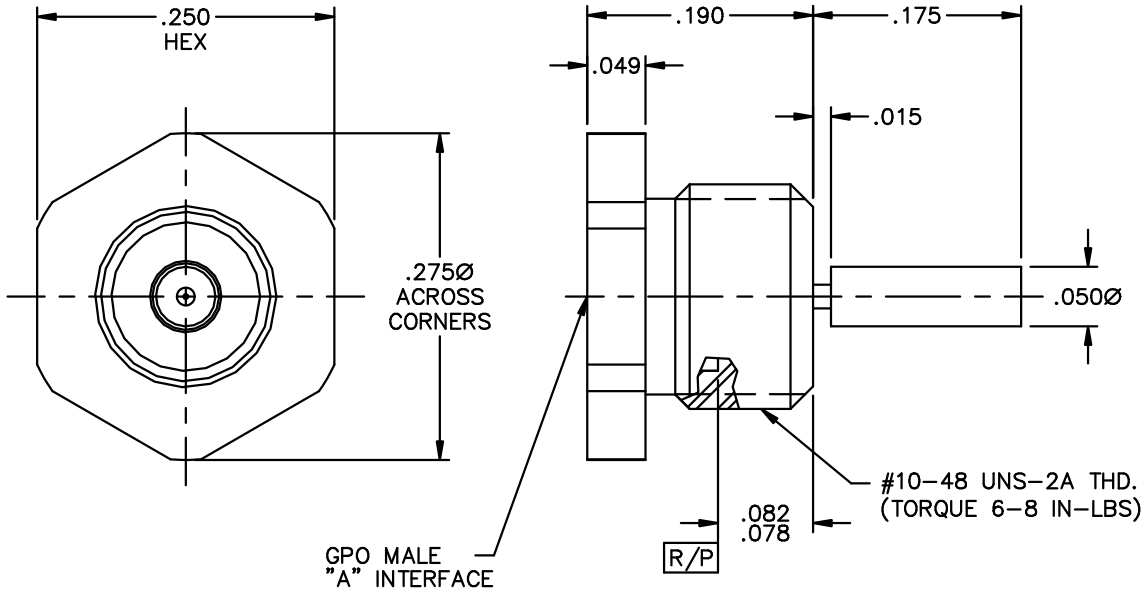

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

GPO MALE THREAD-ON WAVEGUIDE LAUNCH (TAB DETENT)	IDENT CODE: 82316 REVISION: C	**Corning Gilbert Inc.**
SOURCE FILE: SK-1784	DWG. NO.: OL-0119-266-3-TAB	ASSY. PROC.: -