



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	02/09/17	HAF JAY

DESCRIPTION:

PMI Model A-3D-001040-28-23P is an ultra wide bandwidth medium power low noise amplifier. It is unconditionally stable over operating temperature. The amplifier is DC voltage regulated and reverse voltage polarity protected internally.

SPECIFICATIONS AT +23 °C UNLESS OTHERWISE INDICATED:

- Frequency Range: 0.1 to 4.0 GHz
- Gain: 32 dB min.
- Pass Band Flatness: ±1.5 dB max. peak to peak
- Noise Figure: 2.8 dB max. Guaranteed from 200 MHz and above.
- VSWR In: 2.0 : 1 max.
- VSWR Out: 2.0 : 1 max.
- P1dB Out: 23.0 dBm min.
- DC Power Supply: +15 VDC @ 250 mA nominal
- Connectors (In/Out): SMA female, field replaceable
- Finish: Gold plated

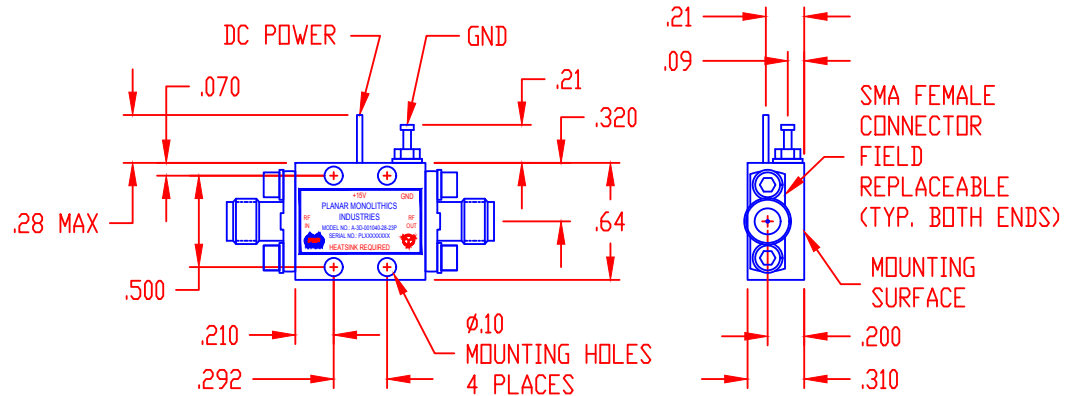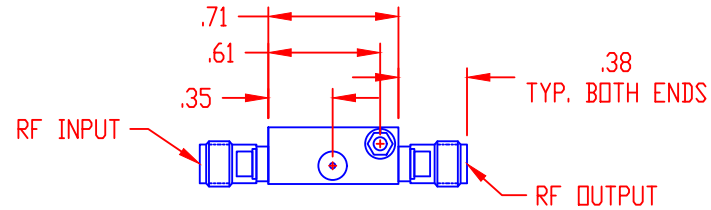

MECHANICAL OUTLINE

ENVIRONMENTAL RATINGS

- **TEMPERATURE:** -55°C TO + 85°C (OPERATING)
..... -65°C TO +125°C (STORAGE)
- **HUMIDITY:** MIL-STD-202F, METHOD 103B COND. B
- **SHOCK:** MIL-STD-202F, METHOD 213B COND. B
- **VIBRATION:** MIL-STD-202F, METHOD 204D COND. B
- **ALTITUDE:** MIL-STD-202F, METHOD 105C COND. B
- **TEMPERATURE CYCLE:** MIL-STD-202F, METHOD 107D COND. A

NOTES: 1: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
2: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES
TOLERANCES:

X.XX ±0.01
X.XXX ±0.005

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001:2008 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN <i>HAF JAY</i>		02.09.17	PRODUCT FEATURE		
CHECKED			A-3D-001040-28-23P		
ISSUED	SIZE	FSCM NO.	DWG NO.	REV.	
	A	05XQ0	D2-3A	A1	
	SCALE	N:S	SHEET	1 OF 1	