
CATALOG #	PART REV.	"A" DETENT
0119-876-3-SB	A	SMOOTH BORE
0119-876-3-LD	A	LIMITED DETENT
0119-876-3-FD	C	FULL DETENT

REV.	DESCRIPTION	DATE	BY
C	SEE ECO GM-8951	11/10/98	JRM

MATERIAL AND FINISH

SHROUD: CRES 303 PER ASTM A 484 AND ASTM A 582 OR ASTM A 555 AND ASTM A 581. PASSIVATE PER MIL-F-14072 E300.

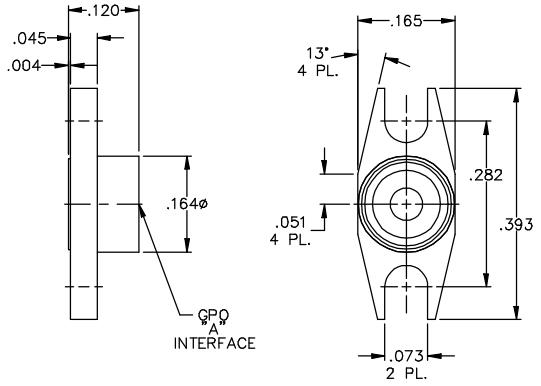

This drawing and any data contained therein is the property of Gilbert Engineering Co., Inc. and shall not be used in whole or part without written permission. The possession of this drawing confers or transfers any right to duplicate, use, or disclose any information contained hereon except as expressly authorized by Gilbert Engineering Co. Inc.

ALL DIMENSIONS ARE IN INCHES

CAT. NO. 0119-876-3-TAB

CODE IDENT NO. 82316

GILBERT ENGINEERING CO., INC.

BY	DATE
DRAWN: MJC	1/28/97
ASSEMBLY PROCEDURES: NONE	
SOURCE FILE: MECR #330, #637	SHT. 1 OF 1

TITLE: OUTLINE DRAWING FOR GPO SLOTTED SHROUD (TABULATED DETENT)

DWG. NO. OL-0119-876-3-TAB