
REV.	DESCRIPTION	DATE	BY
B	SEE ECO GM-10769	11/15/99	JRM

MATERIAL AND FINISH

HOUSING AND BUSHING:	CRES 303 PER ASTM A 484 AND ASTM A 582 OR ASTM A 555 AND ASTM A 581. PASSIVATE PER MIL-F-14072 E300.
CENTER CONTACT:	BERYLLIUM COPPER PER ASTM B 196 AND/OR ASTM B 197. GOLD PLATE PER MIL-G-45204; TYPE I, GRADE C, CLASS 1. OVER NICKEL PER QQ-N-290A; CLASS 1; 50 MICROINCHES MIN.
DIELECTRICS:	VIRGIN PTFE FLUOROCARBON PER ASTM D 1710 AND ASTM D 1457.

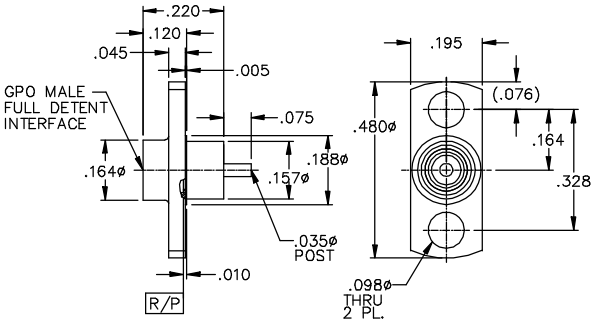

This drawing and any data contained therein is the property of Gilbert Engineering Co., Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Gilbert Engineering Co. Inc.

ALL DIMENSIONS IN INCHES | CAT. NO 0119-813-3 | CODE IDENT NO. 82316

GILBERT ENGINEERING CO., INC.

DRAWN: JRM	DATE 11/15/99
ASSEMBLY PROCEDURES: NONE	
SOURCE FILE: MECR #1302	SHT. 1 OF 1

TITLE: OUTLINE DRAWING FOR GPO MALE 2 HOLE FLANGE MOUNT STRAIGHT TERMINAL

DWG. NO. OL-0119-813-3 | REV B