

CATALOG #	"A" DETENT
00219-215-3-SB	SMOOTH BORE
00219-215-3-LD	LIMITED DETENT
00219-215-3-FD	FULL DETENT

OCS PLM CONTROLLED

REV.	DESCRIPTION	DATE	BY
F	SEE ECO GM-11572	4/19/00	MJC

MATERIAL AND FINISH

HOUSING, SHROUD,
AND COUPLING NUT:

CRES 303 PER ASTM A 484
AND ASTM A 582 OR ASTM A 555
AND ASTM A 581. PASSIVATE PER
MIL-F-14072 E300.

HOUSING ADAPTOR
AND CONTACT:

BERYLLIUM COPPER PER ASTM
B 196 AND/OR ASTM B 197.
GOLD PLATE PER MIL-G-45204;
TYPE I, GRADE C, CLASS 1.
OVER NICKEL PER QQ-N-290A;
CLASS 1; 50 MICROINCHES MIN.


DIELECTRICS:

VIRGIN PTFE FLUOROCARBON PER
ASTM D 1710 AND ASTM D 1457.

RETAINING RING:

BERYLLIUM COPPER PER ASTM
B 196 AND/OR ASTM B 197.

GPO MALE
"A" INTERFACE

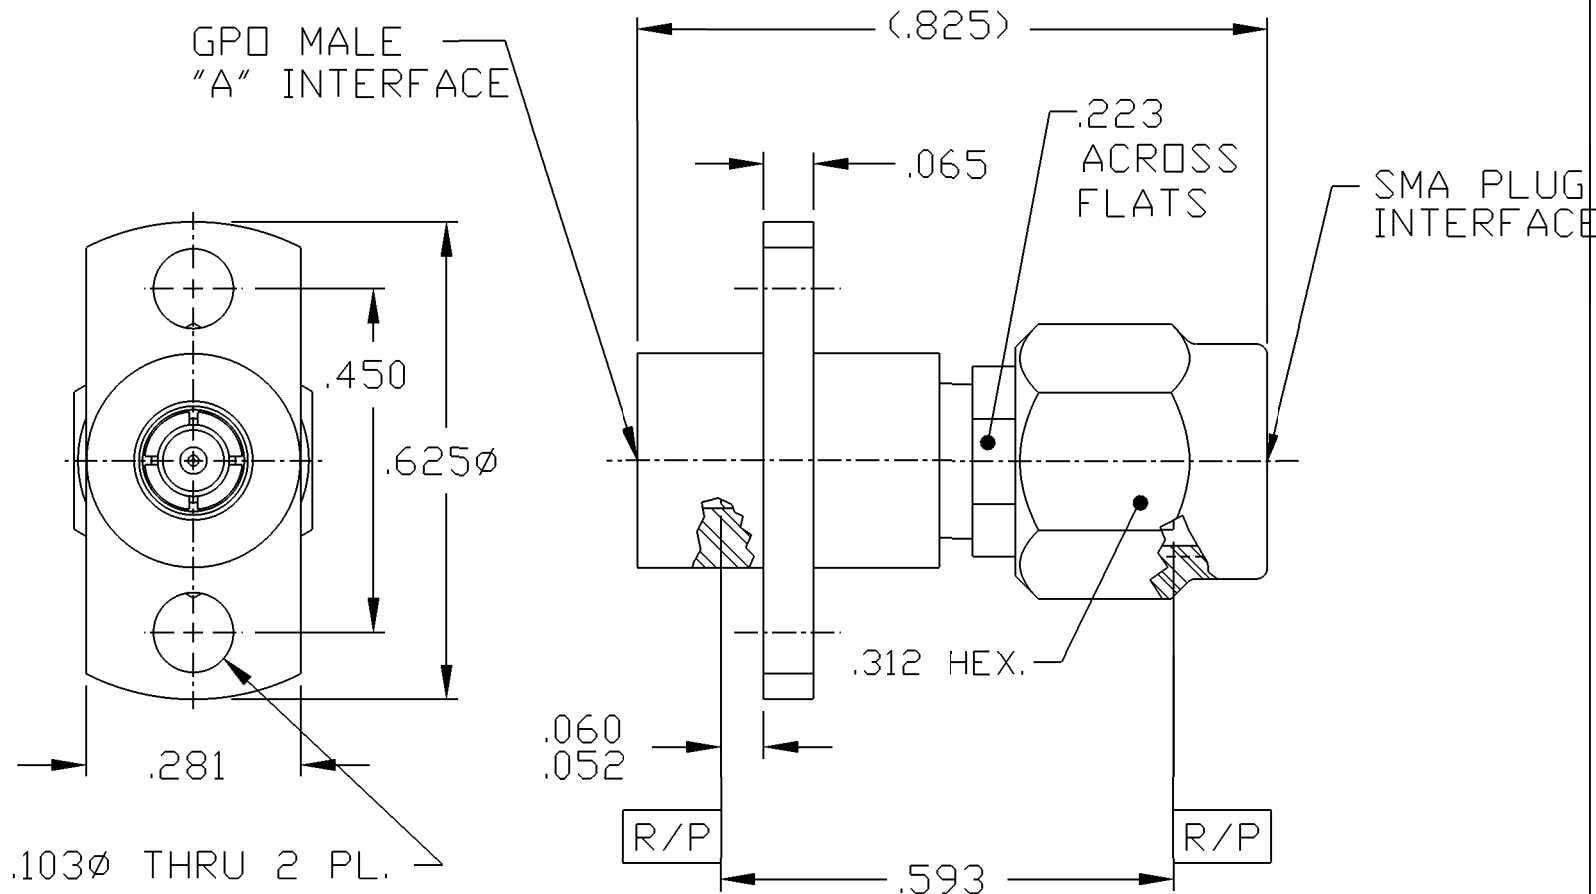

This drawing and any data contained therein is the property of Gilbert Engineering Co., Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Gilbert Engineering Co., Inc.

ALL DIMENSIONS IN INCHES

CATALOG NUMBER

00219-215-3-TAB

CODE IDENT NO.

82316

DRAWN:

GILBERT ENGINEERING CO., INC.

TITLE

OUTLINE DRAWING FOR GPO MALE
(TAB DETENT) 2 HOLE FLANGE
MOUNT TO SMA PLUG ADAPTOR

DATE

12/3/92

DWG. NO.

01-00219-215-3-TAB

REV

F

SOURCE FILE: SK-1014

SHT. 1

OF 1

Date: 9/18/2017 09:34AM

Component: 01002192153TAB.DWG, Version: 7