REV.	DESCRIPTION	DATE	BY
B	SEE ECO GM-11439	3/22/00	MJC

MATERIAL AND FINISH

GPO EDGE MOUNT AND NUT:	CRES 303 PER ASTM A 484 AND ASTM A 582 OR ASTM A 555 AND ASTM A 581. PASSIVATE PER MIL-F-14072 E300.
PIN CONTACT AND BACK SHELL:	BERYLLIUM COPPER PER ASTM B 196 AND/OR ASTM B 197. GOLD PLATE PER MIL-G-45204; TYPE I, GRADE C, CLASS 1. NICKEL PER QQ-N-290A; CLASS 1; 50 MICROINCHES MIN.
DIELECTRICS:	VIRGIN PTFE FLUOROCARBON PER ASTM D 1710 AND ASTM D 1457.
LOCK WASHER:	400 SERIES STAINLESS STEEL.

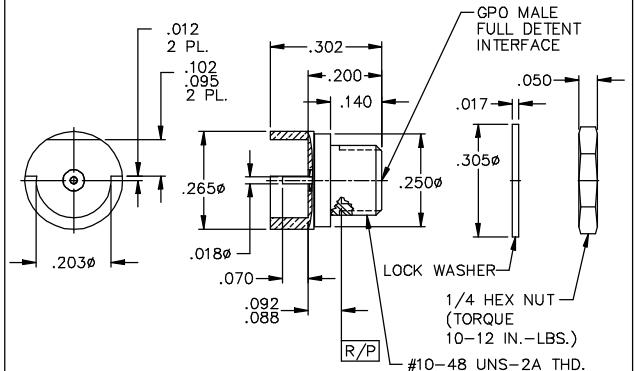

This drawing and any data contained therein is the property of Gilbert Engineering Co. Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Gilbert Engineering Co. Inc.

ALL DIMENSIONS IN INCHES	CATALOG NUMBER 0119-796-3	CODE IDENT NO. 82316	
DRAWN: REL	GILBERT ENGINEERING CO., INC.		
DATE 6/25/93	TITLE OUTLINE DRAWING FOR GPO MALE FULL DETENT EDGE MOUNT		
ASSEMBLY PROCEDURES: NONE	DWG. NO. OL-0119-796-3	REV B	
SOURCE FILE: MECR# 1414	SHT. 1 OF 1		