

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01_0	RELEASED	6-28-89	S.T.M.

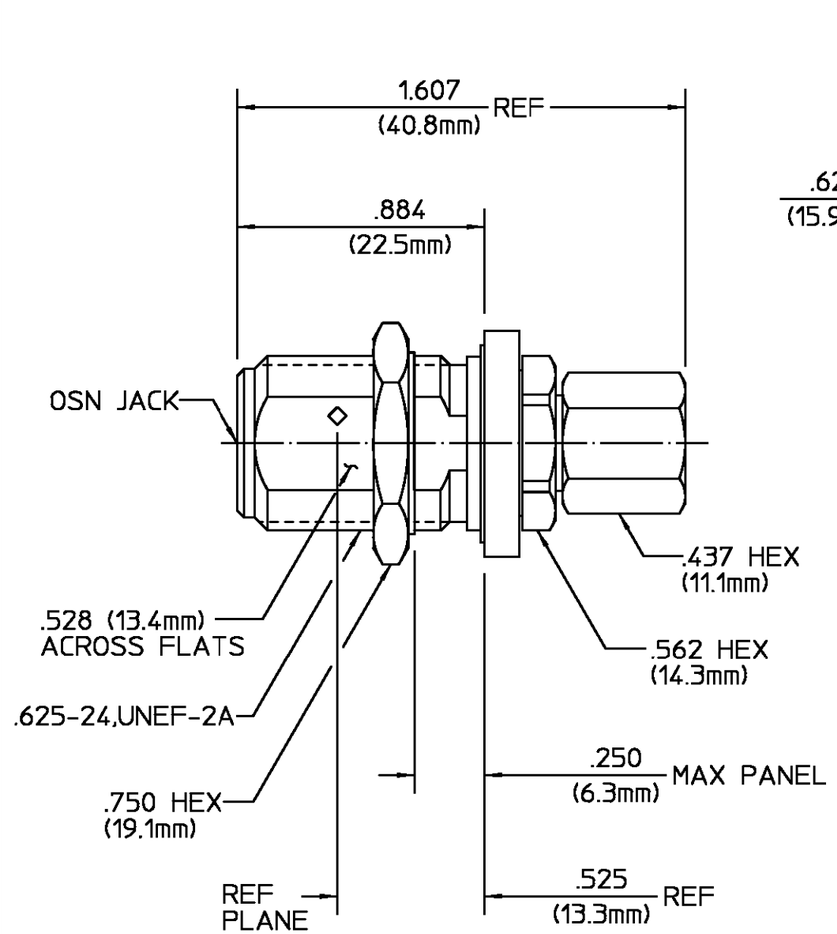

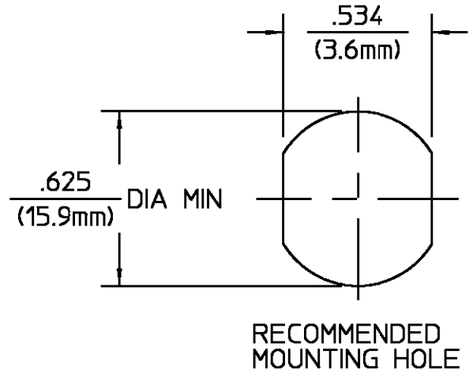

RECOMMENDED
MOUNTING HOLE

COMPONENT	MATERIAL	FINISH
HOUSING CLAMP NUT MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457, MIL-P-19468, AND FED. SPEC L-P-403	N/A
CENTER CONTACT BUSHING	BERYLLIUM COPPER PER QQ-C-530, ALLOY 173	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
GASKET O-RING	SILICONE RUBBER PER ZZ-R-765	N/A

NOTES:
1. DESIGNED FOR USE WITH .250 DIA SEMI-RIGID CABLE.

CABLE ENTRY DIAMETER MINIMUM	
CONTACT	.065

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCE ON
FRAC. ± 1/64 DEC. ±.005 ANGLES ± 1°

These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.

DRAWN BY L.ROSS DATE 6-28-89
CHECKED BY C.W. 6-28-89
APP'D BY S.T.M. 6-28-89

USE ASS'Y PROCEDURE
408-04898
NO. A.P. (30-024)

AMP
AMP Incorporated
140 Fourth Avenue
Waltham, MA 02451-7599

TITLE OSN BULKHEAD FEEDTHROUGH CABLE JACK-COMPRESSION CLAMP ATTACHMENT

SIZE	CODE IDENT NO.		REV
B	26805	3004-7750-02	01_0
SCALE 2:1			SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1057151-1
SHEET 1 OF 1 REV A