


DESCRIPTION

LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR STANDARD PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR A SURFACE MOUNT COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. THIS MODEL PROVIDES THE FOLLOWING PERFORMANCE. DATA IS AVAILABLE UPON REQUEST.

SPECIFICATIONS

- FREQUENCY RANGE: 0.25 TO 10.0 GHz
- GAIN: 60 dB TYPICAL
- GAIN FLATNESS: ± 1.25 dB MAXIMUM
- NOISE FIGURE: 4.75 dB TYPICAL
- OP1dB: 13 dBm MINIMUM
- VSWR (IN/OUT): 2.0:1 MAXIMUM
- CONNECTORS: SMA (F) REMOVABLE
- DC SUPPLY: +12 TO +15 VDC
- DC CURRENT DRAW: 280 mA MAXIMUM
- FINISH GOLD PLATED

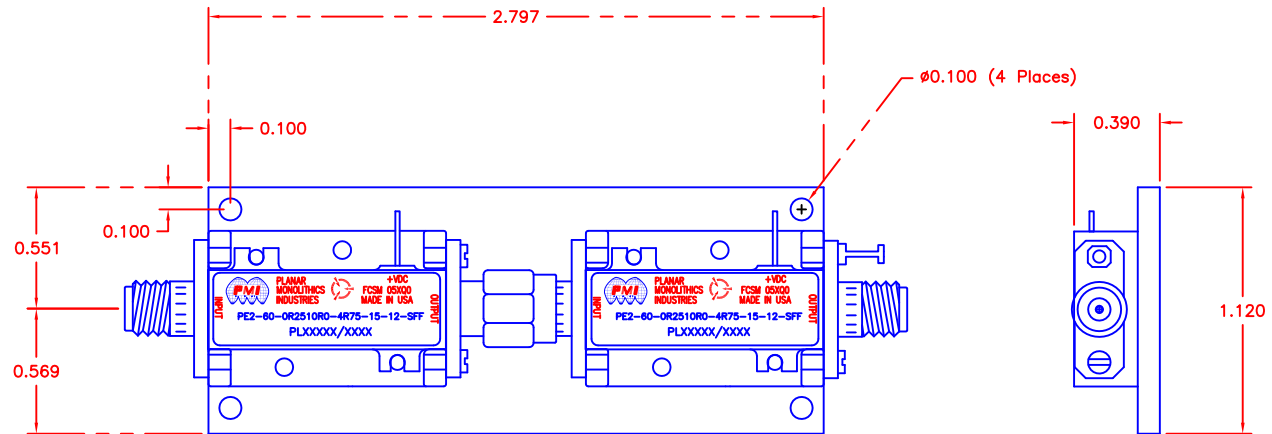

ENVIRONMENTAL RATINGS

- TEMPERATURE: -40°C TO + 85°C (OPERATING)
-40°C TO +100°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	PRELIMINARY	08/11/16	

MECHANICAL OUTLINE

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN <i>EMF</i>		08/11/16		PRODUCT FEATURE	
CHECKED				PE2-60-OR2510R0-4R75-15-12-SFF	
ISSUED				PRELIMINARY	
SCALE N:S		SHEET 1 OF 1			